


1009960100

# Microphone Amplifier

For Dynamic Microphone- Madr

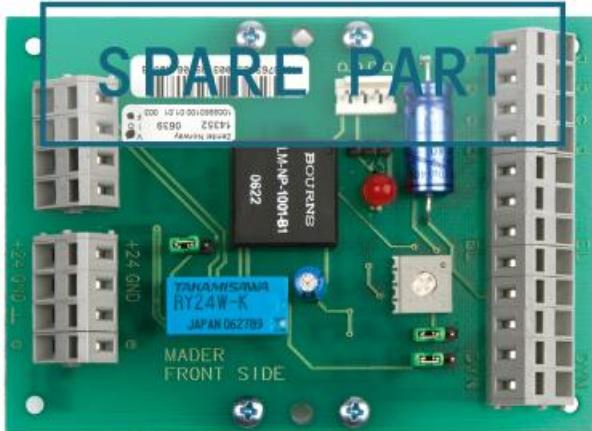

## Description

- ✓ Amplified Calling: Through separate loudspeaker
- ✓ Two-way speech communication through separate loudspeaker
- ✓ Accepts audio inputs from dynamic microphones
- ✓ Adjustable input level
- ✓ RCO input with relay and relay driver
- ✓ Fastens onto mounting rail in AlphaCom exchange

The RCOinput on this board has optional high or low polarity, determined by switch setting on the board. The board can thus be used in AlphaCom system as well as in the TouchLine Compact system.

The board is used for features that involve calling through loudspeakers, and provides the possibility to answer through a separate loudspeaker.

The board accepts audio inputs from dynamic microphones, and the input level is adjustable.

The built-in relay is needed when you answer in the calling speaker. The board must then be supplied with power.

The MADRis fastened onto the mounting rail on the connection field of the AlphaCom exchange

# Specifications

## GENERAL

Order number	1009960100
Input Voltage:, Maximum Current:	+24 V DC, 30 mA (relay)
Cable, Requirements between the board and the exchange	Regular installation cable with screen
Recommended room temperature	0°C to +35°C , +32°F to +95°F
Humidity Range (non- condensing)	10% - 90% RH
Dimensions	70 x 100 mm, 2.7" x 3.9"
Connector types	Spring terminals, AMP MTA 100 connector

ORDER NUMBER	DESCRIPTION	SHIP WEIGHT
1009960100	Microphone Amplifier for Dynamic Microphone - MADR	