1008401190

IPDMHB-V2_P

IP Tischsprechstelle mit Handhörer (schwarz)-V2_P



- Kompatibel mit ICX-AlphaCom, IC-EDGE und SIP
- Großes, kontrastreiches Display mit Hintergrundbeleuchtung für hervorragende Lesbarkeit
- Vier dynamische Navigationstasten für den schnellen Zugriff auf Systemmenüs und Verzeichniseinträge.
- Zehn DAK-Tasten ermöglichen den Zugriff auf Stationen, Gruppenrufe, Audioüberwachung, öffentliche Adresszonen, Funkkanäle und Telefonleitungen mit nur einem Tastendruck.
- Remote-Software-Upgrade, -Konfiguration und -Überwachung
- Stromversorgung über das IP-Netzwerkkabel mittels Power over Ethernet (PoE)

Zenitel Connect | SIP | IC-Edge | ICX-AlphaCom | HD Voice | Active Noise Cancelling | Open Duplex

Beschreibung

Das IP Desk Master-V2_P ist ein universelles Tischtelefon, das sowohl für die tägliche Verwaltungskommunikation als auch für die Sicherheitskommunikation in Leitstellen eingesetzt werden kann. Wie alle Zenitel-Produkte bietet auch das IP Desk Master-V2_P hervorragende Audioqualität. Möglich wird dies durch fortschrittliche Technologien wie aktive Rauschfilterung, akustische Echokompensation, Breitband-Audiocodec und leistungsstarke Audioausgänge.


Siehe auch: zusätzliche Dokumentation auf wiki.zenitel.com

Technical Dimensions

www.zenitel.com info@zenitel.com Last revision date: 2026-08-31 10:25

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

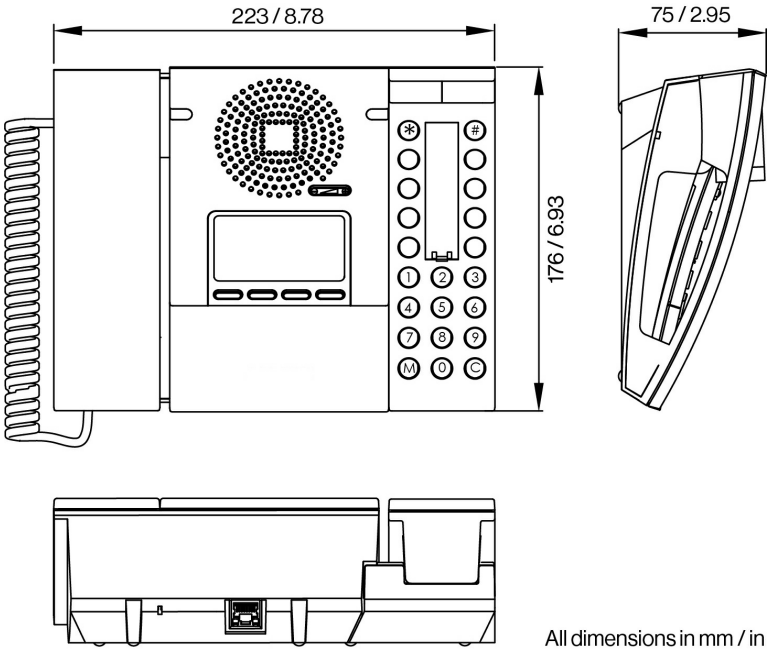

All dimensions in mm / in

www.zenitel.com info@zenitel.com Last revision date: 2026-08-31 10:25

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Spezifikationen

ALLGEMEIN	
Abmessungen (B x H x T)	225 x 75 x 176 mm
Gewicht	0,7 kg
Anzeige	Hintergrundbeleuchtetes Display, 35 x 68 mm (64 x 128 Pixel)
Temperaturbereich	0˚C - 55˚C
Relative Luftfeuchtigkeit	< 95 % nicht kondensierend
IP-Schutzart	IP-42
Stromverbrauch	Power over Ethernet, IEEE 802.3 af, Klasse 0 Leerlauf 4W, max. 8W
Anschlüsse	2 x RJ45 (Ethernet) 10/100 Mbit/s
SIP	RFC 3261, SIP-Info (DTMF), RFC 2833 (DTMF)
IP-Protokolle	IP v4 – TCP – UDP – HTTPS – TFTP – RTP – RTCP – DHCP – SNMP – DiffServ – TOS – ONVIF – CC oIP® – SIP
LAN-Protokolle	Power over Ethernet (IEEE 802.3 af), VLAN (IEEE 802.1pq), Netzwerkzugriffskontrolle (IEEE 802.1x)
Audiotechnik	Breitband 200 Hz – 7 kHz (G.722) Telefonie 3,4 kHz (G.711) Aktive Geräuschfilterung Akustische Echounterdrückung Aktive Geräuschfilterung Telefonie 3,4 kHz (G.711) Breitband 200 Hz – 7 kHz (G.722)
Audioausgang	1,5 Watt, 85 dB Audiodruck 1 m vom Lautsprecher entfernt
Management und Betrieb	HTTPS (Webkonfiguration) DHCP und statische IP Automatische Remote-Softwareaktualisierung Zentralisierte Überwachung Status-LED
Einhaltung	CE und FCC Teil 15
Garantie	2 Jahre Standardgarantie, verlängerbar auf insgesamt 5 Jahre (Aufpreis)

Zubehör

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.



Wall Bracket for Desktop

Artikelnummer 1008091100

www.zenitel.com info@zenitel.com Last revision date: 2026-08-31 10:25

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.