

1490005010

## ITSV-5

HD IP Video Phone with 8" Screen



- ✓ 16 lines with up to 16 SIP accounts
- ✓ 8" (1280×800) capacitive 10-point touch screen HD IPS LCD
- ✓ Built-in 2 mega-pixel CMOS tiltable camera with privacy shutter
- ✓ 12-way audio conferencing and 3-way 1080p 30fps video conferencing capability
- ✓ Dual-mic HD speakerphone with noise reduction, advanced echo cancellation, and excellent double-talk performance
- ✓ Seamless Integration - Fully compatible with Zenitel Connect Pro, ICX-AlphaCom, IC-EDGE, and SIP-based systems.

 Zenitel ConnectPRO  
  Video Intercom  
  SIP  
  Bluetooth  
  IC-Edge  
  ICX ICX-AlphaCom  
 Audio  
  HD Voice  
 Video


 H.264

### Kuvaus

The ITSV-5 is a powerful IP video phone featuring Android 11, an 8" touch screen, real-time HD video telephony, built-in WiFi, Bluetooth, and more. The ITSV-5 delivers advanced SIP telephony features and out-of-the-box integration with our Zenitel Connect Pro, IC-EDGE and ICX-AlphaCom IP Intercom Platforms.

For more information go to [Zenitel Wiki](#)

### Technical Dimensions

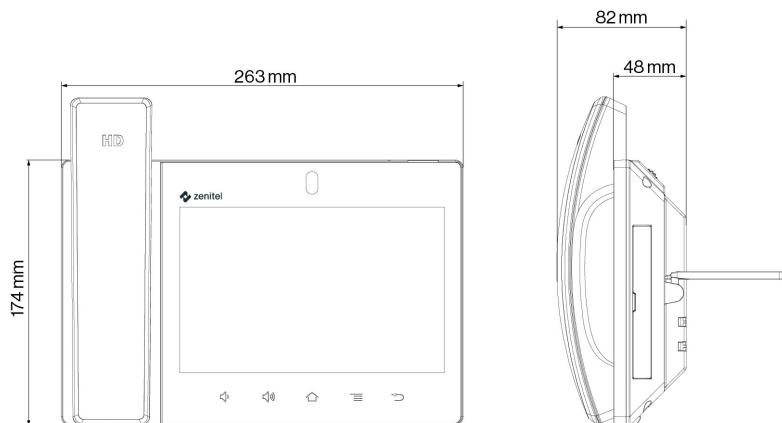

page 1/4

# Specifications

## GENERAL

Graphic Display	8" (1280x800) capacitive (10 points) touch screen IPS LCD
Camera	Tilttable 2 mega-pixel CMOS camera with privacy shutter, 1080P@30fps
Auxiliary Ports	RJ9 headset jack (allowing EHS with Plantronics headsets), 3.5mm stereo headset with microphone, USB 3.0 port, Type-C, HDMI-out, HDMI-in
Feature keys	2 function touch keys VOLUME +/-, 3 dedicated Android touch keys HOME, MENU, and BACK
Video Codec	H.263, H.264 BP/MP/HP
Video resolution	Up to 1080p
Video frame rate	Up to 30 fps
Operating temperature range	0°C to +40°C
Storage temperature range	-10°C to +60°C
Relative humidity	10% - 90% non-condensing
Power options	Power over Ethernet (PoE & PoE+) or power adapter.
Power over Ethernet	802.3af Class 3, 802.3at Class 4
Power adapter	Input: 100-240VAC 50-60Hz; Output 12VDC 1.5A
Network Interface	2 x RJ45 (Ethernet) 10/100/1000 Mbps with integrated PoE/PoE+
Bluetooth	Integrated, Bluetooth 5 + EDR
Wi-Fi	Integrated, dual-band 2.4 & 5GHz with 802.11 a/b/g/n/ac/ax, 2T2R, WiFi Display & AirPlay
Security	User and administrator level passwords, MD5 and MD5-sess based authentication, 256-bit AES encrypted configuration file, TLS, SRTP, HTTPS, 802.1x media access control, Kensington Security Slot (Kensington Lock) support, anti-hacking secure boot
Protocols/Standards	SIP RFC3261, TCP/IP/UDP, RTP/RTCP, HTTP/HTTPS, ARP, ICMP, DNS (A record, SRV, NAPTR), DHCP, PPPoE, SSH, TFTP, NTP, STUN, SIMPLE, LLDP/MED, LDAP, TR-069, 802.1x, TLS, SRTP, IPv6, OpenVPN®.
Audio technology	Wide-band Opus, wide-band G.722, G.711μ/a, G.729A/B, G.726-32, iLBC, in-band and out-of-band DTMF (In audio, RFC2833, SIP INFO), VAD, CNG, AEC, PLC, AJB, AGC, ANS, Noise Shield 2.0
	English, German, Italian, French, Spanish, Portuguese, Russian

page 2/4

Language support	Spanish, Portuguese, Russian, Croatian, Chinese, Korean, Japanese, Czech.
Compliance	FCC: CFR 47 Part 15 Subpart B Class B; CFR 47 Part 15 Subpart C; CFR 47 Part 15 Subpart E; UL 60950-1 (power adapter); Part68 (HAC) CE: EN55032 Class B; EN55035;EN61000-3-2; EN61000- 3-3; EN62368-1; EN300328; EN301893; EN301489-1; EN301489-17; EN62311; RoHS RCM: AS/ACIF S040 AS/CA S004; AS/NZS CISPR 32; AS/NZS 62368.1; AS/NZS 4268 HDMI Source and Sink, HAC
Dimension (WxLxH)	263 x 174 x 48 (WxLxH) mm
Weight	1.08 kg
Warranty	2 Years standard warranty, extendible up to total of 5 years (additional fee)

## Accessories



Wall Mount Bracket for ITSV-5

## Used With



TCIV-2+ | Video intercom

IP and SIP Video Intercom



TCIV-3+ | Video intercom

IP and SIP Video Intercom



TCIV-5+ | Video intercom

IP and SIP Video Intercom



TCIV-6+ | Video Intercom

IP and SIP Video Intercom



TKIV+ Video Intercom kit

Turbine Video - VoIP Intercom Module



TEIV-4+ | Video Intercom with RFID card reader space

IP & SIP Video Intercom with RFID card reader space



TEIV-1+ | Video Intercom with Keypad and Display

IP and SIP Video Intercom with Keypad and Display