zenitel

DATASHEET



1008116020

TMIS-2

Turbine Mini IP

SIP ONVIF Conformant Turbine IC-Edge ICX-AlphaCom

Qualité de voix HD Contrôle automatique du gain Suppression de Bruit Active

Description

FONCTIONNALITÉS

- Compatible avec l'AlphaCom XE, Pulse et iPBX (SIP)
- Suppression de bruit-active
- Conception anti-vandalisme
- Face avant en acier inoxydable de calibre 11
- 1 bouton d'appel anti-vandalisme

www.zenitel.com info@zenitel.com Last revision date: 2026-01-30 14:02

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

- Excellente qualité audio grâce au Codec G.722 (7 kHz)
- Serveur Web intégré
- Mise à jour logicielle, configuration et surveillance à distance
- Surveillance de ligne
- 1 sortie de relais pour le contrôle des portes et de l'éclairage
- Bouton d'appel externe en option
- Amplificateur 10 W Classe D

DESCRIPTION
Le poste Turbine Mini IP 1008116020 est un appareil performant et résistant conçu pour une utilisation en intérieur. Il est utilisé comme point de communication, d'information ou d'urgence et se connecte directement au réseau IP, ce qui lui permet de fonctionner n'importe où et indépendamment de la distance qui le sépare du serveur.

IMPORTANT
Le poste ne peut être installé qu'en intérieur : le revêtement n'est pas conforme à une utilisation en extérieur et l'électronique n'est pas protégée par un étui en plastique.


Ce poste, qui utilise la technologie SIP, est compatible avec le serveur AlphaCom ainsi que Pulse et iPBX. Lorsqu'il est connecté à l'AlphaCom, le poste offre des services CCoIP tels que la diffusion de messages d'urgence avec volume ajustable, la gestion des niveaux de priorité des appels, l'accès à l'AlphaNet et la programmation d'évènements. A l'instar de tous les postes Vingtor-Stentofon, il offre une excellente qualité audio grâce à des technologies de pointe comme la suppression de bruit active, le codec de la bande passante et des sorties audio très puissantes.

Il comporte un contact de relais, programmé et contrôlé par le serveur AlphaCom XE, qui peut être utilisé pour contrôle l'ouverture des portes et l'éclairage. Pour répondre le mieux à vos besoins et assurer le meilleur fonctionnement, le poste dispose de fonctionnalités de surveillance avancées. Il effectue des tests afin de détecter les possibles erreurs du réseau ou du système ainsi que des tests de tonalité qui vérifient tout le parcours de transmission, microphone et haut-parleur inclus (uniquement lorsqu'il est connecté à l'AlphaCom). L’état du poste est transmis à l’AlphaNet ainsi qu’aux systèmes tierce partie utilisant SNMP, Syslog ou OPC.

Technical Dimensions

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company’s Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

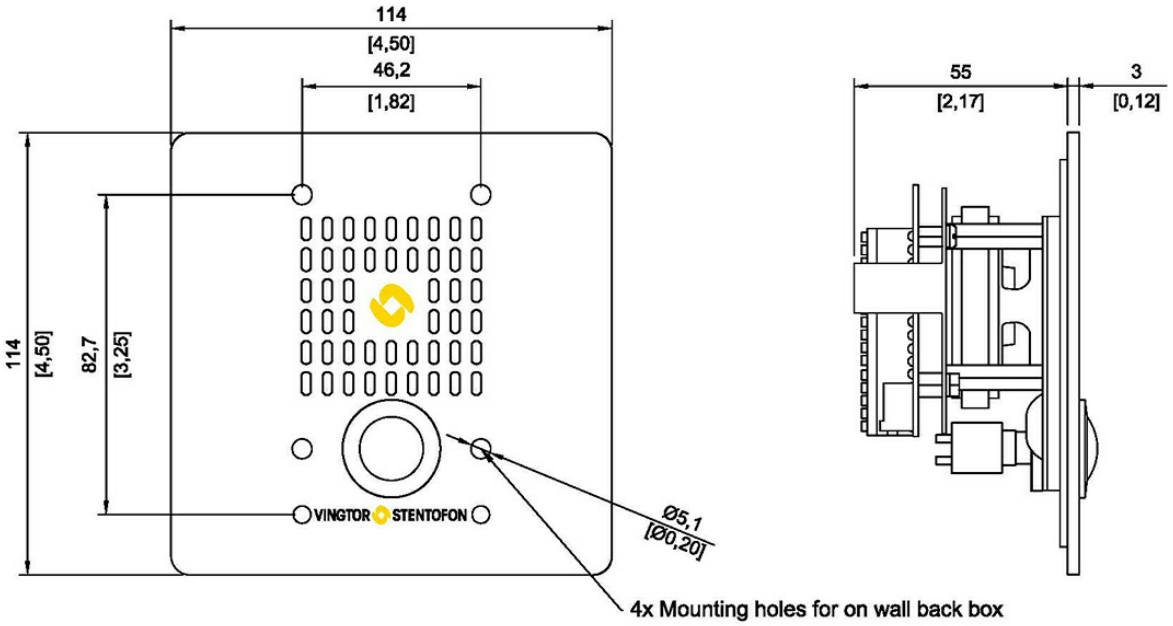

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Spécifications

SPÉCIFICATIONS:

Face avant	Acier inoxydable #304 de calibre 11
Dimensions (HxLxP)	4,5 x 4,5 x 2,5 cm
Indice de Protection IP	IP-64 lorsqu'il est installé tel que recommandé dans la description
Haut-parleur	Carré 2 x 2, 45 Ohm, 5 W, waterproof
Alimentation	Power over Ethernet, IEEE
	Alimentation locale 24 VDC
Indicateur	LED protégée par un cache rouge transparent, lentille Lexan en époxyde collée
Montage	Mural ou encastré, nécessite une profondeur de 51 mm
Connecteur	1 RJ45 (Ethernet) 10/100 Mbps
	6 entrées et sorties
	1 contact de relais
Protocoles IP	IP v4- TCP-HTTPS-TFTP-RTP-RTCP-DHCP-SNMP-DiffServ-TOS-Vingtor-Stentofon CCoIP
Protocoles LAN	Power over Ethernet (IEEE 802.3 a-f), VLAN (IEEE 802.1pq), Sécurité réseau (IEEE)

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Technologie audio	Bande large 200 Hz – 7 kHz (G.722)
	Téléphonie 3.4 kHz (G.711)
	Réduction acoustique de l'écho
	Open Duplex
	Tampon de gigue adaptatif
	Amplificateur 10 W Classe D
	Microphone électret
Gestion et opération	HTTPS (configuration Web)
	DHCP et IP statique
	Mise à jour logicielle à distance
	Surveillance centralisée
	LED d'indication d'état
Contrôle à distance	6 entrées et sorties sans outil et 1 contact de relais
Températures de fonctionnement	De -25° à 70° C
Températures de stockage	De -25° à 70° C

Accessoires

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.



TA-13

Turbine Mini On-Wall Back Box White

Référence Produit: 1008140130



TA-2

Boîtier d'encastrement pour Turbine Compact

Référence Produit: 1008140020



TA-3

Boîtier d'encastrement pour Turbine Mini

Référence Produit: 1008140030

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.