zenitel

DATASHEET

1007082000

# Poste principal industriel

Anti-bruits de fond




## Description

- Poste principal entière équipé avec plein accès à toutes les fonctionnalités Vingtor-Stentofon
- Boîtier robuste, étanche et résistant aux chocs en makrolon orange
- Microphone filtrant les bruits de fond avec collerette de protection
- Voyant rouge d'indication de mise en communication
- Amplificateur 10 W (8 Ohm) intégré géré par VOX
- A utiliser avec un haut-parleur externe avec ou sans amplificateur
- Raccordement simple des câbles sur bornier à vis

Ce poste principal industriel est un modèle étanche conçu pour les environnements extérieurs, humides, sales et






Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

poussiéreux. Son boîtier, résistant aux projections d'eau et aux chocs, est fabriqué en makrolon orange. La face avant, qui intègre un clavier complet, est montée sur charnière afin de faciliter l'installation et l'entretien du poste. Ce modèle possède un bornier à vis intégré. Les deux presse-étoupes permettent un raccordement des câbles étanche à l'eau et à la poussière.

Ce poste est équipé d'un microphone sélectif qui empêche les bruits de fond de perturber la communication. Vous pouvez ajouter un haut-parleur externe d'impédance de 20 à 70 Ohm connecté au poste sur la sortie non amplifiée ou d'impédance de 8 à 20 Ohm sur la sortie amplifiée. L'amplificateur intégré nécessite une alimentation séparée de 12 V AC / 2 A. Le haut-parleur externe doit être placé à au moins un mètre du poste. Son volume se règle grâce à un potentiomètre intégré au poste, lequel peur être programmé en mode Privé de manière permanente (à l'aide d'un strap situé à l'intérieur du poste) et auquel vous pouvez connecter un combiné extérieur.

# Technical Dimensions

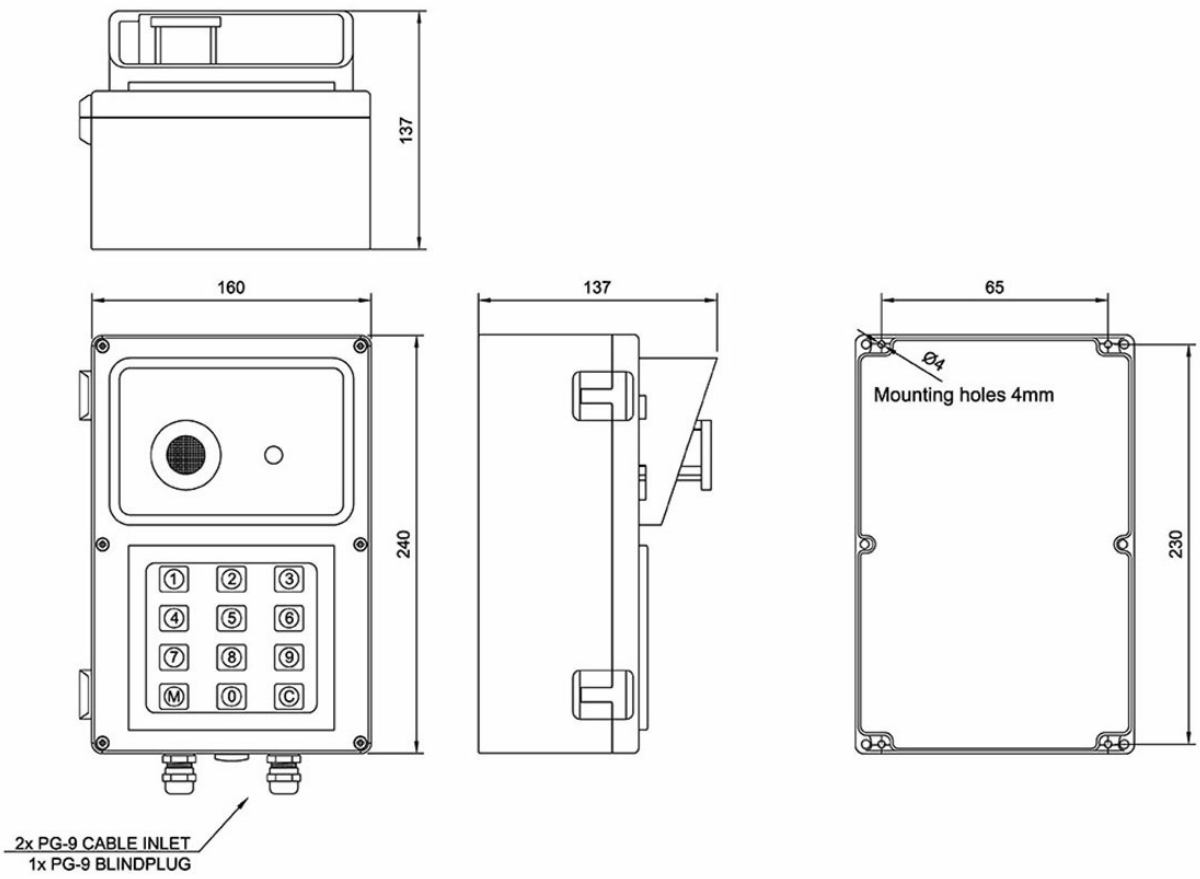






Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

# Spécifications

**MÉCANIQUE**

| | |
|---|---|
| Alimentation | Alimenté par le serveur sans amplificateur, 12 VAC / 2 Amp avec amplificateur |
| Câble requis | Câble 2 paires 0,5 mm2 / 24 AWG câble téléphonique torsadé + câble 1 paire 0,8 mm2 / 20 AWG (pour transformateur si l'amplificateur de puissance est utilisé) |
| températures de fonctionnement | De -50°C à +55°C |
| Humidité supportée | De 0% à 95% |
| Dimensions (LxHxP) | 160 x 240 x 137 mm |
| Finitions | Makrolon orange |
| Puissance maximale du haut-parleur externe | 1.5 W (20 Ohm), 10W (8 Ohm) avec amplificateur |
| Impédance du haut-parleur | 20-70 Ohm sans amplificateur, 8-20 Ohm avec amplificateur |





Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

| RÉFÉRENCE | DESCRIPTION | POIDS À L'EXPÉDITION |
|---|---|---|
| 1007082000 | Poste principal industriel anti-bruits de fond (nécessite un haut-parleur externe) | 1,1 kg |
| Accessoires : | | |
| VML-1520 | Haut-parleur, 15 W/20 Ohm, IP-66 | 1,4 kg |
| VMP-211 | Combiné fixation murale (avec touche PTT), IP-44 | 0,9 kg |
| VMP-250 | Combiné fixation murale (avec touche PTT), IP-65 | 0,9 kg |
| EOTRF 10115 | Transformateur 220 VAC/12 VAC (avec amplificateur de puissance) | 1,4 kg |

| GÉNÉRAL | |
|---|---|
| Fréquence | 500-5000 Hz (± 8 dB) |
| Impédance microphone pour combiné externe | 200 - 600 Ohm |
| Connecteur | Bornier à vis |
| Diamètre presse-étoupe | 2 x PG9 |
| Indicateur de service | LED rouge |

# Accessoires





Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.




## VMP-36-PEL

Casque audio avec microphone et câble 10 m

Référence Produit: 1020600750




## VMP-36-PELP

Casque avec microphone, câble de 10 mètres et prise

Référence Produit: 3006202029




## CD-7-VMP

Boîtier de raccordement waterproof pour VMP-36-PELP

Référence Produit: 3006202007




## VMP-211

Combiné mural

Référence Produit: 3006202024




## VMP-250

Combiné waterproof pour poste principal industriel, montage mural

Référence Produit: 1020600700



## VML-1520

Haut-parleur à chambre de compression 15W, 20 OHM, waterproof

Référence Produit: 3006100088




## EHS-24O – Rotary Signal Light, 24 V DC (Orange)

Rotary Light 24V DC

Référence Produit: 3006102041




## EHS-220O

Gyrophare orange 220 VAC

Référence Produit: 3006102036





Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.



## Model-A

Telephone Booth

Référence Produit:
3005000029



## IRR-3

Relay Box

Référence Produit:
1020600992



www.zenitel.com info@zenitel.com Last revision date: 2024-09-02 11:03

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.