zenitel

DATASHEET

1007080000

Poste principal industriel léger



Poste industriel

Description

- Poste principal résistant aux projections d'eau, entièrement équipé avec plein accès à l'ensemble des abonnés et des fonctionnalités Vingtor-Stentofon
- Boîtier en plastique ignifugé et résistant aux chocs, face avant et clavier en PVC avec protection UV, poste résistant aux liquides corrosifs
- Microphone électret et voyant rouge d'indication de mise en communication
- Raccordement des câbles sur bornier à vis
- Haut-parleur intégré et possibilité de connecter un haut-parleur externe, potentiomètre intgré pour régler le volume
- Amplificateur 10 W (8 Ohm) géré par VOX intégrépour une sortie amplifiée supplémentaire

Ce poste principal industriel léger résistant aux projections d'eau est adapté aux environnements humides, sales et poussiéreux. Son boîtier ignifugé et résistant aux chocs est fabriqué en plastique Bayblend®. La face avant, clavier inclus, est

www.zenitel.com info@zenitel.com Last revision date: 2024-04-19 09:06


Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

en PVC avec protection UV, une matière qui résiste à différents liquides corrosifs. Afin de faciliter l'installation et l'entretien du poste, la face avant peut être retirée. Ce modèle possède également un bornier à vis et les presse-étoupes permettent un raccordement des câbles étanche à l'eau et à la poussière.

La sensibilité du microphone électret s'ajuste automatiquement en fonction du niveau sonore d'entrée et garantit ainsi un signal sans distorsion sur le haut-parleur intégré de 45 Ohm. Le volume se règle grâce à un potentiomètre intégré au poste. Vous pouvez ajouter un haut-parleur externe de 20 à 70 Ohm connecté à la sortie non-amplifiée ou un haut-parleur de 8 à 20 Ohm connecté à la sortie amplifiée. L'amplificateur intégré nécessite une alimentation de 12 V AC/2A séparée. Le haut-parleur externe doit être placé à au moins 1 mètre du poste, lequel peut être programmé en mode Privé de manière permanente et auquel vous pouvez connecter un combiné.

Technical Dimensions

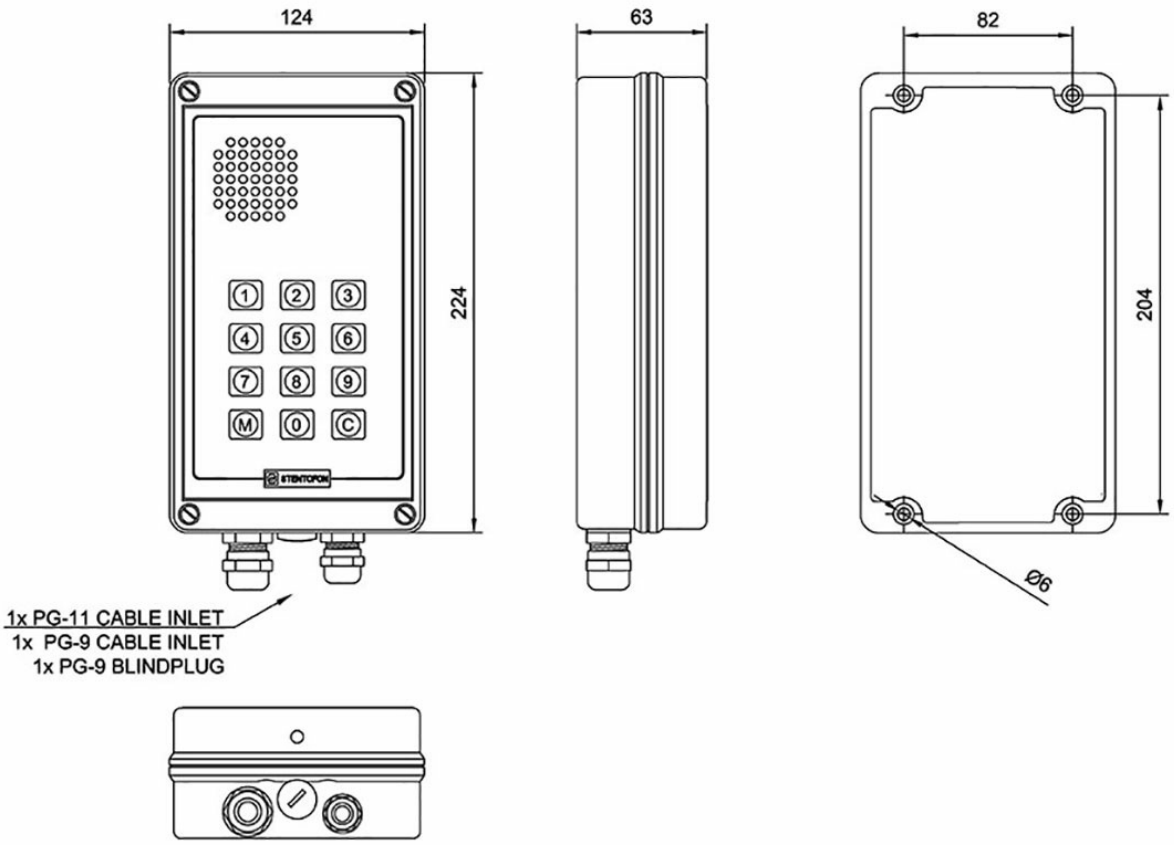

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Spécifications

MÉCANIQUE	
Référence	1007080000
Alimentation	Alimenté par le serveur sans amplificateur, 12V AC / 2 Amp avec amplificateur
Câble requis	Câble 2 paires 0,5 mm2 / 24 AWG câble de téléphone torsadé + câble 1 paire 0,8 mm2 / 20 AWG (pour transformateur si l'amplificateur de puissance est utilisé)
Températures de fonctionnement	De -40°C à +55°C
Humidité supportée	De 0% à 95%
Dimensions (LxHxP)	124 x 244 x 63 mm
Indice de Protection	IP-54

RÉFÉRENCE	DESCRIPTION	POIDS À L'EXPÉDITION
1007080000	Poste principal industriel léger	0,9 kg
Équipement supplémentaire :		
3006100088	VML-1520 Haut-parleur 20 ohm, 15 W	
EOTRF 10115	Transformateur 220V AC / 12 VAC (avec amplificateur de puissance)	1 kg

www.zenitel.com info@zenitel.com Last revision date: 2024-04-19 09:06

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

GÉNÉRAL

Finitions	Plastique Bayblend®, Clavier en PCV avec protection UV (résistant à : Alcool-Ethyl, White Spirit, Alkali, Acide de batterie, Méthanol, Acide chlorhydrique, Acide citrique, Antigel, Insecticides, Cola, Désinfectants, Huile de moteur, Détergents, etc.)
Pression acoustique à 1 m du haut-parleur intégré	66 dB (câble 0,5 mm x 100 m, 8,0 V sur la carte de ligne abonné, 1 kHz)
Puissance maximale du haut-parleur externe	1,5W (20 Ohm), 10W (8 Ohm) avec amplificateur
Impédance du haut-parleur	45 Ohm (haut-parleur intégré) / 20-70 Ohm haut-parleur externe (sans amplificateur) / 8-20 Ohm haut-parleur externe (avec amplificateur)
Fréquence	500-5000 Hz (± 8 dB)
Impédance microphone pour combiné	200 - 600 Ohm
Connecteur	Bornier à vis
Diamètre presse-étoupe	1 x PG9, 1 x PG11
Indicateur de service	LED rouge

Accessoires

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.



VMP-36-PEL-A

Headset with boom mic, headband, and 10m cable for VMP Station

Référence Produit: 1020600767



VMP-36-PEL-A/15

Headset with boom mic, headband, and 15m cable for VMP Station

Référence Produit: 1020600769



VMP-36-PEL-A/20

Headset with boom mic, headband, and 20m cable for VMP Station

Référence Produit: 1020600770



VMP-36-PELP-A

Headset with boom mic, headband, and 10m cable

Référence Produit: 1020600768



CD-7-VMP

Boîtier de raccordement waterproof pour VMP-36-PELP

Référence Produit: 3006202007



VMP-211

Combiné mural

Référence Produit: 3006202024



VMP-250

Combiné waterproof pour poste principal industriel, montage mural

Référence Produit: 1020600700



VML-1520

Haut-parleur à chambre de compression 15W, 20 OHM, waterproof

Référence Produit: 3006100088

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.



EHS-24O – Rotary Signal Light, 24 V DC (Orange)

Rotary Light 24V DC

Référence Produit:
3006102041



EHS-220O

Gyrophare orange 220 VAC

Référence Produit:
3006102036



Model-A

Telephone Booth

Référence Produit:
3005000029



IRR-3

Relay Box

Référence Produit:
1020600992

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.