zenitel

DATASHEET



2213000200

KNSP-01

Téléphone analogique industriel avec coffret

IP-66

Description

- Conçu pour la marine
- Clavier complet avec touches de fonctionnalités
- Le coffret comprend un mécanisme intelligent qui lui permet de rester ouvert ou fermé
- Excellente qualité audio
- Boutons fluorescents pour garantir une saisie correcte
- Maintien magnétique du combiné pour une usure minimale
- Alimenté par la ligne téléphonique

www.zenitel.com info@zenitel.com

Last revision date: 2024-12-06 16:43

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Le téléphone analogique résistant Vingtor-Stentofon est conçu pour supporter un usage intensif. Grâce à son boîtier en aluminium épais, ses composants en acier inoxydable, le câble en acier à l'intérieur du téléphone et son clavier fluorescent, il convient parfaitement à une utilisation en milieu maritime ou industriel tant qu'il est monté en intérieur. Avec son clavier complet et ses larges boutons, le téléphone est facile à utiliser. Les touches de fonctionnalités correspondent à :


- Bouton de rappel (REDIAL) : rappelez le dernier numéro
- Touche Enregistrer (STORE) : enregistrez un numéro en numéro abrégé
- Touche Choisir (PICK) : appuyez sur cette touche avant de choisir un numéro abrégé

Nous vous recommandons de vous munir d'une unité externe de notification d'appel par sonnerie (par exemple les unités HB-105 ou CRB-7). Une plaque de fixation murale en acier inoxydable est adaptée pour les installations ne nécessitant pas d'accès à l'arrière du téléphone. Cette plaque est inclus avec le téléphone.

Technical Dimensions

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

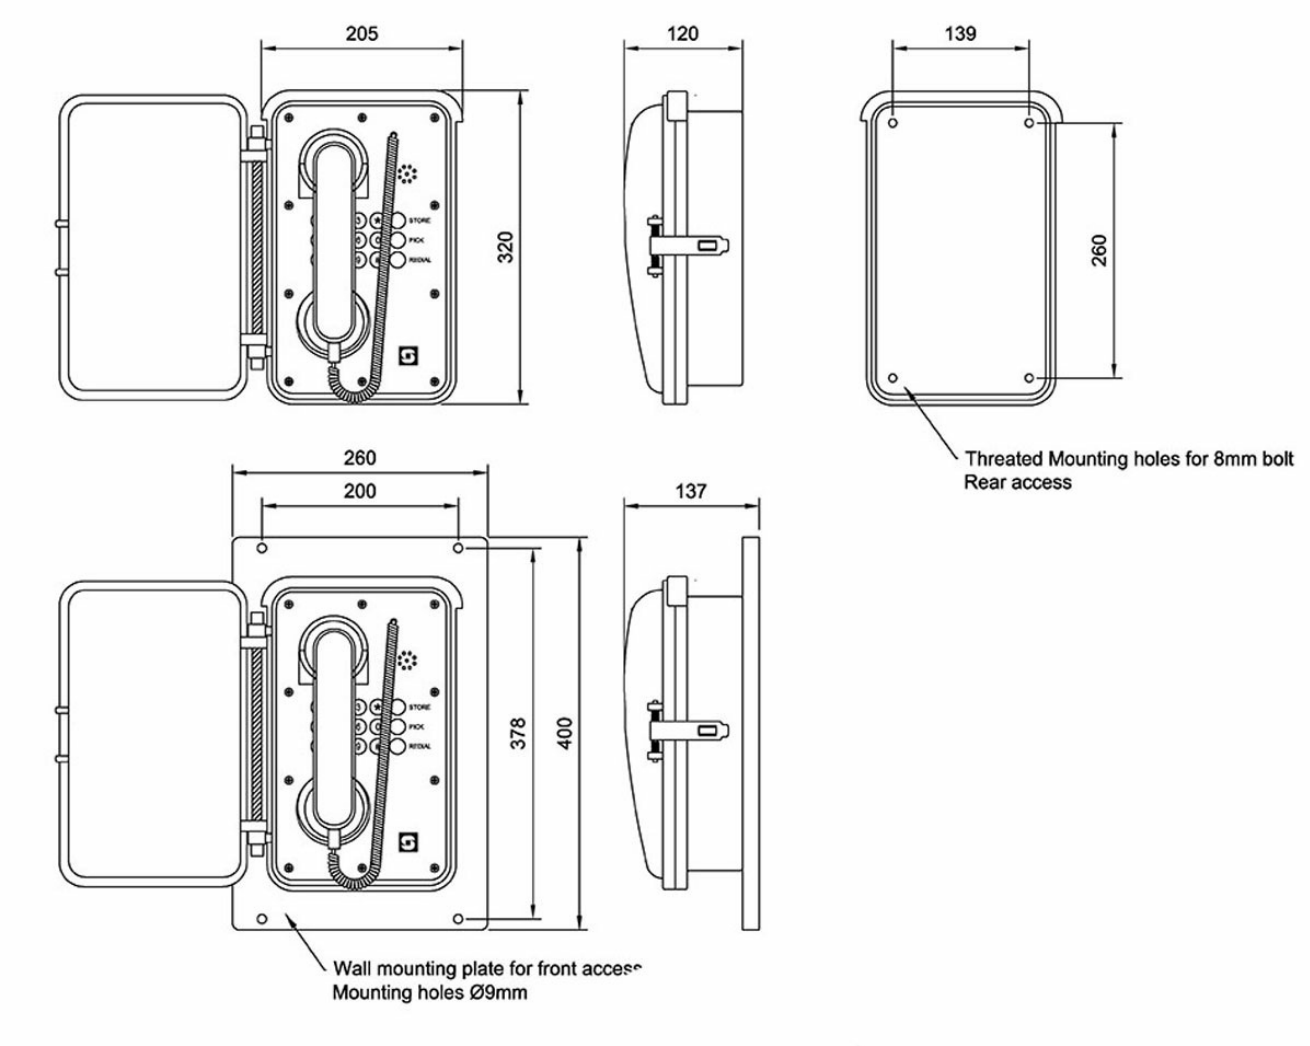

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Spécifications

GÉNÉRAL

Dimensions (LxHxP)	205 x 320 x 148 mm
Poids	5,0 kg
Montage	Applique
Températures de fonctionnement	De -30°C à 60°C
Humidité supportée	De 10% à 95% (relative)
Alimentation	48 – 69 VDC
Intensité de la sonnerie	> 70 dB
Matériaux	Boîtier en aluminium de 5 mm d'épaisseur et composants en acier inoxydable
Câble du téléphone	Acier inoxydable 60 cm depuis la partie basse du téléphone
Combiné	Puissance, résistance antidétonante
Câble du combiné	Câble spiralé 40 cm
Indice de Protection IP	IP-67
Boutons standard	12 boutons : 1-9, 0, *, #
Boutons de fonctionnalités	STORE (Enregistrer) : enregistrez jusqu'à 10 numéros abrégés (max. 16 chiffres). PICK (Choisir) : appuyez sur cette touche avant de sélectionner un chiffre pour composer un numéro abrégé. REDIAL (Rappel) : rappelez le dernier numéro composé

www.zenitel.com info@zenitel.com Last revision date: 2024-12-06 16:43

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Accessoires



JB-15T

Boîte de jonction

Référence Produit:
3006090476

www.zenitel.com info@zenitel.com Last revision date: 2024-12-06 16:43

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.