zenitel

DATASHEET

3005020055

SPS-4

Alimentation



Description

- Alimentation 115 / 230 VAC à 24 VDC avec relais à commutation automatique secteur / bloc d'alimentation et contact normalement ouvert / normalement fermé en cas de coupure de courant
- Boîtier compact en acier pour une fixation murale
- Borniers à vis pour les câbles
- Incroyable rendement : jusqu'à 95%
- Filtrage actif des entrées transitoires
- Larges condensateurs de sortie
- Contact de relais DC-OK


www.zenitel.com info@zenitel.com

Last revision date: 2024-05-24 15:11

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Technical Dimensions

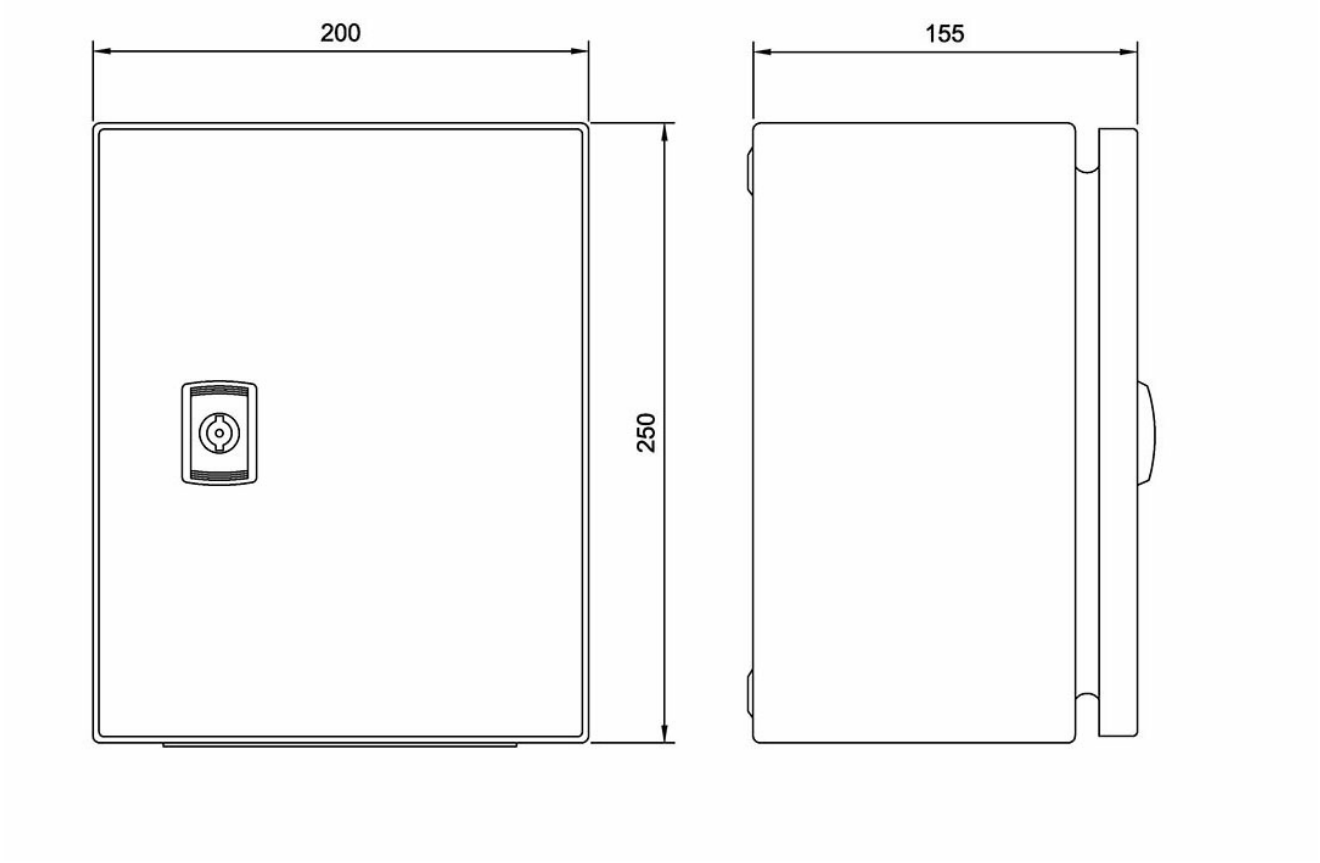

www.zenitel.com info@zenitel.com Last revision date: 2024-05-24 15:11

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Spécifications

GENERAL

Dimensions (LxHxP)	200 x 250 x 150 mm
Couleur	Gris RAL 7032
Poids	4,1 kg
Tension d'entrée 1	110 - 230 VAC
Tension d'entrée 2	24 VDC Urgence
Tension de sortie	24 V - 28 VDC
Courant de sortie	4,2 A
Puissance de sortie	110 W
Rippel & Noise volt.	50 mVpp
Relais	Pour la commutation automatique secteur / alimentation
Coupure de courant	Contacts normalement ouverts / normalement fermés
Températures de fonctionnement	De -25°C à +60°C
Indice de Protection IP	IP-44

www.zenitel.com info@zenitel.com Last revision date: 2024-05-24 15:11

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.