

3006206019

RS-3C


Amplifier Rack



Description

RS-3C Version 05 19" 3HU cabinet, prepared for amplifier VPA 120, VPA 240 and VPA 400. Terminals for external 230 VAC / 24 VDC, audio in + PTT and 100V audio out.

Technical Dimensions

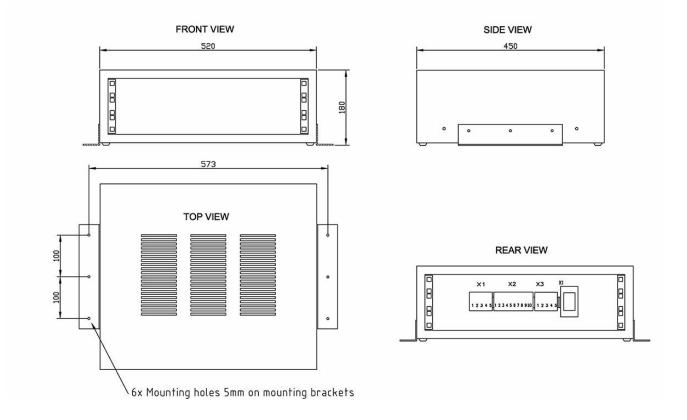

page 2/3

Specifications

GENERAL

Dimensions (WxHxD) 520 x 180 x 450 mm Mounting 6 x 5mm screws Weight Approx. 6 kg Housing Aluminium elox. Colour Black Cable entry Rear side Connections Screw terminals Operation voltage 24 VDC or 230 VAC Options: Power amplifers VPA 120/VPA 240 and VPA 400		
Weight Approx. 6 kg Housing Aluminium elox. Colour Black Cable entry Rear side Connections Screw terminals Operation voltage 24 VDC or 230 VAC Options: Power amplifers VPA 120/VPA See separate datasheet	Dimensions (WxHxD)	520 x 180 x 450 mm
Housing Aluminium elox. Colour Black Cable entry Rear side Connections Screw terminals Operation voltage 24 VDC or 230 VAC Options: Power amplifers VPA 120/VPA See separate datasheet	Mounting	6 x 5mm screws
Colour Black Cable entry Rear side Connections Screw terminals Operation voltage 24 VDC or 230 VAC Options: Power amplifers VPA 120/VPA See separate datasheet	Weight	Approx. 6 kg
Cable entry Rear side Connections Screw terminals Operation voltage 24 VDC or 230 VAC Options: Power amplifers VPA 120/VPA See separate datasheet	Housing	Aluminium elox.
Connections Screw terminals Operation voltage 24 VDC or 230 VAC Options: Power amplifers VPA 120/VPA See separate datasheet	Colour	Black
Operation voltage 24 VDC or 230 VAC Options: Power amplifers VPA 120/VPA See separate datasheet	Cable entry	Rear side
Options: Power amplifers VPA 120/VPA See separate datasheet	Connections	Screw terminals
amplifers VPA 120/VPA See separate datasheet	Operation voltage	24 VDC or 230 VAC
	amplifers VPA 120/VPA	See separate datasheet

Used With



Power Amplifier 120W Power Amplifier 240 W Power Amplifier 400 W