2340120009

SPA-REL-V3

Multipurpose potential free relay contact with fused outputs - function to be specified



Description


- Contact set rated at 24 VDC
- Rail mounting NS-35
- 2x contact set
- 24 VDC input coil
- Fused output

Technical Dimensions


www.zenitel.com info@zenitel.com Last revision date: 2023-10-12 11:06


Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.


ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

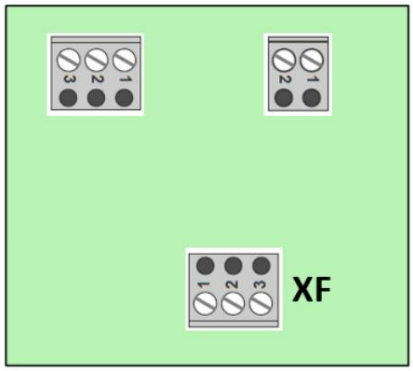

PRINCIPLE

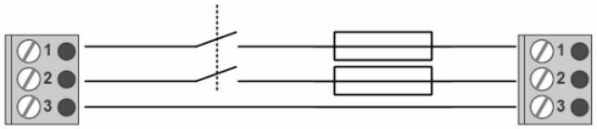





Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

GENERAL	
Dimension (WxH)	64 x 68 mm
Mounting	Rail mounting NS-35
Housing	ABS, PCB
Operation voltage (input coil)	24 VDC
Contact rating	24 VDC
Contact set	2 pcs. NO
Terminals	2.5 mm2
Fused output	Yes. 2A standard (Maximum 4A)
Weight	0.1 kg
Operating temperature	-15°C to +55°C
Environmental condition	Protected

CONNECTIONS	POSITION	DESCRIPTION
Input - Power Supply	1	+24VDC
	2	-24VDC
Input - Connections	1	NO1 - Normally open. Connects with Output pos.1 when activated.
	2	NO2 - Normally open. Connects with Output pos.2 when activated.
	3	Connection straight through to Output pos.3.
Output XF - Connections	1	NO1 - Normally open. Connects with Input pos.1 when activated.
	2	NO2 - Normally open. Connects with Input pos.1 when activated.
	3	Connection straight through to Input pos.3.

www.zenitel.com info@zenitel.com Last revision date: 2023-10-12 11:06

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.