

2340120009

## SPA-REL-V3

Multipurpose potential free relay contact with fused outputs - function to be specified




---


### Description

- ✓ Contact set rated at 24 VDC
- ✓ Rail mounting NS-35
- ✓ 2x contact set
- ✓ 24 VDC input coil
- ✓ Fused output

### Technical Dimensions

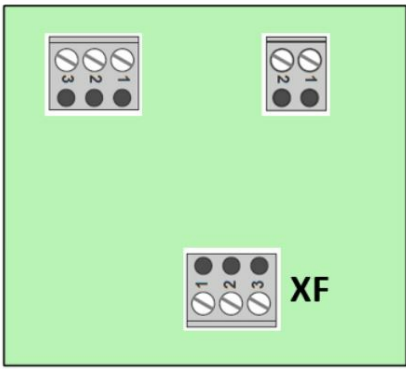


PRINCIPLE

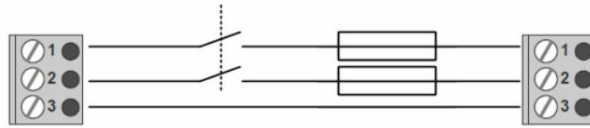

NO1 - NO  
NO2 - NO  
XF POS.3



+24VDC  
-24VDC



NO1 - NO  
NO2 - NO  
XF POS.3

# Specifications

## GENERAL

Dimension (WxH)	64 x 68 mm
Mounting	Rail mounting NS-35
Housing	ABS, PCB
Operation voltage (input coil)	24 VDC
Contact rating	24 VDC
Contact set	2 pcs. NO
Terminals	2.5 mm <sup>2</sup>
Fused output	Yes. 2A standard (Maximum 4A)
Weight	0.1 kg
Operating temperature	-15°C to +55°C
Environmental condition	Protected

CONNECTIONS	POSITION	DESCRIPTION
Input - Power Supply	1	+24VDC
	2	-24VDC
Input - Connections	1	NO1 - Normally open. Connects with Output pos.1 when activated.
	2	NO2 - Normally open. Connects with Output pos.2 when activated.
	3	Connection straight through to Output pos.3.
Output XF - Connections	1	NO1 - Normally open. Connects with Input pos.1 when activated.
	2	NO2 - Normally open. Connects with Input pos.1 when activated.
	3	Connection straight through to Input pos.3.