


2340120010

SPA-REL-V4


Multipurpose potential free relay contact with fused outputs - function to be specified

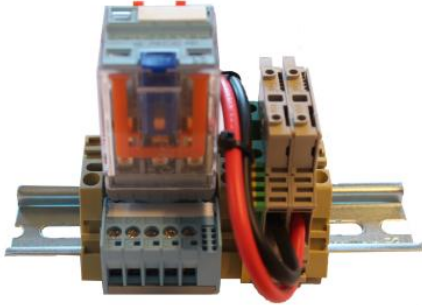


Description

- ✓ Contact set rated at 115-230 VAC or 24 VDC
- ✓ Rail mounting NS-35
- ✓ 2x contact set
- ✓ 24 VDC input coil
- ✓ Fused output

Technical Dimensions

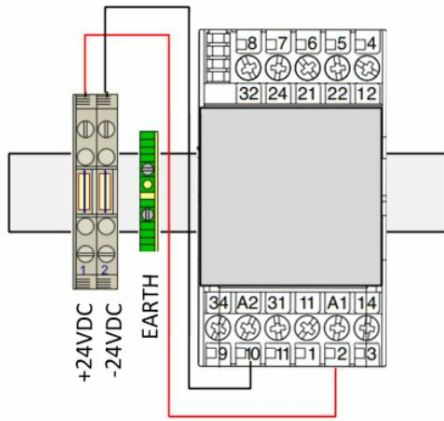

CONNECTION DIAGRAM

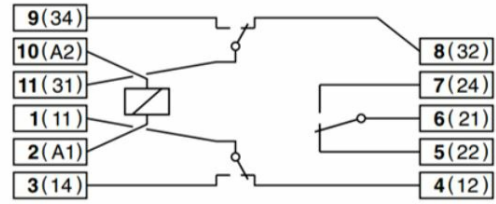

Specifications

GENERAL

| | |
|--------------------------------|-----------------------|
| Dimension (WxH) | 80 x 70 mm |
| Mounting | Rail mounting NS-35 |
| Housing | ABS, PC |
| Operation voltage (input coil) | 24 VDC |
| Contact rating | 115-230 VAC or 24 VDC |
| Contact set | 2 pcs. C/NO |
| Terminals | 2.5 mm ² |
| Fused output | Yes. 5A |
| Weight | 0.2 kg |
| Operating temperature | -15°C to +55°C |
| Environmental condition | Protected |