
2340120010

SPA-REL-V4

Multipurpose potential free relay contact with fused outputs - function to be specified

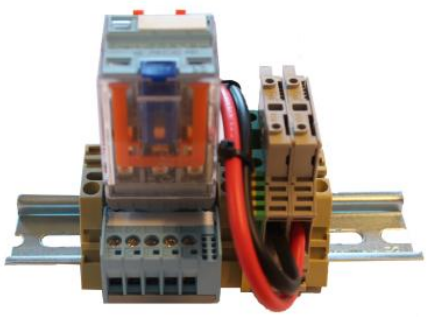

Description


- Contact set rated at 115-230 VAC or 24 VDC
- Rail mounting NS-35
- 2x contact set
- 24 VDC input coil
- Fused output

Technical Dimensions


www.zenitel.com info@zenitel.com Last revision date: 2023-10-12 11:08

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

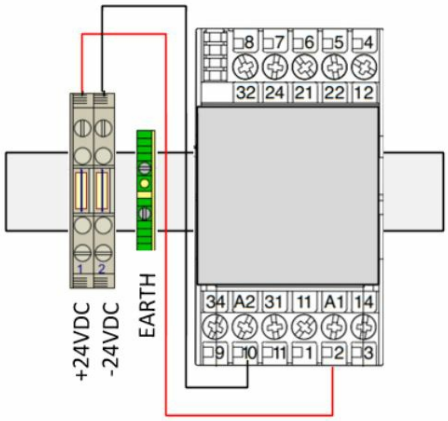

CONNECTION DIAGRAM

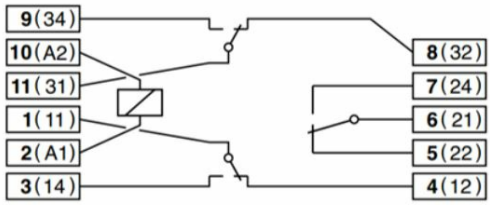

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

GENERAL	
Dimension (WxH)	80 x 70 mm
Mounting	Rail mounting NS-35
Housing	ABS, PC
Operation voltage (input coil)	24 VDC
Contact rating	115-230 VAC or 24 VDC
Contact set	2 pcs. C/NO
Terminals	2.5 mm2
Fused output	Yes. 5A
Weight	0.2 kg
Operating temperature	-15°C to +55°C
Environmental condition	Protected

www.zenitel.com info@zenitel.com Last revision date: 2023-10-12 11:08

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.