3005010161

SPA-M6S-V2

PA Panel Single w/6 zones

REPLACED BY

2340110020 - SPA-M6-V2


Description

- PA-panel for single system
- Delivered with gooseneck microphone
- Built-in pre-amplifier with preset signal level and tone controls
- 6 zone selection buttons
- ALL, TALK and dimmer buttons. Talk button on panel
- Replaceable text label to each zone button
- Zone buttons have activation confirmation light
- Flush mounting, back box for wall mounting is available
- Local mute contact for external loudspeaker (From hardware version 4.0)

This Vingtor-Stentofon Panel gives messages in one to six zones in a SPA-V2 public address and general alarm single system. Installation in consoles or on-wall indoor.

Local mute function is used to break audio to loudspeakers where proximity to pa panel cause feedback. Available from hardware version 4.0. This function must be in combination with relay box

Technical Dimensions

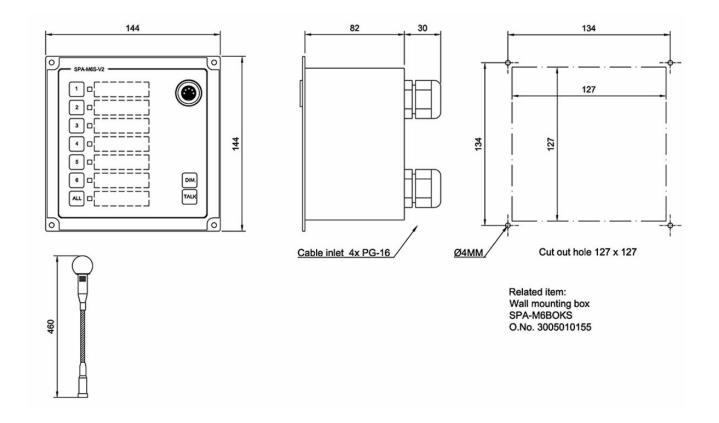

Specifications

GENERAL

Size (WxHxD)	144 x 144 x 82
Weight w/microphone	0. 6 kg
Material	Black anodized aluminium
Mounting	Flush, wall with use of back box
Output signal	0.775mV 0dB
Sensivity microphone	2K / 4mV
Connections	Plugable screw terminals for 2.5 mm2 cable
Cable glands	4 x PG-16
Cable size	6 x 2 x 0.75 mm2
Local mute relay, output	24V DC @ maximum 50mA
IP-rating	IP-44

Accessories





SPA-M6BOKS

IRR-3

Wall-mount box for SPA-M1/M6 and VM15/50-RD panels Relay Box

page 3/3