zenitel

DATASHEET

3005000038

SMIII-PA

PA telephone interface (Trunk-line needed per PA-line)



Description

- Trunk input / Audio output
- Rail mounting NS-35
- 24 VDC input
- For connection to telephone exchanges


Technical Dimensions

www.zenitel.com info@zenitel.com

Last revision date: 2023-10-11 13:54

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

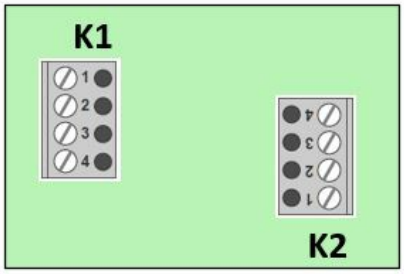

INPUT

1	+24VDC
2	-24VDC
3	A-LINE
4	B-LINE

K1

OUTPUT

1	AUDIO OUT
2	AUDIO OUT
3	SWITCH
4	SWITCH

K2

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

GENERAL	
Dimension (WxH)	45 x 70 mm
Mounting	Rail mounting NS-35
Housing	ABS, PCB
Operation voltage	24 VDC
Terminals	2.5 mm2
Weight	0.1 kg
Environmental Condition	Protected

TERMINAL	POSITION	DESCRIPTION
INPUT K1	1	+ 24VDC
	2	- 24 VDC
	3	A - LINE
	4	B - LINE
OUTPUT K2	1	AUDIO OUT
	2	AUDIO OUT
	3	SWITCH
	4	SWITCH

www.zenitel.com info@zenitel.com Last revision date: 2023-10-11 13:54

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.