

2340110021

## SPA-M6-D

REPLACED BY: [SPA-M6-D](#)  
[Zenitel](#)

Onboard communication




## Description

This Vingtor-Stentofon Panel gives messages in one to six zones in a SPA-V2 public address and general alarm dual system. Installation in consoles or on-wall indoor.

Local mute function is used to break audio to loudspeakers where proximity to pa panel cause feedback. This function must be in combination with relay box.

Note: Microphone must be ordered separately.

## Technical Dimensions

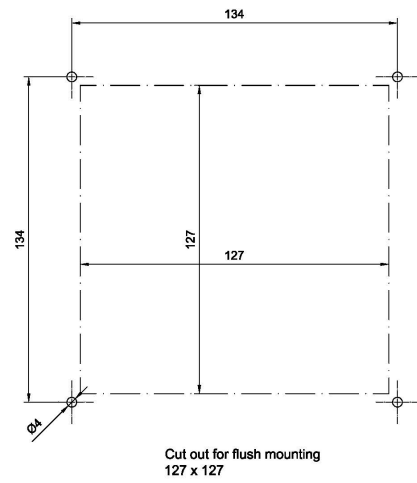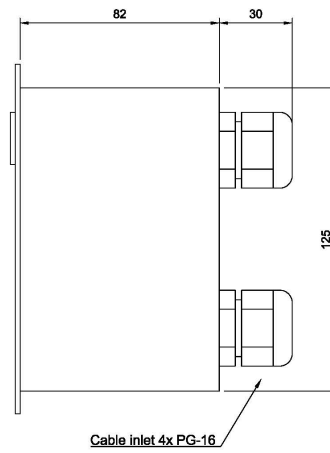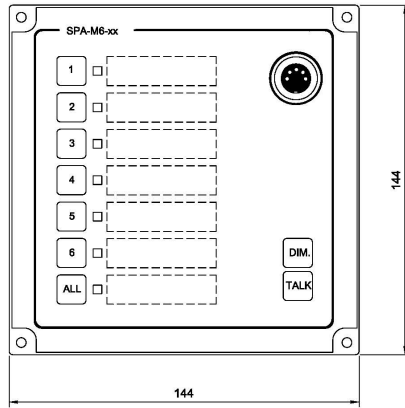

Cable inlet 4x PG-16

Cut out for flush mounting  
127 x 127


Related Item:  
 SPA-M6BOKS Wall mounting box for SPA-M1/M6 panels Item.no. 3005010155  
 MB-30G Gooseneck Microphone Item.no.3005020033  
 ETC-1-TB Hand Microphone Item.no.3005020029

# Specifications

## GENERAL

Size (WxHxD)	144 x 144 x 82 mm
Weight w/microphone	0.6 kg
Material	Black anodized aluminium
Mounting	Flush, wall with use of back box
Output signal	0.775Vrms / 0dB
Connections	Plugable screw terminals for 2.5 mm <sup>2</sup> cable
Cable glands	4 x PG-16
Cable size	6 x 2 x 0.75 mm <sup>2</sup>
Local mute relay, output	24V DC @ maximum 50mA
IP-rating	IP-44
Operating temperature	-15°C to +55°C
Environmental Condition	Protected

## Accessories



SPA-M6BOKS

Wall-mount box for SPA-M1/M6 and VM15/50-RD panels



MB-30G

Gooseneck Microphone



ETC-1-TB

Hand Microphone



PAM2H

Handheld Microphone for SPA-V2 indoor panels.