


2340110019 SPA-M1-D

REPLACED BY: SPA-M1-D





Description

- PA Panel for dual system , all call
- O Built-in pre-amplifier with preset signal level and tone controls
- TALK button on panel
- Flush mounting, back box for wall mounting is available
- Local mute contact for external loudspeaker

This panel gives All Call Message in a SPA-V2 public address and general alarm dual system.

Local mute function is used to break audio to loudspeakers where proximity to pa panel cause feedback. This function must be in combination with relay box.

page 1/4


www.zenitel.com


info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

Note: Microphone must be ordered separately.

Technical Dimensions



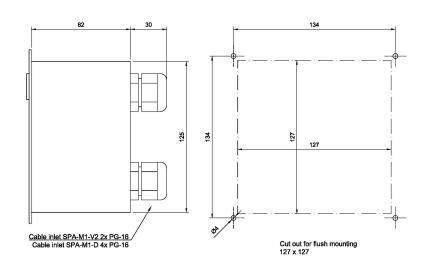

Related item: SPA-M6BOKS Wall mounting box for SPA-M1/M6 panels Item.no. 3005010155 MB-30G Gooseneck Microphone Item.no.3005020033 ETC-1-TB Hand Microphone Item.no.3005020029

page 2/4

www.zenitel.com

info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

Specifications

GENERAL

Size (WxHxD)	144 x 144 x 82 mm
Weight w/microphone	0. 5 kg
Material	Black anodized aluminium
Mounting	Flush, wall with use of back box
Output signal	0.775Vrms / 0dB
Connections	Plugable screw terminals for 2.5 mm2 cable
Cable glands	4 x PG-16
Cable size	6 x 2 x 0.75mm2
Local mute relay, output	24V DC @ maximum 50 mA
IP-rating	IP-44
Operating temperature	-15°C to +55°C
Environmental Condition	Protected

Accessories

page 3/4

www.zenitel.com

info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.







SPA-M6BOKS

Wall-mount box for SPA-M1/M6 and VM15/50-RD panels MB-30G

Gooseneck Microphone

ETC-1-TB

Hand Microphone



Handheld Microphone for SPA-V2 indoor panels.

www.zenitel.com

info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.