


1008113020

## TCIA-2

Analog over IP Intercom

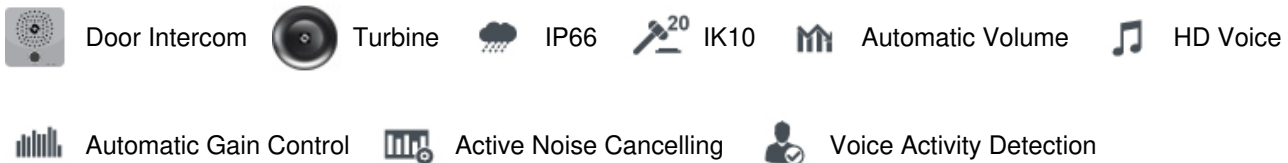


## Description

- ✓ Vandal resistant Analog over IP intercom
- ✓ Combine the network security of an analog intercom with the audio features of an IP intercom.
- ✓ Up to 60 meters extended analog interface keeps your IP network port in protected area.
- ✓ Background noise cancellation
- ✓ Dirt, dust and water resistant - rating IP-66
- ✓ Built to last with robust die-cast aluminum frame - rating IK10







- ✓ Stainless steel front plate with one button
- ✓ Ideal for Building Security and Public Environments where you don't want to expose your physical IP network.

Zenitel's Air Gap Solution:

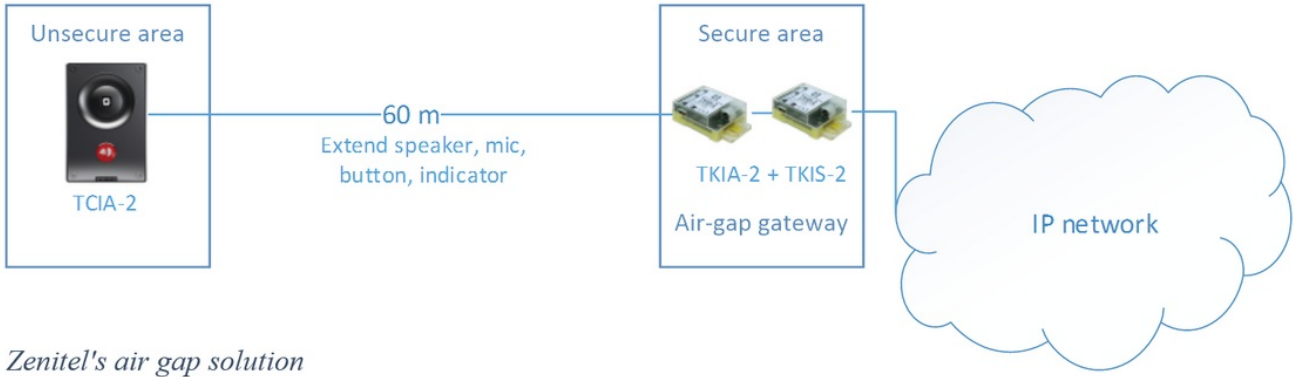

*Zenitel's air gap solution*

## Technical Dimensions

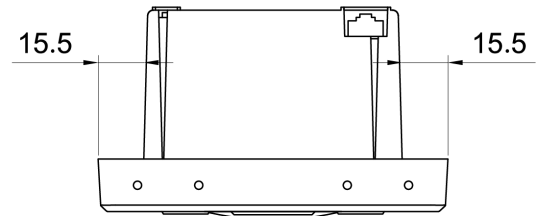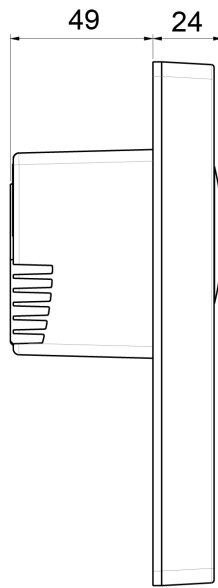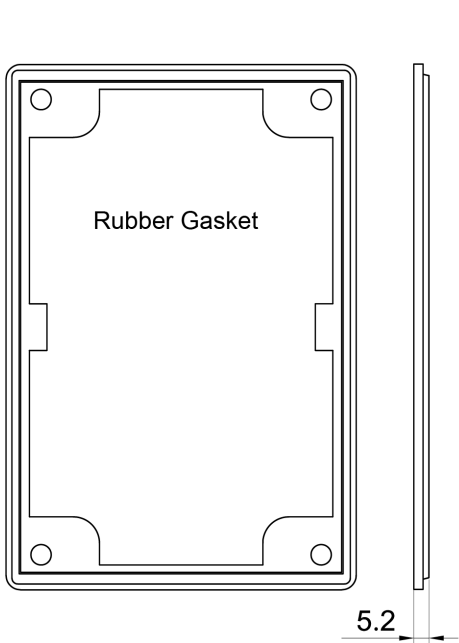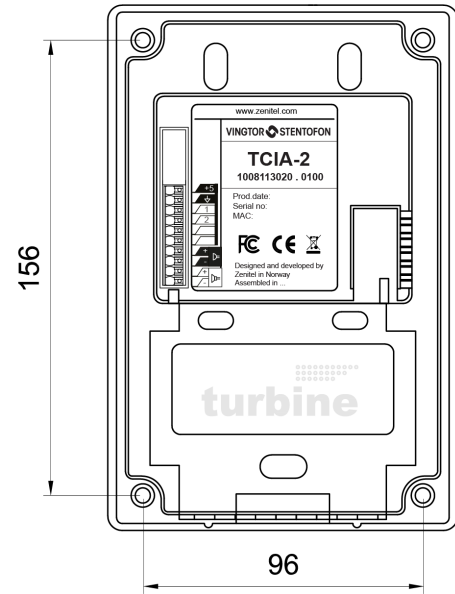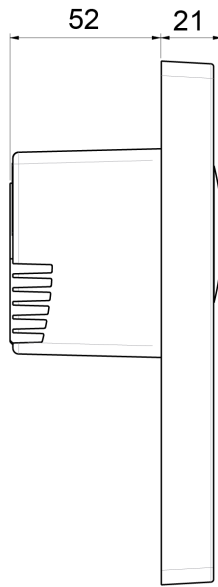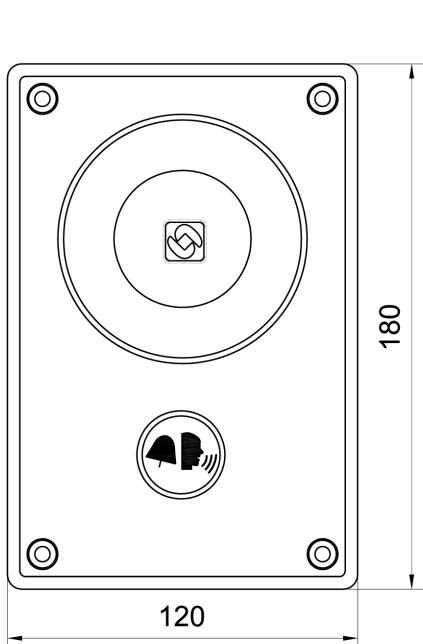

All dimensions in mm

# Specifications

## AUDIO

---

Loudspeaker impedance	8 ohm
Microphone technology	Analog MEMS, omni directional microphone

---

## HARDWARE

---

Connector	1 x RJ45
Power	Powered from gateway
Call indication	LED integrated in large button

---

## CONSTRUCTION

Dimensions (HxWxD)	180 x 120 x 73 mm / 7.1" x 4.7" x 2.9"
Dimensions after flush mount	180 x 120 x 24 mm / 7.1" x 4.7" x 0.9"
Dimensions with on wall box	180 x 120 x 86 mm / 7.1" x 4.7" x 3.4"
Weight	1 kg / 2.2 lbs.
Faceplate material	3 mm / 0.12" stainless steel - AISI 403
Base/frame material	3 mm / 0.12" aluminum alloy - A413.0, AISi12Se, anodized and painted
Electronics cover material	Polycarbonate (translucent)
Gasket material	Silicone rubber
Fastening bracket material	SECC steel
Button material	3 mm / 0.12" Polycarbonate (transparent)
Button travel length	1.25 mm
Button activation force	350 gf
Button push-cycles before failure	300 000
Loudspeaker poke protection, large diameter object	3D cast aluminum speaker grille
Loudspeaker poke protection, small diameter objects	Stainless steel mesh, acoustically transparent

## ENVIRONMENT AND COMPLIANCES

IP rating	IP-66, tested according to EN 60529 (applies when mounted in TA-1 back box)
IK rating	IK 10, tested according to EN 62262
Operating temperature range	-40° to 70° C / -40° to 158 ° F
Storage temperature range	-40° to 70° C / -40° to 158 ° F
Relative humidity	< 95% not condensing
Corrosion	Salty mist. tested according to EN60945
Vibration	Tested according to EN60945
UV-resistant	Yes
EMC	CE and FCC Part 15

## OTHER SPECIFICATIONS

Country of manufacture	Poland
------------------------	--------

## Accessories



TA-1

Turbine Compact Onwall Back Box

Item Number: 1008140010



TA-2

US 2-Gang 3 1/2" Deep Backbox

Item Number: 1008140020



TA-5

Bracket for US 2 GANG Double Depth Back Box

Item Number: 1008140050



TA-18

Turbine Compact Flush-Mount Back Box

Item Number: 1008140180



TA-14

Microphone windshield for  
TCIS / TCIV

Item Number: 1008140140

Used With



TKIS-2 Audio Intercom  
Kit

VoIP Intercom Module

Item Number: 1008131020



TKIA-2

Analog over IP Gateway

Item Number: 1008133020



TCIA-2-P

Package with TCIA-2,TKIA-  
2,TKIS-2

Item Number: 1008113120