

1008133020

TKIA-2





Analog over IP Gateway



Description

- ✓ Extends the analog interface on TKIS-2 up to 60 meters.
- ✓ Keeps your IP network port in protected area.
- ✓ Uses a standard CAT5 or CAT6 Ethernet cable to connect to TCIA-2 Analog over IP intercom.
- ✓ Combines the network security of an analog intercom with the audio features of an IP intercom.
- ✓ Includes cable for connection to TKIS-2
- ✓ Used together with TKIS-2 and TCIA-2

Technical Dimensions

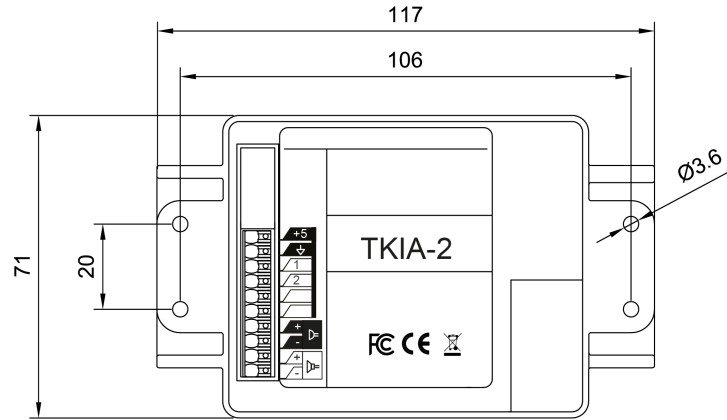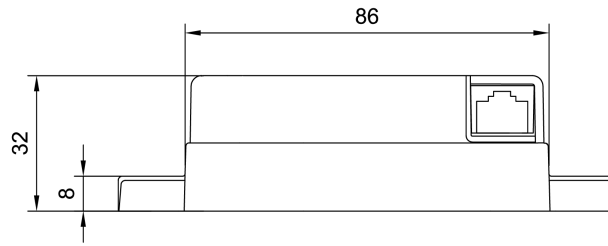

All dimensions in mm

Specifications

HARDWARE

Connection to TCIA-2	1 x RJ45
Connection to TKIS-2	Tool-less, spring-loaded, vibration-proof terminals.

OTHER SPECIFICATIONS

Dimensions (HxWxD)	71 x 86 x 32 mm
Weight	0.1 kg / 0.2 lbs
Encapsulation material	ASA plastic
DIN-rail clips	Wago 209 (included)
Warranty	2 Years standard warranty, extendible up to total of 5 years (additional fee)

ENVIRONMENT AND COMPLIANCES

Operating temperature range	-40° to 70° C / -40° to 158 ° F
Storage temperature range	-40° to 70° C / -40° to 158 ° F
Relative humidity	< 95% not condensing
EMC	CE and FCC Part 15

Used With



TKIS-2 Audio Intercom
Kit

VoIP Intercom Module



TCIA-2

Analog over IP Intercom



TCIA-2-P

Package with TCIA-2,TKIA-
2,TKIS-2