

1008133020

## TKIA-2

Analog over IP Gateway







---

---

## Description

- ✓ Extends the analog interface on TKIS-2 up to 60 meters.
- ✓ Keeps your IP network port in protected area.
- ✓ Uses a standard CAT5 or CAT6 Ethernet cable to connect to TCIA-2 Analog over IP intercom.
- ✓ Combines the network security of an analog intercom with the audio features of an IP intercom.
- ✓ Includes cable for connection to TKIS-2
- ✓ Used together with TKIS-2 and TCIA-2

## Technical Dimensions

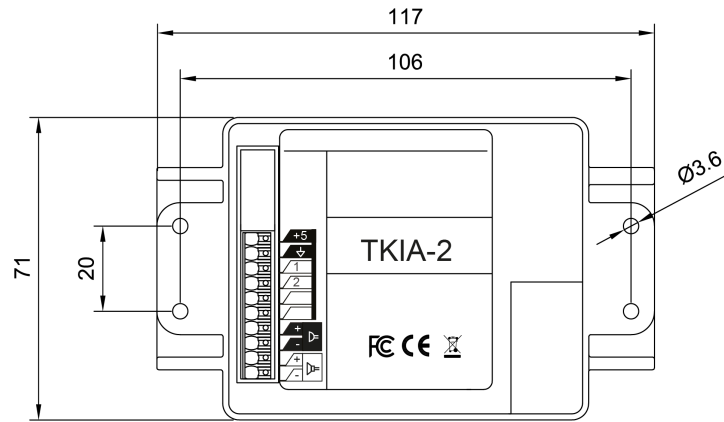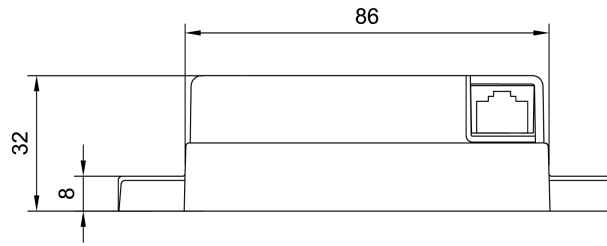

All dimensions in mm

# Specifications

## HARDWARE

|                      |  |
|----------------------|--|
| Connection to TCIA-2 | 1 x RJ45   |
| Connection to TKIS-2 | Tool-less, spring-loaded, vibration-proof terminals. |

## OTHER SPECIFICATIONS

|                        |   |
|------------------------|---|
| Dimensions (HxWxD)     | 71 x 86 x 32 mm   |
| Weight                 | 0.1 kg / 0.2 lbs  |
| Encapsulation material | ASA plastic   |
| DIN-rail clips         | Wago 209 (included)   |
| Warranty               | 2 Years standard warranty, extendible up to total of 5 years (additional fee) |

## ENVIRONMENT AND COMPLIANCES

|                             |                                 |
|-----------------------------|---------------------------------|
| Operating temperature range | -40° to 70° C / -40° to 158 ° F |
| Storage temperature range   | -40° to 70° C / -40° to 158 ° F |
| Relative humidity           | < 95% not condensing            |
| EMC                         | CE and FCC Part 15              |

## Used With



TKIS-2 Audio Intercom Kit

VoIP Intercom Module



TCIA-2

Analog over IP Intercom



TCIA-2-P

Package with TCIA-2,TKIA-2,TKIS-2