

2131000132

## CL-135T

5" Miniature ceiling speaker, 100V, 6W



---

---


### Description

5" miniature speaker for small rooms or where space for mounting speakers is limited.


The speaker has a robust, yet discreet design and installation is easy with two spring clamps.

### Technical Dimensions

Item:2131000141 (with steel fire dome)

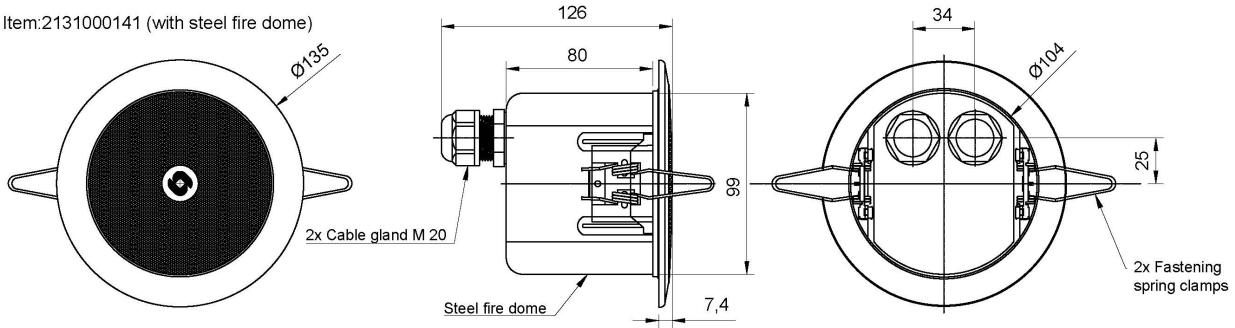

Item:2131000132 (without steel fire dome)

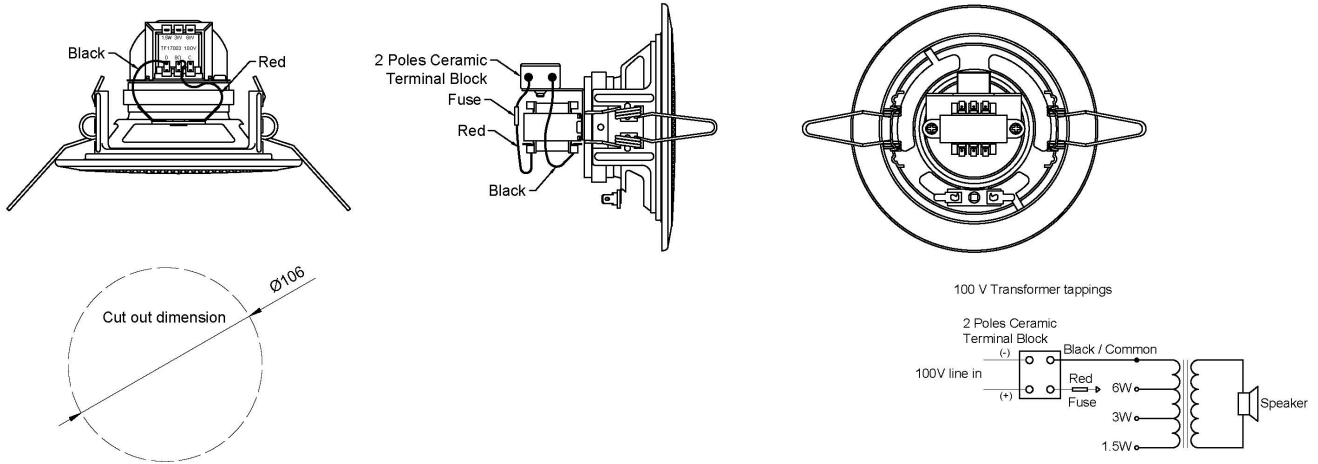

# Specifications

## GENERAL

Dimensions (Diameter x Depth)	Ø135 x D82mm
Cut Out Dimension (Dia.)	Ø106
Mounting	Flush mounted – ceiling or wall by spring clamp
Operating temperature range	-20 ~ + 70
Rated Power	6W
Max Power	10W
Sensitivity	80 dB ± 3dB , 1W/1M at 400,500,600,700 Hz- Avg.
Frequency Range	75 Hz ~ 18 KHz -10dB / ±20% Hz
Rated Voltage	100 V
Power tapings	6-3-1.5W
Termination	Ceramic Terminal Block With thermal fuse
Baffle Material	Steel , RAL 9010
Mesh Grille	Steel , RAL 9010
Weight	0,52 kg
Environmental Condition	Protected

## PRODUCT VARIANTS

2131000141	CL-135T-W/FD 5" Ceiling miniature speaker, 100V, 6W w/fire dome
------------	--------------------------------------------------------------------