

2131000137

BSWT-6T

On-wall speaker, 100V, IP65, 6W

- *Please note that this product has been replaced by Item Number: 2131000151*

Description

- Made for marine environment
- Good audio quality
- Corrosion-free plastic enclosure
- Cable entry in the bottom or from the back
- An integrated gasket enables watertight mounting without cable glands when using the rear cable entry
- Adjustable power tapping to accommodate separate room sizes
- Supports loop wiring with double cable entries
- Includes thermal fuse, ceramic terminals and transformer for 100V lines

The Vingtor-Stentofon on-wall watertight speaker BSWT-6T is made for demanding environments. The speaker is well suited for marine usage with water ingress protection from all sides.


Using both cable entries facilitates loop-wiring and reduces the need for costly junction boxes.

Please note that this product has been replaced by Item Number: 2131000151

Technical Dimensions

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

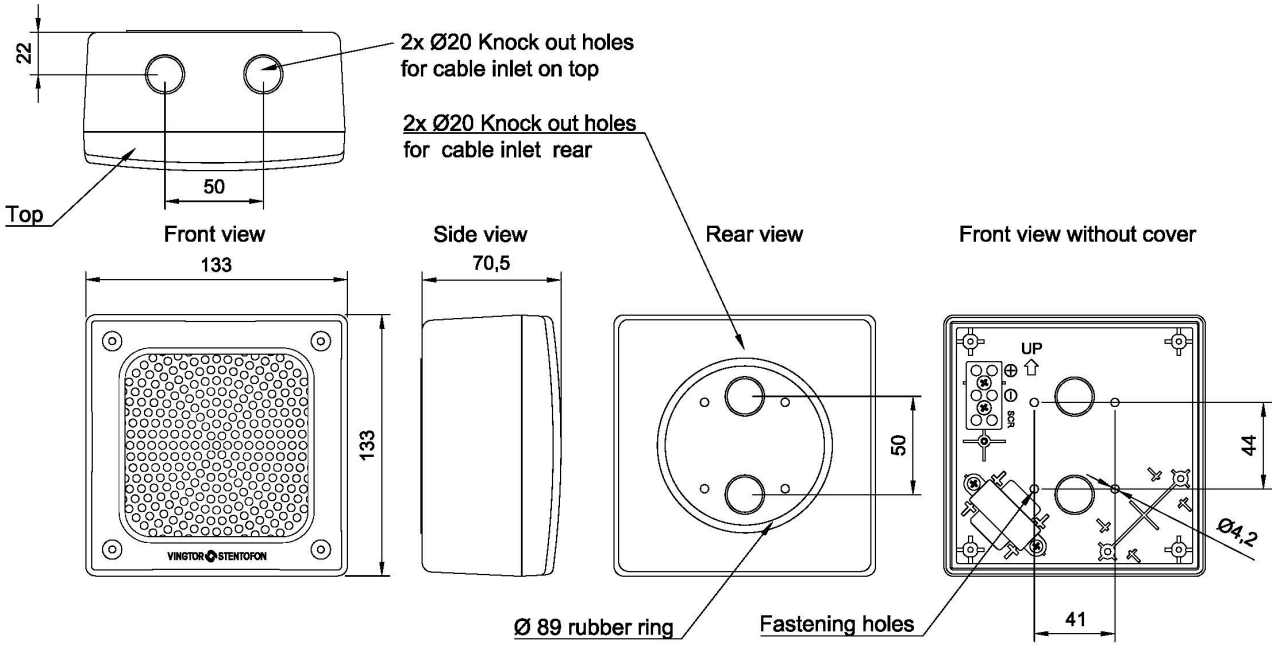

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

GENERAL

Dimensions (HxWxD)	133 x 133 x 70,5 mm
Woofer size	3"
Mounting	Screw Mount
IP rating	IP65
Operating temperature range	-20 ~ + 70
Rated Power	6W
Max Power	10W
Power tappings	6-3-1.5W
Sensitivity SPL 1W / 1m	89dB
Sensitivity Max SPL, 1m	97dB
Rated Voltage	100V
Frequency range	150 ~ 16 KHZ
Termination	Ceramic Terminal Block With thermal fuse
Color	White RAL 9010
Weight	0.68 kg
Environmental Condition	Protected

www.zenitel.com info@zenitel.com Last revision date: 2026-03-23 14:21

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.