

2211000620

IP DECT Base Station

IP Base Station for KWS6500




Description

The IP DECT Base station has the following key features:

- ✓ Certified for use under Marine EMC requirements
- ✓ Fast and easy installation
- ✓ Powered from the PoE enabled LAN network or from external power supply (not included)
- ✓ 12 simultaneous traffic channels (32 Kbit/s)
- ✓ Interoperates with all Spectralink DECT Servers
- ✓ Connect an external antenna to extend the coverage
- ✓ Base station radio coverage between 20 and 200 m

Technical Dimensions

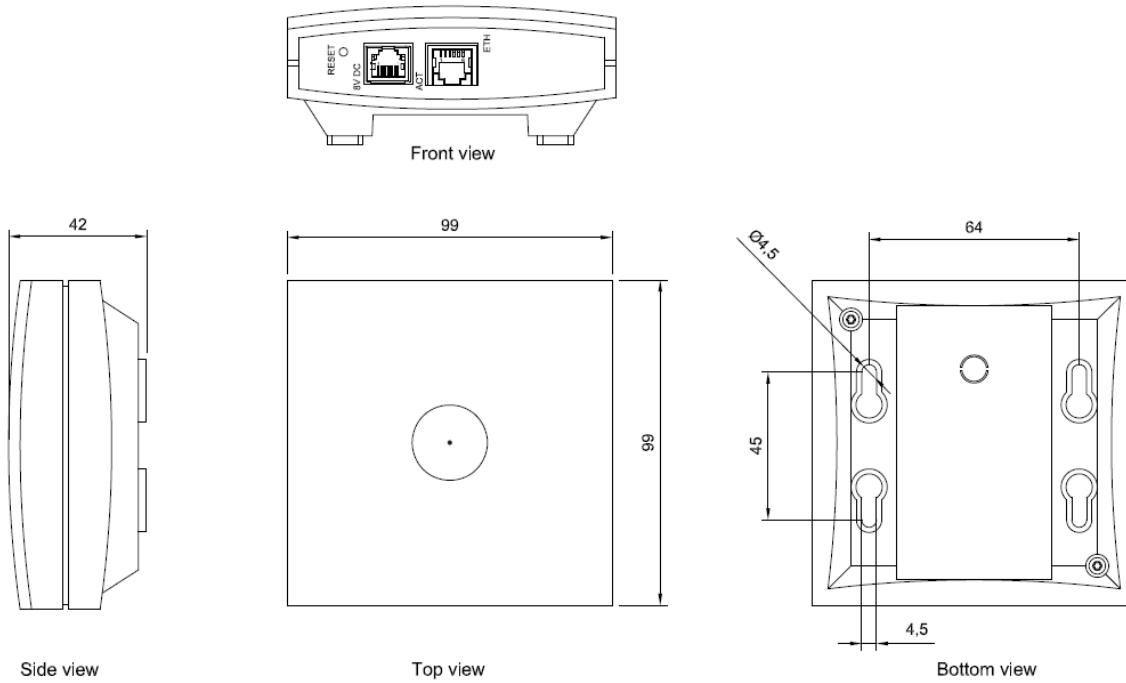

Specifications

GENERAL

| | |
|---------------------------|--|
| Size | 100 x 100 x 38 mm |
| Weight | 0.12 kg |
| Operating temperature | -10 to 40°C |
| Power supply | PoE or optional external power supply (item no 2211100225) |
| Typical power consumption | 2W |
| Number of speech channels | 12 |
| RF Output | 20 to 24 dBm at antenna connection |
| Typical range | Indoor: 20-50 m, Outdoor: up to 300 m |
| Frequency Range | EMEA 1880-1900 MHz |

PRODUCT VARIANTS

| | |
|------------|--|
| 2211000630 | IP DECT base PoE for KWS6x00 with 100m leaking cable |
|------------|--|

ACCESSORIES

| | |
|------------|--|
| 2211100225 | Local power supply for IP DECT 400 server and IP DECT base station |
|------------|--|

Used With



KWS6500

IP DECT Server for 30
users, including software
licence