

2340200021

HB-105-2

Telephone Tonecaller, 60-100V AC, 105 dBA, watertight, IP66



- ✓ Telephone line powered (no mains voltage required).
- ✓ Penetrating typical 105dBA output.
- ✓ Volume Control.
- ✓ Reduced installation costs.
- ✓ Available for hard wiring (using either screw or I.D.C connections) or supplied with a 3 metre line cord and a 431A plug.
- ✓ Weatherproofing to IP 66.
- ✓ REN of 0.75.
- ✓ Maintenance free operation.
- ✓ 2 selectable tones.


 IP66

Description

The line powered 105dBA HB-105-2 Tonecaller is a telephone extension sounder which has been designed for installation in large areas which have high ambient noise levels so that a ringing telephone can easily be heard. The unit is rated to IP66 and is suitable for operation in adverse conditions.

The HB-105-2 Tonecaller is designed to replace traditional mains powered bells, and is powered by the PABX and PSTN line voltage (60 – 100 volts AC). A variable output of 85 – 105 dBA is obtained by means of a potentiometer located within the unit.

Technical Dimensions

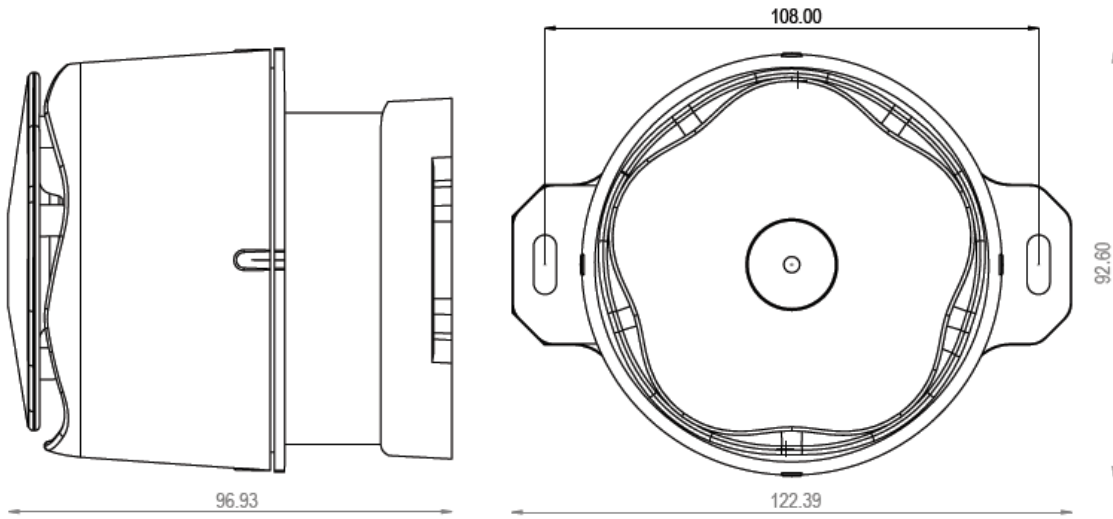

Specifications

GENERAL

Colour	Yellow Case with a black base and black fixing bracket.
Dimensions (Ø x H)	92 x 97mm
Mounting	2x 5mm screw
Weight	0.350 kg
Input Voltage	60 – 100 volts AC.
Output SPL	85 – 105dBA nominal at 1 metre.
Volume control	Via a variable potentiometer
Buzz Tone	Very fast sweep 120Hz between 2.3KHz to 2.9Hz
Continuous Tone	2.6KHz
Waterproofing	IP 66
Environmental Condition	Exposed