
zenitel

DATASHEET

3005010045

MI-2

Multipurpose Microphone Preamplifier

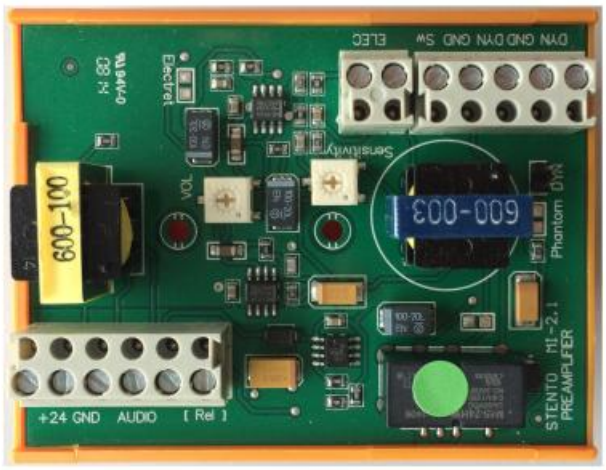

Description

- Preamplifier for microphone
- Electret or dynamic microphone selectable
- Potentiometer for adjustable volume and sensitivity
- 24 VDC
- Contact set rated at 230 VAC or 24 VDC
- Rail mounting NS-35

www.zenitel.com info@zenitel.com

Last revision date: 2023-10-11 13:41

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

GENERAL

Dimension (WxH)	45 x 70 mm
Mounting	Rail mounting NS-35
Housing	ABS, PCB
Operation voltage	24 VDC / power consumption max. 0,65 W
Contact rating	230 VAC or 24 VDC
Contact set	1 pcs. C/NO
Terminals	2.5 mm2
Weight	0.2 kg
Operating temperature	-15°C to +55°C
Environmental Condition	Protected

INPUT / OUTPUT LEVELS

Input	2 mV
Output	0 dB

www.zenitel.com info@zenitel.com Last revision date: 2023-10-11 13:41

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

CONNECTIONS

Terminal	Position	Description
Input	1	Dynamic microphone
	2	Ground / Shield
	3	Dynamic microphone
	4	Ground
	5	Switch in / PTT
Terminal	Position	Description
Input	1	Electret microphone
	2	Electret microphone
Terminal	Position	Description
Input	1	+24 VDC
	2	Ground
Output	3	Audio out
	4	Audio out
	5	Relay
	6	Relay

www.zenitel.com info@zenitel.com Last revision date: 2023-10-11 13:41

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.