zenitel

DATASHEET



2310120201

CE-NVR-16/4POE

Network video recorder, 16 ch. 16 PoE ports w/o HDD

- H.265+/H.265/H.264+/H.264 video formats
- 16-channel Network Video Recorder
- Built-in 16 port PoE switch enables a simple and cost-effective installation
- Up to 160/256 Mbps incoming bandwidth
- Slots for 4 HDDs

Description

The CE-NVR-16/4PoE Network Video Recorder (NVR) offers the following features:

Professional and Reliability

- H.265+ compression effectively reduces the storage space by up to 75%
- Dual-stream recording saves bandwidth
- Adopt stream over TLS encryption technology which provides more secure stream transmission service
- Support double verification for playback and downloading

HD Video Output

- Provide independent HDMI and VGA outputs
- HDMI video output at up to 4K resolution

Storage and Playback

- Up to 4 SATA interfaces for HDD connection
- 16-ch synchronous playback

Smart POS Function

- Support multiple VCA (Video Content Analytics) events
- Configurable special camera smart functions, such as VCA detection (motion, line crossing, intrusion, etc.), heat map, ANPR, andpeople counting
- POS information overlay on live view and playback, and POS triggered recording and alarm

www.zenitel.com info@zenitel.com

Last revision date: 2026-03-05 13:24

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Network Ethernet Access

- 16 independent PoE network interfaces
- 1 self-adaptive 10/100/1000 Mbps Ethernet interface
- Hik-Connect DDNS (Dynamic Domain Name System) for easy network management
- Smooth streaming technology
- Support web access without plug-in

Various Applications


- Centralized management of IP cameras, including configuration, information import/export, real-time information display, two-way audio, upgrade, etc.
- Connectable to smart IP cameras from VINGTOR - STENTOFON with recording, playback, and backing up of VCA alarms
- VCA detection alarm is supported
- Instant playback for assigned channel during multi-channel display mode
- Smart search for the selected area in the video; and smart playback toimprove the playback efficiency
- Supports HDD quota and group modes; different capacity can be assigned to different channels

Technical Dimensions

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Dimension

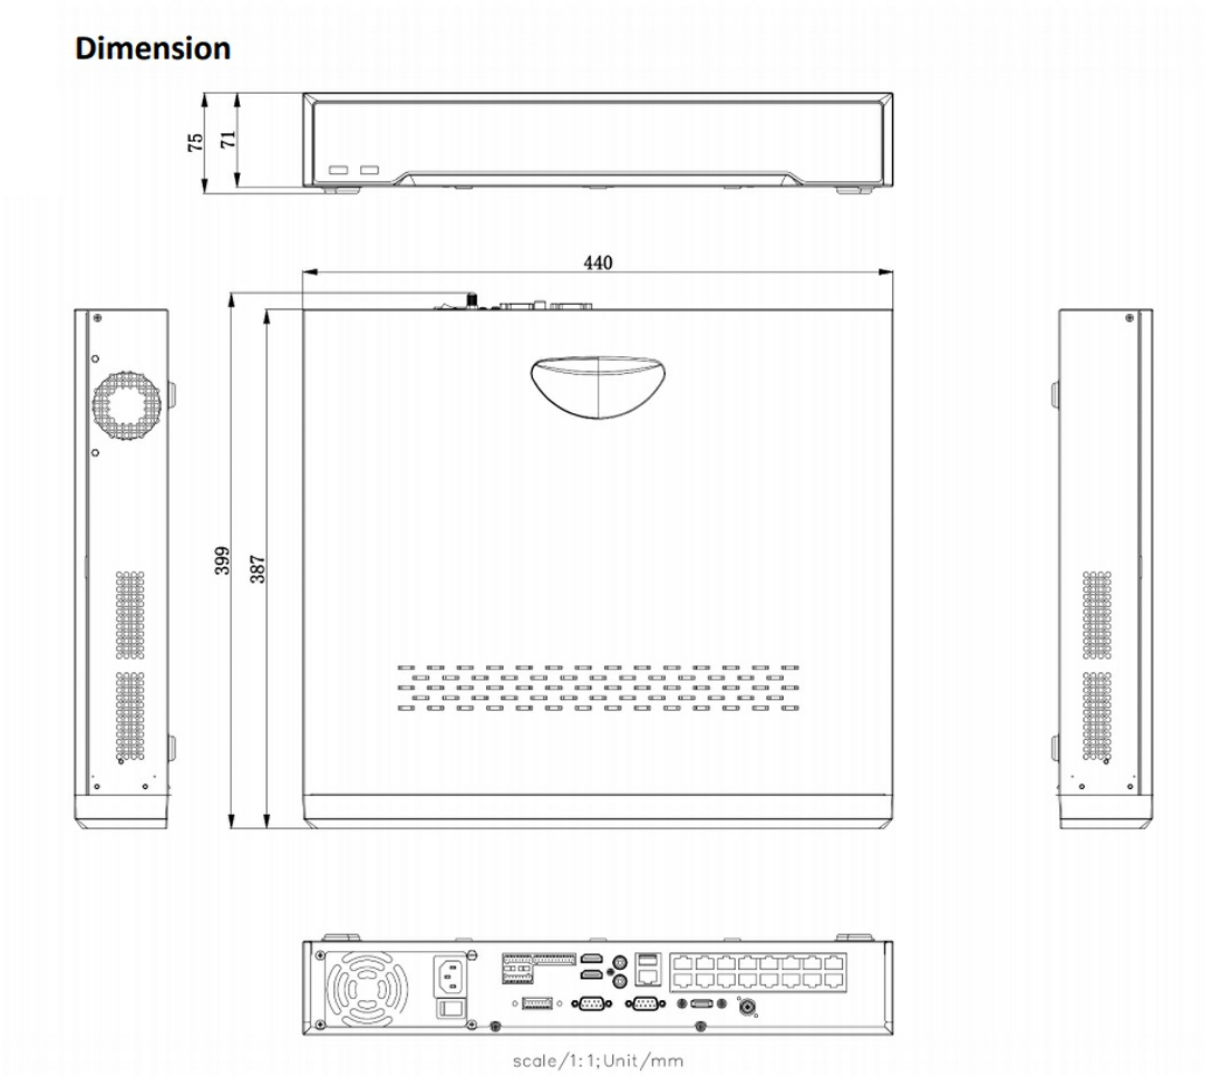

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

VIDEO / AUDIO INPUT	
IP video input:	16-ch, Up to 12 MP resolution
Two-way audio input:	1-ch, RCA (2.0 Vp-p, 1kΩ)

NETWORK	
Incoming bandwidth	160Mbps
Outgoing bandwidth	256 Mbps
Remote connection	128

VIDEO / AUDIO OUTPUT	
Recording resolution	12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/ 4CIF/DCIF/ 2CIF/CIF/QCIF
HDMI output resolution	4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
VGA output resolution	1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
Audio output	1-ch, RCA (Linear, 1 KΩ)

DECODING	
Decoding format	H.265/H.264/MPEG4
Live view / Playback resolution	12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/ 4CIF/DCIF/ 2CIF/CIF/QCIF
Synchronous playback	16-ch
Capability	4-ch @ 4K, or 16-ch @ 1080p

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

HARD DISC

SATA	4 SATA interfaces for 4HDDs
eSATA (optional)	1 eSATA interface
Capacity	Up to 8TB capacity for each HDD

EXTERNAL INTERFACE

Network Interface:	1 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
Serial Interface:	1 RS-485 (half-duplex), 1 RS-232
USB interface	Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0
Alarm in/out	16/4

POE INTERFACE (FOR /P NVR ONLY)

Interface	16 RJ-45 10/100 Mbps self-adaptive Ethernet interfaces
Power	≤200W
Supported standard	IEEE 802.3 af/at

GENERAL

Power supply	100 to 240 VAC
Power	≤300 W
Consumption (without hard disk)	≤20 W (without enabling PoE)
Working temperature	-10 to +55ºC (14 to 131ºF)
Working humidity	10 to 90 %
Chassis	19-inch rack-mounted 1.5U chassis
Dimensions(W × D × H)	445 × 390 ×70 mm (17.5"× 15.3" × 2.8")
Weight(without hard disk)	≤ 5 Kg (11 lb)

Accessories

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.



DS-1005KI

USB joystick and keyboard

Item Number: 2310120101



CE-NVR-WD20PURZ HDD 2TB

2TB, 3,5" SATA 24/7 HDD Drive

Item Number: 2310120062



CE-NVR-WD40PURZ HDD 4TB

4TB, 3,5" SATA 24/7 HDD Drive

Item Number: 2310120063



CE-NVR-WD80PURZ HDD 8TB

8TB, 3,5" SATA 24/7 HDD Drive

Item Number: 2310120065

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.