

3006102003

## A-100AC

Electronic Alarm 24-260VAC or 60-260VDC



- ✓ Automatic synchronization on multi-sounder system
- ✓ Low in-rush
- ✓ Continuously rated
- ✓ Stainless steel fixings
- ✓ Tropicalised electronics
- ✓ Duplicate cable terminations (in & out for daisy-chain installations)
- ✓ 64 alarm tones
- ✓ To be wall-mounted in noisy areas like engine room etc.

 IP66


## Description

The A100 is a compact, high-output, 110dB(A) alarm sounder. Low current consumption and high SPL in a robust fire retardant housing ensure the A100 is suitable for all general signaling applications including fire, security, and process control.


## Technical Dimensions

□

FRONT VIEW

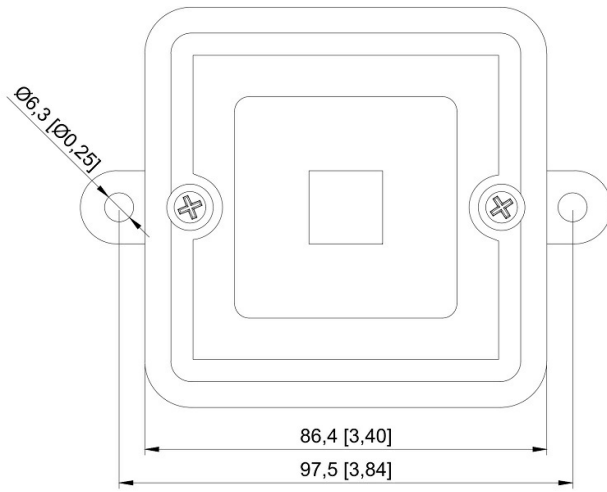

SIDE VIEW

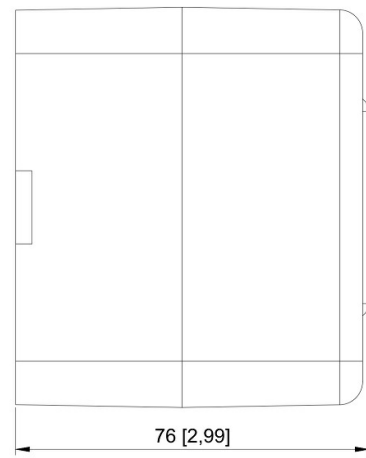

# Specifications

## GENERAL

Voltage	24-260V ac 50/60Hz / 60-260Vdc
Rated current	25mA @115VAC, 17mA @230VAC
Housing	High impact UL94 V0 & 5VA FR ABS
IP-class	IP66 Type 3R/13
Dimensions (mm)	86x77mm
Weight	0.26 kg
Operating temp	-40 to +66°C [-40° to +151°F]
Humidity	95% at 20°C [68°F]
Terminals	0.5 – 2.5mm <sup>2</sup> (20-14 AWG)
Cable entries	Dual M20 or 1/2"NPT clearance cable entries
Environmental Condition	Exposed