zenitel

DATASHEET



3006102003

A-100AC

Electronic Alarm 24-260VAC or 60-260VDC

- Automatic synchronization on multi-sounder system
- Low in-rush
- Continuously rated
- Stainless steel fixings
- Tropicalised electronics
- Duplicate cable terminations (in & out for daisy-chain installations)
- 64 alarm tones
- To be wall-mounted in noisy areas like engine room etc.

IP66

Description

The A100 is a compact, high-output, 110dB(A) alarm sounder. Low current consumption and high SPL in a robust fire retardant housing ensure the A100 is suitable for all general signaling applications including fire, security, and process control.

Technical Dimensions


www.zenitel.com info@zenitel.com

Last revision date: 2024-10-28 12:29


Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

FRONT VIEW

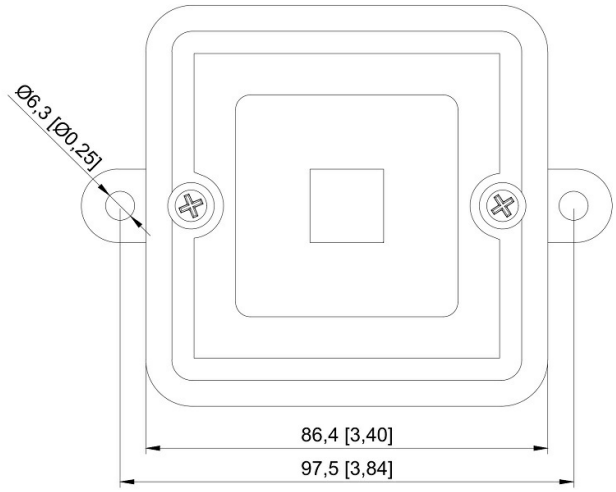

SIDE VIEW

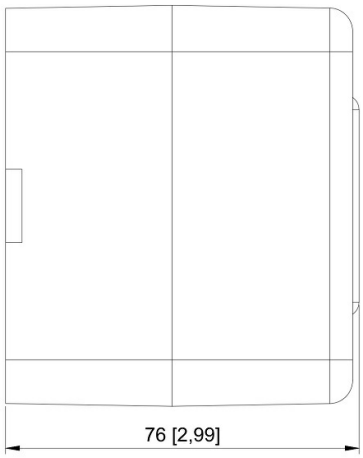

www.zenitel.com info@zenitel.com Last revision date: 2024-10-28 12:29

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

GENERAL	
Voltage	24-260V ac 50/60Hz / 60-260Vdc
Rated current	25mA @115VAC, 17mA @230VAC
Housing	High impact UL94 V0 & 5VA FR ABS
IP-class	IP66 Type 3R/13
Dimensions (mm)	86x77mm
Weight	0.26 kg
Operating temp	-40 to +66°C [-40° to +151°F]
Humidity	95% at 20°C [68°F]
Terminals	0.5 – 2.5mm² (20-14 AWG)
Cable entries	Dual M20 or 1/2"NPT clearance cable entries
Environmental Condition	Exposed

www.zenitel.com info@zenitel.com Last revision date: 2024-10-28 12:29

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.