



2340220009

## L-101-115Y

Xenon Strobes 115VAC, IP66, Yellow

Also available in other colors:

- ✓ 2340220007 : L-101-115R Xenon Strobe, 115V AC, IP-66 Red
- ✓ 2340220008 : L-101-115A Xenon Strobe, 115V AC, IP-66 Amber
- ✓ 2340220009 : L-101-115Y Xenon Strobe, 115V AC, IP-66 Yellow
- ✓ 2340220010 : L-101-115G Xenon Strobe, 115V AC, IP-66 Green
- ✓ 2340220011 : L-101-115B Xenon Strobe, 115V AC, IP-66 Blue
- ✓ 2340220012 : L-101-115C Xenon Strobe, 115V AC , IP -66 Clear



 IP66

## Description

- ✓ Pluggable terminals.
- ✓ In and out terminals.
- ✓ Multiple, user selectable flash rates.
- ✓ User replaceable Xenon tube lamp.
- ✓ Can be stacked to create multi-signal units.

The L-101-115Y is a compact, robust 5 Joule Xenon strobe beacon ideal for all general signalling applications including fire, security and process control. Features an automatically synchronised flash rate of 1Hz (60 flashes per minute).

## Technical Dimensions

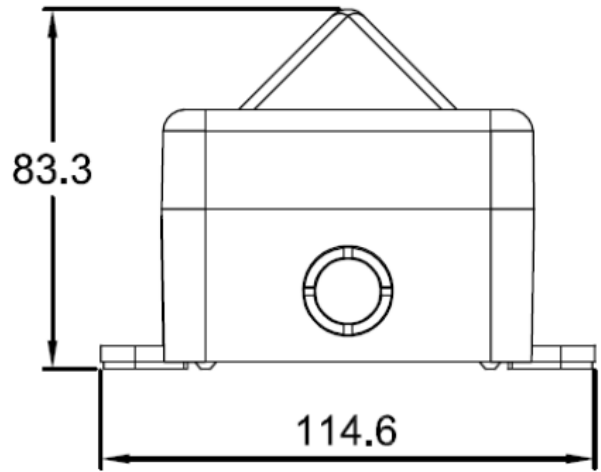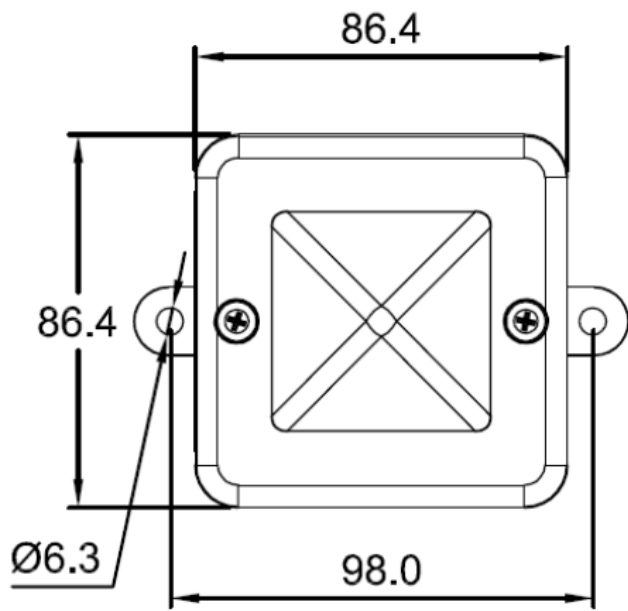

# Specifications

## GENERAL

Dimension (HxWxD) (mm)	86 x 86 x 83
Weight	0.20 kg
Energy	5 Joules (5Ws)
Flash rate	1Hz
Terminals	0.5 to 4 mm <sup>2</sup> cables
Lens Colours	Red, Amber, Yellow, Green, Blue, Clear
Tube life	70% after 8000000 flashes
IP	IP-66
Operative temperature	-25 °C to +55 °C
Relative humidity	90% at 20 °C

## VERSION:

115 VAC 50/60 Hz

## VOLTAGE RANGE:

+/-10%

## CURRENT MA:

70 mA

## ITEM NUMBER

## DESCRIPTION

2340220007	L-101-115R Xenon Strobe, 115V AC, IP-66 Red
2340220008	L-101-115A Xenon Strobe, 115V AC, IP-66 Amber
2340220009	L-101-115Y Xenon Strobe, 115V AC, IP-66 Yellow
2340220010	L-101-115G Xenon Strobe, 115V AC, IP-66 Green
2340220011	L-101-115B Xenon Strobe, 115V AC, IP-66 Blue
2340220012	L-101-115C Xenon Strobe, 115V AC , IP -66 Clear

## ACCESSORIES

9021903001	Spare Lens for Beacon L101, Green
------------	--------------------------------------