

2990000065

Power Supply 100-240VAC/48VDC 2A

Switched-mode power supply, 1-phase, 48 VDC output voltage, 2A current


- Model: Wago 787-1623
- Switched-mode power supply
- Natural convection cooling when horizontally mounted
- Enclosed for use in switchgear cabinets
- Bounce-free switching signal (DC O K)
- Suitable for both parallel and series operation
- Electrically isolated output voltage (SELV) per EN 60950-1/UL 60950-1; PELV per EN 60204
- DNV approval

Technical Dimensions

www.zenitel.com info@zenitel.com Last revision date: 2026-05-15 09:46

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

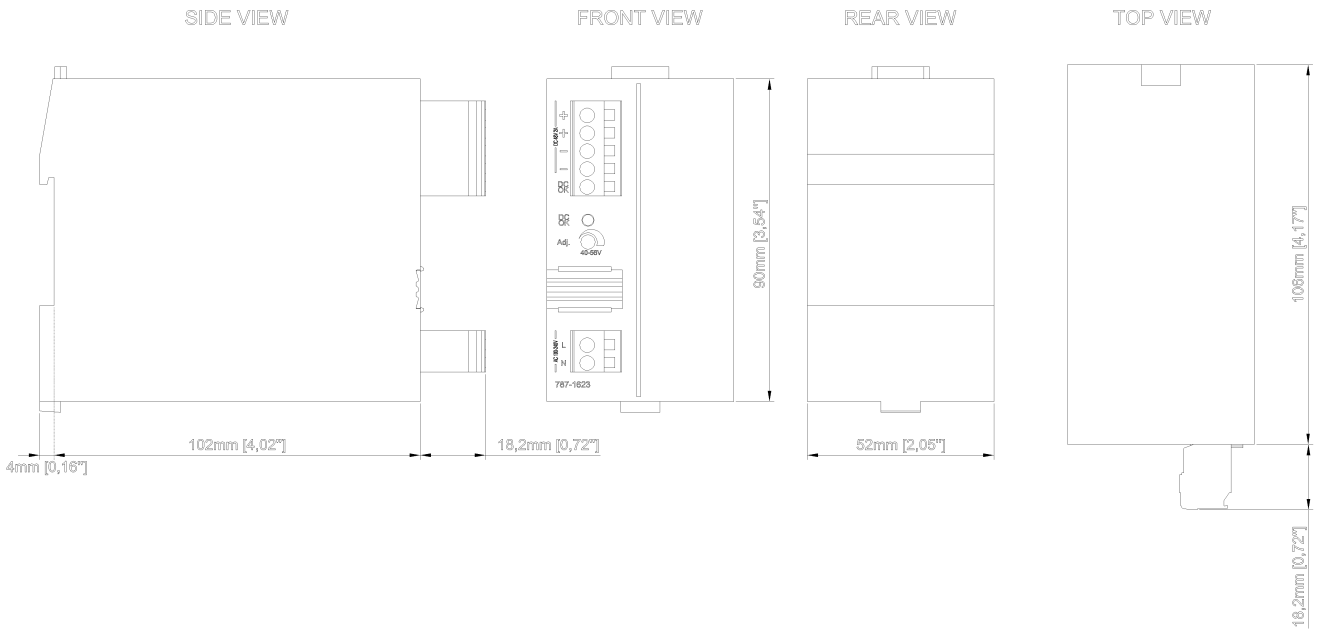

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

INPUT	
Phases	1
Nominal input voltage	100 to 240 VAC
Input voltage range	85 to 264 VAC; 120 to 372 VDC
Input voltage derating	-2.5 %/V (< 95 VAC)
Input current	≤ 0.97 A (240 VAC); ≤ 1.84 A (100 VAC)
Discharge current	≤ 1 mA
Inrush current	≤ 30 A
Power factor correction (PFC)	Passive
Mains failure hold-up time	≥ 80 ms (230 VAC); ≥ 15 ms (100 VAC)

OUTPUT	
Nominal output voltage	48 VDC (SELV)
Output voltage range	40 to 53 VDC (adjustable)
Factory preset	48 VDC
Nominal output current	2 A (48 VDC); 2.1 A (< 40 °C)
Nominal output power	96 W

SIGNALING AND COMMUNICATION	
Signaling	1 x LED DC OK (green); 1 x active signal output DC OK (48 VDC, 10 mA)
Operation status indicator	LED green

EFFICIENCY	
Power loss	≤ 1W (230 VAC; no load); ≤ 16.2W (230 VAC; nominal load)
Max. power loss	≤ 19.8W (100 VAC / 48 VDC; 2 A)
Efficiency	≥86%

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

FUSE PROTECTION

Internal fuse	T 4 A / 250 VAC
External fuse (required)	External DC fuse required for DC input voltage
External fuse (recommended)	Circuit breakers 6 A, 10 A, 16 A, characteristic: B or C an external DC fuse required for DC input voltage

GENERAL

Dimensions (WxHxL)	52mmx90mmx119mm
Weight	410 g
Type of mounting	DIN-35 rail
Protection class	II
Degree of protection	IP20

ENVIRONMENTAL

Operating Temperature	-25 to 70 °C
Storage Temperature	-25 to 85 °C
Relative humidity	5-96 % (no condensation permissible)
Derating	-3 %/K (> 50 °C)

STANDARDS

Conformity marking	CE
Standards/specifications	EN 60950-1; EN 61204-3; EN 60335-1; UL 60950-1; UL 508; GL

Used With

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.



FCDC2

Flowire Ethernet Converter - non-PoE This product has been replaced by 1008080310 FCDC3 Flowire Ethernet Converter

Item Number: 1008080210



FCDC3

Flowire Ethernet Converter - DC Voltage

Item Number: 1008080310



ICX-510-IA Intelligent Communication Gateway

ICX-510 incl ICX-AlphaCom Core

Item Number: 1002000110



ICX-510

Server for Zenitel Connect, providing HD voice and video communications

Item Number: 1002000200

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.