

1023131400

## EA1400

SPA V2 Amplifier 1 x 400W



- ✓ 1x 400 watt continuous effect
- ✓ Power efficient class D technology
- ✓ 110-230 VAC power
- ✓ 2HU
- ✓ Loudspeaker line monitoring



MED Certification



Onboard communication Audio


## Description

The EA1400 SPA V2 Amplifier is an analog class D amplifier designed for use in marine, offshore and other demanding environments. The amplifier utilizes state-of-the-art class D amplifier technology to ensure high power efficiency and superb audio quality.

The amplifier is self-monitoring including basic monitoring of the speaker lines. The audio output channels can be monitored for line faults such as shorts circuits and ground faults.

## Technical Dimensions


FRONT VIEW

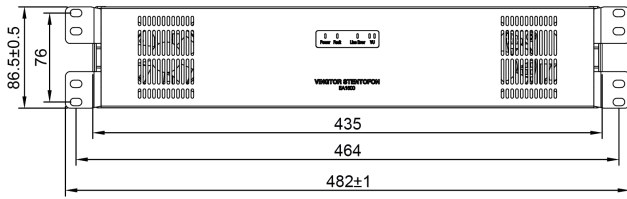


SIDE VIEW



TOP VIEW

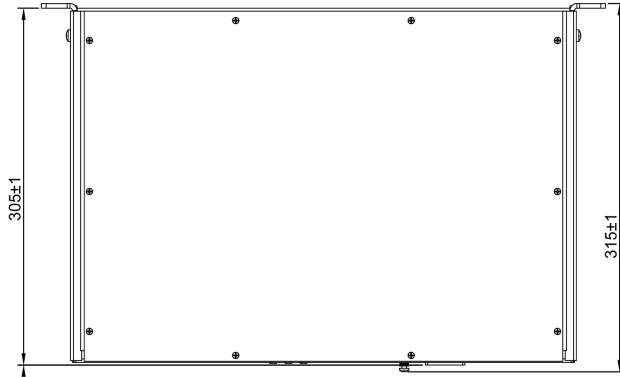

REAR VIEW



All dimensions in mm

# Specifications

## MECHANICAL

Dimensions (HxWxD)	87 x 482 x 308 mm
Weight	10 kg
Shipping Weight	11.5 kg
Mounting	19" Rack, 2HU
Color	Black

## USER INTERFACE

Indicators	Power, Fault, Line error, VU meter
Audio control	Volume, Bass, Treble, Pilot tone

## ENVIRONMENTAL

Operating temperature	-15°C to +55°C
Operating humidity	15% to 95% (non- condensing)
Storage temperature	-40°C to +70°C
Storage humidity	10% to 95% (non- condensing)
Air pressure	700 hPa to 1300 hPa
IP rating	IP-32
Environmental Condition	Protected

## ELECTRICAL

Connector	V-lock, IEC 60320-1 C14 compliant
Nominal voltage	100 – 230 VAC, 50-60 Hz
Inrush current	Max 22.5A
Power consumption	P(idle) ≤ 32 W, P(nom) = 570VA, P(overload) = 650VA

## LINE CONNECTION

Nominal input level	500 mVRMS – 1 VRMS
Input impedance	10 kΩ
Input level to trigger VOX for optional bypass	>35 mVRMS

## AUDIO OUTPUTS

Output power	400W music @ 55°C continuously, 400W alarm @ 55°C 30 min.
Output line technology	100 volt / 70 volt
Frequency response	200 Hz to 19 kHz ±3 dB
SNR	79dBA, A-weighted noise -81dBA
THD	<0.3% @ 1kHz @ 400W
Rated load resistance	100V: 25Ω, 70V: 12.5Ω
Rated load capacitance	470nF

## LINE MONITORING

Short circuit detection 100V / 70V	<12Ω / <6Ω impedance @ pilot tone enabled
---------------------------------------	--

Ground fault detection 100V / 70V	<100Ω / <70Ω impedance @ pilot tone enabled
--------------------------------------	---

## FAULT RELAY

(COM, NO, NC)	Max recommended levels: 1A, 100 VDC, 125VAC, switching 60W/62.5VA
---------------	--

## CERTIFICATIONS

Environmental	EN 60945
---------------	----------

Immunity - Emissions	EN/IEC 61000-4-2, EN/IEC 61000-4-3, EN/IEC 61000-4-5, EN/IEC 61000-4-6, EN/IEC 61000-4-11
----------------------	---

Safety	IEC 60529
--------	-----------

## Used With



### SPA-400D-V2

PA Main Unit, 19" Rack

Item Number: 2340130005