zenitel

DATASHEET

4000019327

P-6202

Billing Unit



Description

- Protected web interface management
- 2 x 100 Mbit Ethernet ports
- Call meta data logging for all calls made in a Phontech 6200 system
- Calculation of billing invoices for users of the system
- Pre-paid or post-call payment
- Password protected web interface management for printing reports, viewing call logs and managing account balances
- Call restrictions based on available account balances
- Complies with IEC 60945 Standard for Marine Equipment

www.zenitel.com info@zenitel.com

Last revision date: 2022-08-26 09:28

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.


ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

DNV-GL, ABS, RMRS type approval and compatible with NORSOK

The Phontech P-6202 Billing Unit is a supplementary to the Phontech 6200 system that allows for call record logging and billing of external and internal calls within the system. It allows logging of calls going to and from all other Phontech 6200 units in the network.

Call details such as source, destination and duration are logged with the ability to calculate billing prices based on destination numbers.

Technical Dimensions

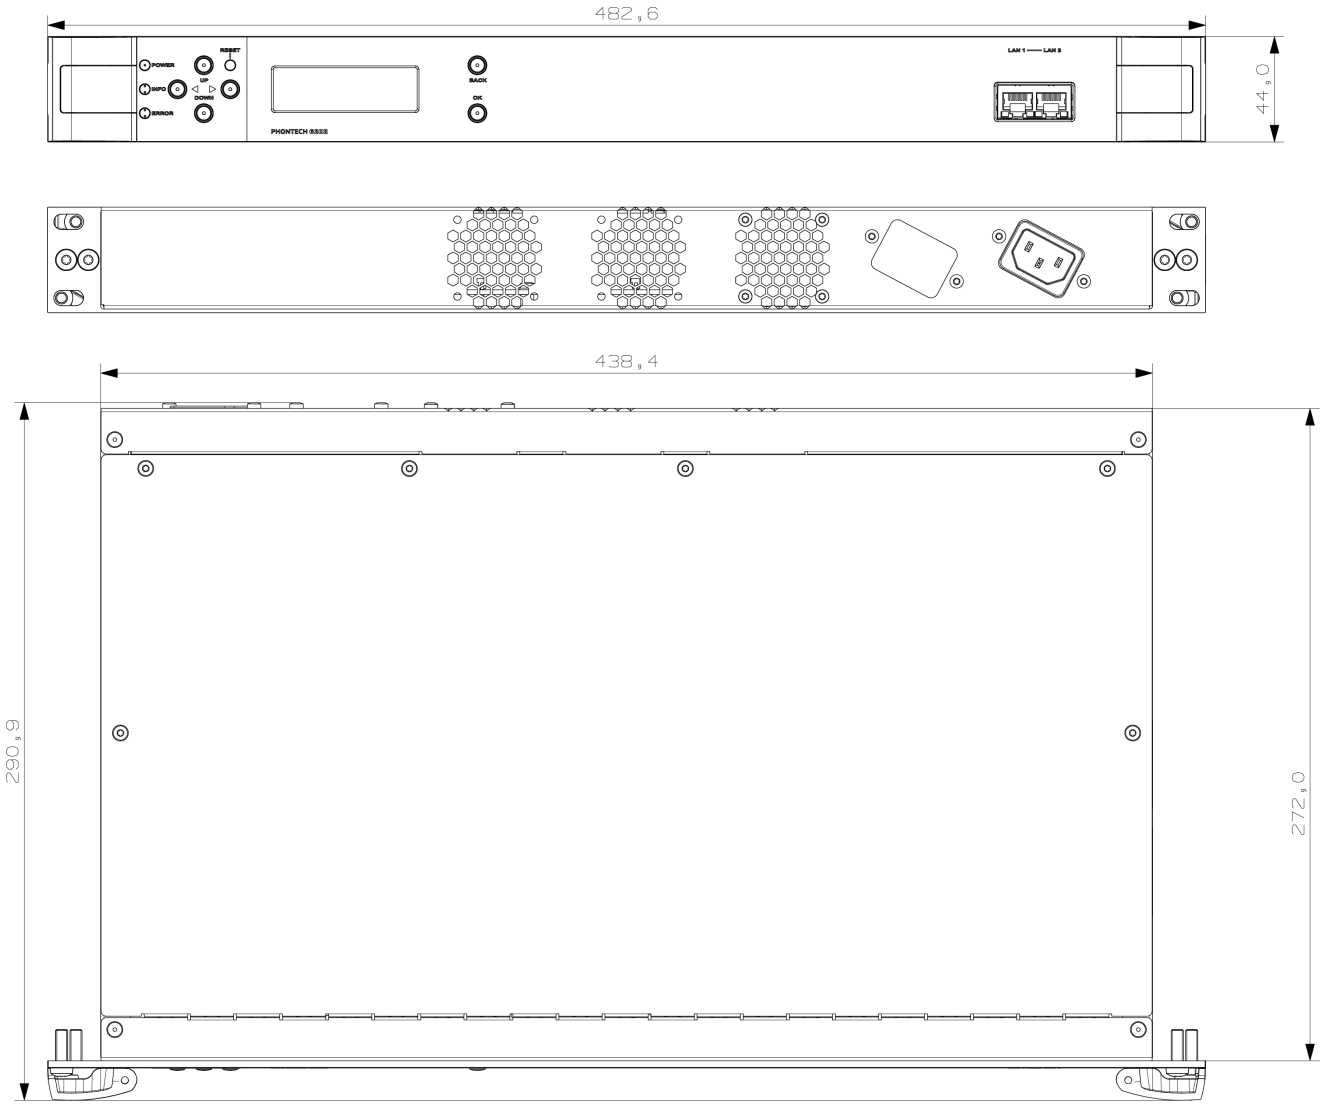

www.zenitel.com info@zenitel.com Last revision date: 2022-08-26 09:28

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

MECHANICAL

Dimensions	19” 1U rack mounted, D=246 mm
Weight	3.4 kg
Color	RAL 9005
Material	Steel / Plastic
Mounting	Rack/ Console
Fixing	4 x M5 bolts
Access	Front
Cable Entry	Rear and Front
Connector Type	RJ45

ELECTRICAL

Power Supply	220/110 VAC
Power Consumption	10 W (typical)
Heat Dissipation	<2 W
Compass Safe Distance	0.2 m

ENVIRONMENTAL

Temperature	-15°C to +55°C
Humidity	+93% (at +40°C)
Ingress Protection Rating	IP-20

www.zenitel.com info@zenitel.com Last revision date: 2022-08-26 09:28

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company’s Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.