

4000200100

**P-6210**

Desktop/Wall Telephone



---

---



## Description

- ✓ Integrated loudspeaker/microphone
- ✓ Handset, 2 meter sturdy curled cord
- ✓ Hands-free, duplex communication
- ✓ 2" Graphic backlit display:
  - ⊖ Menus and navigation wheel/key
  - ⊖ Contact list
  - ⊖ Caller ID
- ✓ Dimmable backlight (keypad)
- ✓ Privacy switch (Do not disturb) with priority override
- ✓ Manual PTT (push-to-talk) key

- ✓ 3 pcs programmable direct access keys (A-B-C)
- ✓ Volume adjustment with override
- ✓ Speakerphone SPL level >85dB(A) (integrated loudspeaker)
- ✓ Bulkhead mounted
- ✓ MMI according to IEC 62288 Ed 2.0
- ✓ Status/health indicator
- ✓ Multiple ring melodies
- ✓ Integrated call relay for external signal Device
- ✓ Output to external loudspeaker, 8 W – SPL level > 110dB (loudspeaker dependent)
- ✓ Headset connection
- ✓ Complies with IEC 60945 Standard for Marine Equipment
- ✓ DNV/ABS/RMRS/CCS type approval and compatible with NORSOK

The P-6210 Telephone is an indoor accommodation unit, normally used in cabins, offices, etc. The P-6210 is a UpN digital station with handset, loudspeaker, internal microphone, memory functions and more. The unit can be desk or bulkhead mounted.

## Technical Dimensions

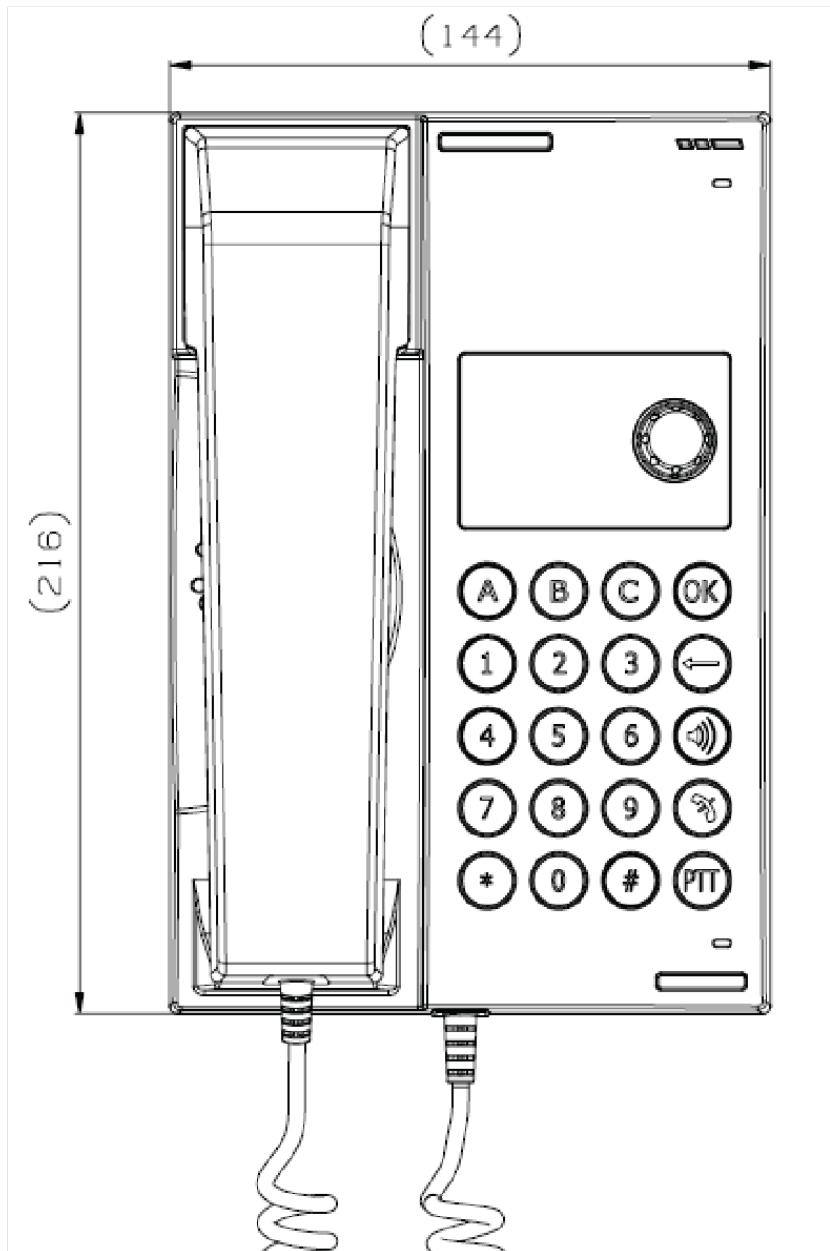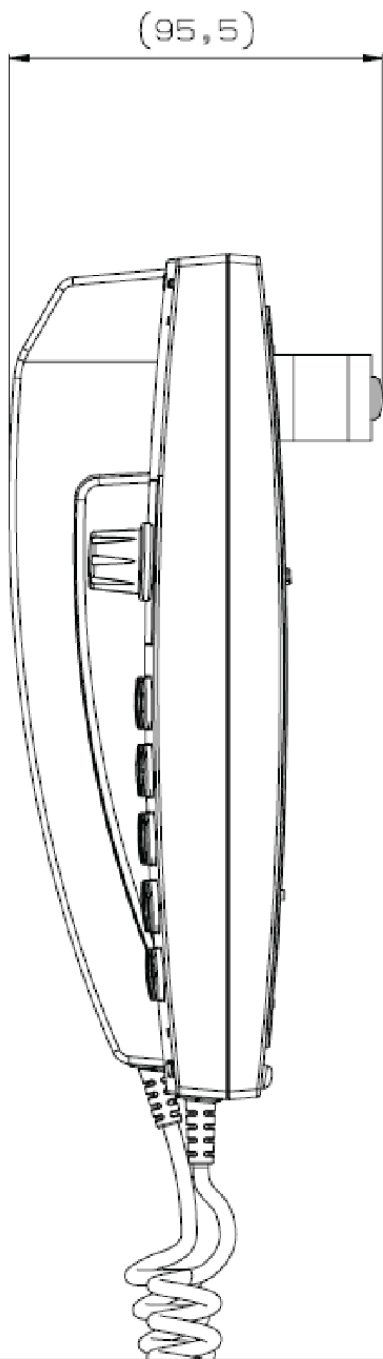

# Specifications

## MECHANICAL

Dimensions (WxHxD)	144 x 216 x 95.5 mm
Weight	0.9 kg
Material	Plastic (PC/ASA)
Color	Grey – RAL 7021/7043
Mounting	Table / Wall with wall contact
Fixing	Bulkhead: 2 x M4 bolts
Access	Front
Cable Entry	Rear
Connector Type	RJ45 (line) / RJ12 (headset)

## ELECTRICAL

Power Supply	220/110 VAC, 48/24 VDC (dual redundant)
Line Format	UpN (Digital 2Wire – 2B+D)
Power Consumption	3 W (max)
Termination	RJ45, two centre cores / Wall Contact
Compass Safe Distance	>5 m

## ENVIRONMENTAL

Temperature	-15°C to +55°C
Humidity	+93% (at +40°C)
Ingress Protection Rating	IP-22
UL94	V0