

4000013288

HP-30T

Horn Speaker 30W, Waterproof



IP67

Description

- ✓ Wall loudspeaker w/ transformer for accommodation use.
- Excellent for P.A. intercom and background music
- With transformer for 100V amplifier line

When mounting the loudspeaker please ensure that it is re-assembled in the same manner in which it was assembled. Fasten bracket with 1-3 screws. To change the position of the loudspeaker please adjust the bracket (by loosening / tightening the screws) as required. For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated. Do not open loudspeaker when in use. Fasten lid with a torque of 2 - 3 Nm.

page 1/3


www.zenitel.com

info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Technical Dimensions

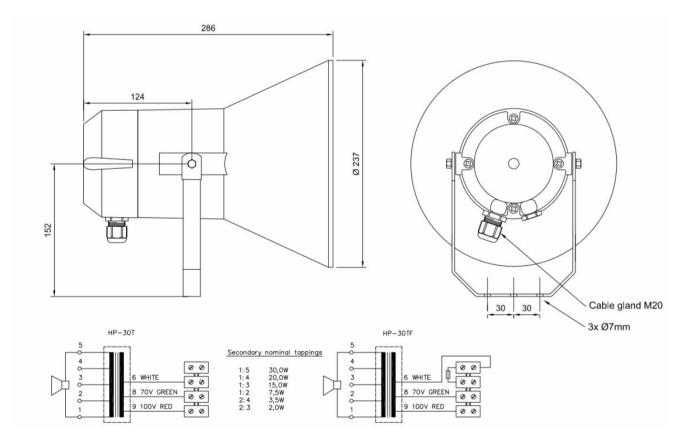

www.zenitel.com

info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

GENERAL

Dimensions (mm)	237Ø x 298D
Weight	2. 3 kg
Mounting	Bracket
Material/Color	Polyamide / RAL 7035
Temperature range	Max. / min. amb. temp 90°C / -40°C
Max. / min. ambient temperature	150 °C / -50 °C
IP-Rating	IP-67
Connections	Internal screw connections
Rated/ max. power	30W / 40W
SPL 1W/1m	110dB
SPL rated power	124dB
Effective freq.range	310 – 8000 Hz
Dispersion	(-6dB)1kHz / 4kHz 115° / 30°
Environmental Condition	Exposed

page 3/3

www.zenitel.com

info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.