

3006100084

## SAFE-10PTF

Loudspeaker Bathroom




### Description

- ✓ Loudspeaker w/fuse for accommodation area
- ✓ With 70 / 100V line transformer
- ✓ Wall mounting
- ✓ Waterproof
- ✓ ABS plastic

When mounting the loudspeaker please ensure that it is re-assembled in the same manner in which it was received. To open the cabinet, press the clip on the short end of the cabinet, and lift the cabinet from the mounting plate. Fasten the mounting plate to wall or ceiling by 4 screws, and clip on the front cover. For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated. The loudspeaker is equipped with four alternative cable entry ports. Do not open loudspeaker when energized.

# Technical Dimensions

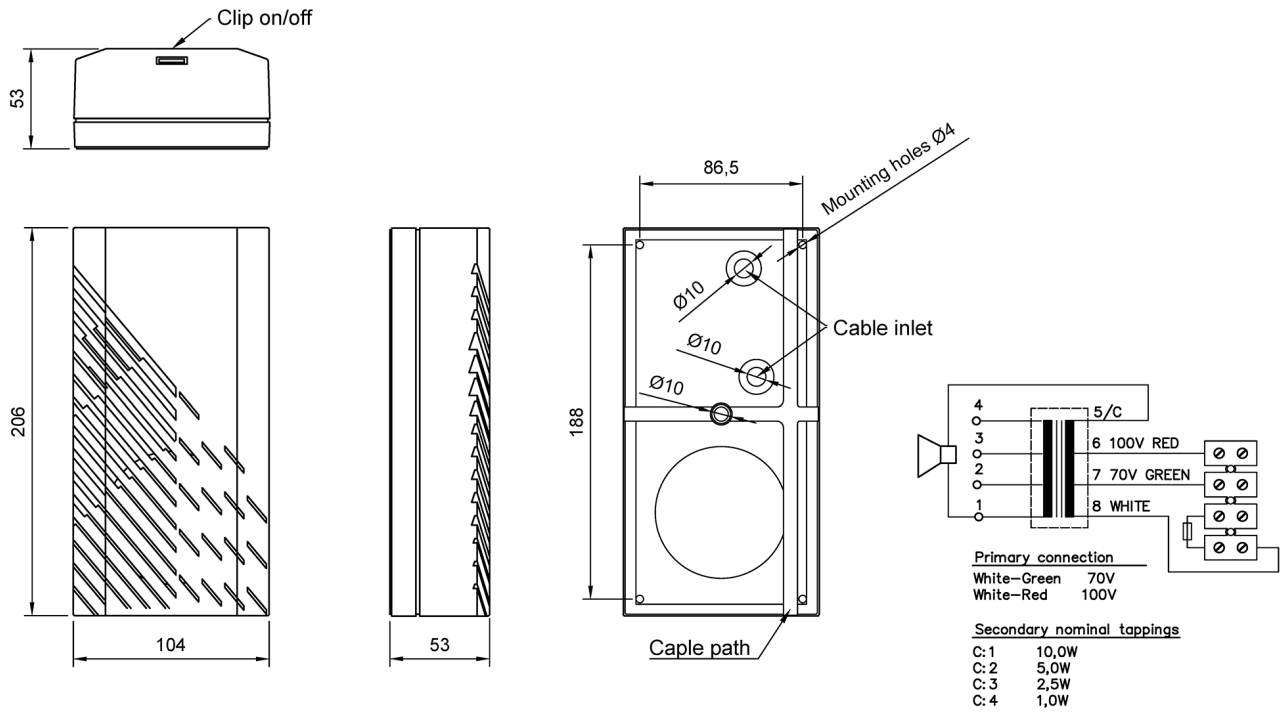

# Specifications

## GENERAL

|                                 |  |
|---------------------------------|--|
| Dimensions (mm)                 | 206W x 104H x 55D                                      |
| Weight                          | 0.8 kg   |
| Mounting                        | 4 screws   |
| Material/ Color                 | ABS / RAL 9010   |
| IP- rating                      | IP-44  |
| Temperature range               | Max. / min. amb. temp<br>90°C / -40°C                  |
| Max. / min. ambient temperature | 90°C / -40°C   |
| Cable entry                     | 1x PG-7 / 2x cable inlet<br>11mm with rubber<br>gasket |
| Connections                     | Inside screw terminal                                  |
| Rated / max. power              | 10 W / 15 W  |
| SPL 1W/1m                       | 85dB   |
| SPL rated power                 | 95dB   |
| Effective freq.range            | 160 - 20000Hz  |
| Dispersion                      | (-6dB)1kHz / 4kHz 140°<br>/ 100°                       |
| Secondary nominal<br>tappings   | 10,0W - 5,0W - 2,5W -<br>1,0W                          |
| Environmental<br>Condition      | Protected  |