zenitel

DATASHEET

4000010759

HP-15

Horn Loudspeaker, 15W, 20 Ohm, IP66/IP67



- Suitable for outdoor and indoor installation
- IP66/67

IP67

Description

The HP-15 is a compact 15 W horn speaker delivering a powerful 108 dB SPL at 1W/1m. Built from durable ASA and rated IP66/67, it ensures reliable performance in harsh indoor and outdoor environments. With a frequency range of 330–8000 Hz, wide dispersion, and a robust mounting bracket, the HP-15 is ideal for public address, safety, and industrial communication systems.


Technical Dimensions

www.zenitel.com info@zenitel.com Last revision date: 2026-07-16 09:47


Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

LEFT VIEW

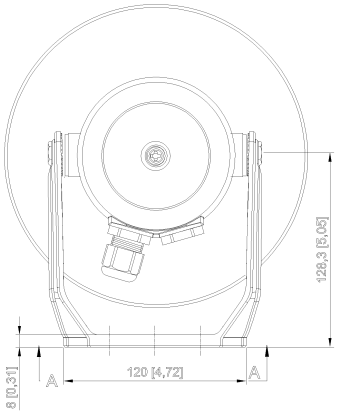


FRONT VIEW

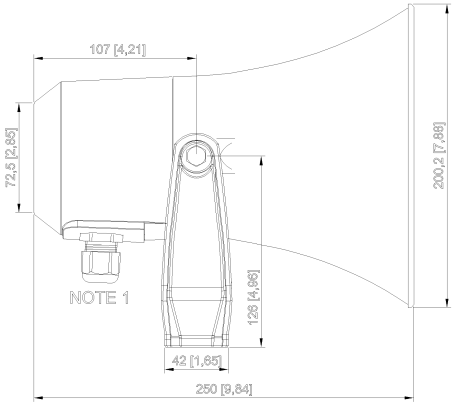

NOTES:

1. 1xM20 cable gland, 1xM20 blinding plug. Cable diameter 5-12mm
2. All outside nuts, bolts and washers in stainless steel

DETAIL VIEW A-A



Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

GENERAL

Rated power	15 W
SPL 1W / 1 m	108 dB
SPL rated power	118 dB
Effective freq. range	330 - 8000 Hz
Dispersion (-6dB) 1kHz / 4kHz	130° / 33°
Enclosure material / Colour	ASA / RAL 7035
Mounting material	Plastic bracket
Dimensions	Ø 200 x 250D
Termination	Spring clamps
Connection	1x M20 cable gland, 1x M20 blanking plug
M20 cable gland sealing range	5 - 12 mm
Weight	0.78 kg
IP-rating	66 / 67
Max. / min. amb. temp	90°C / -50°C
Environmental Condition	Exposed

www.zenitel.com info@zenitel.com Last revision date: 2026-07-16 09:47

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.