



2310601036 **170133-10** 144X144MM, TC-M SECOND

## Description

- The clock is equipped with an adjustable background light and has black hour and minute hands, and a red second hand
- External dimming potentiometer is included in the package
- The hands are protected by a plain acrylic glass
- DCF format with time zone adjustment
- 2-wire bus connection with power and serial time code

The analog clock for wired DCF Time-Code from Marine Master Clock provides the possibility to create a time distribution system, with high accuracy and high reliability. The clock is intended for connection to a 2-wire bus which combines power supply and serial Time-Code. A built-in microprocessor receives the Time Code, reads the position of the hands, and sets the clock to the correct time. The Time-Code, built up according to the DCF-format, contains information about year, month, day hour and minute. At each minute shift, seconds are synchronised as well. The transmission speed is 1 bit/second. A 24VDC power supply for the built-in electronics is combined with the

#### www.zenitel.com


#### info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Time-Code. The clock is intended for time zone adjustment from a Marine master clock.

## **Technical Dimensions**

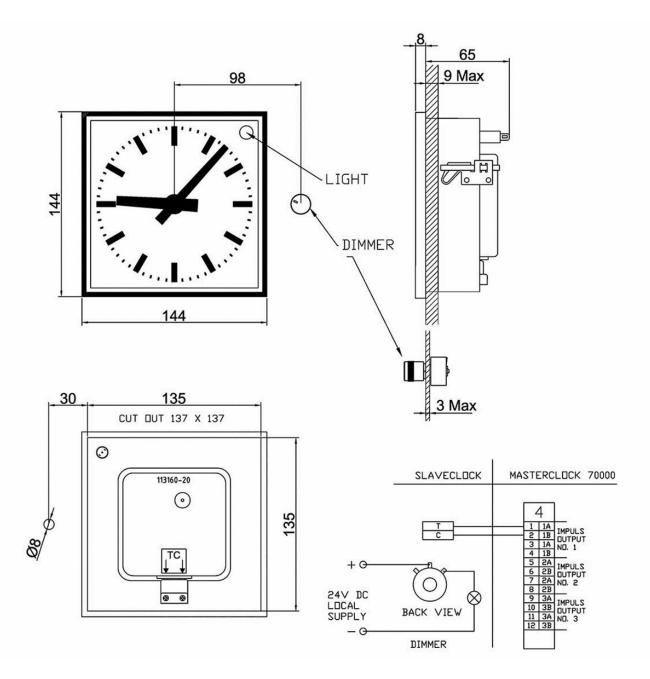

#### www.zenitel.com

#### info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

# Specifications

### GENERAL

Mounting	Console mounting
Housing	Anodized aluminium
Colour	Black frame, white face, black hands and marks
Dimensions (mm)	144W x 144H x 56D
Connection	2 wire
Connection voltage	24VDC combined with serial Time-Code
Type of time code	DCF-format with Time zone adjustment.
Microcontroller	PIC16F628
Temperature range	-20°C to +50°C
Power consumption	15 mA

#### www.zenitel.com

#### info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.