

3006100028

## CP-66T

Loudspeaker Wall-Mount Double Faces 6W



- ✓ Double faced loudspeaker w/ transformer for accommodation area
- ✓ Ideal for PA intercom and background music
- ✓ To be used together with 70/100V line amplifier
- ✓ 6W rated power





Onboard communication

## Description

The CP-66T is a general purpose loudspeaker to be used on 70/100 V lines. The loudspeaker is bi-directional and disperses audio in both directions. This feature makes this speaker very well-suited for corridors and other applications where audio has to be evenly distributed.


## Technical Dimensions

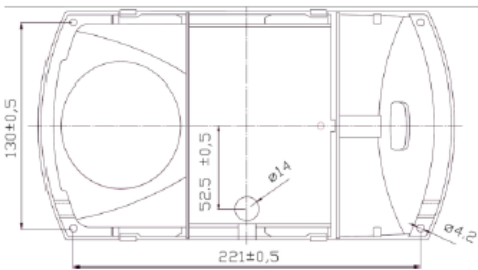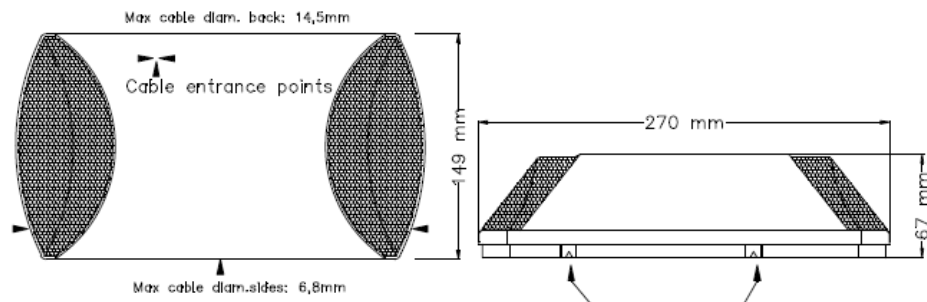

Remove the lid by pressing the two clips on each side of the loudspeaker.



**CIRCUIT DIAGRAM**

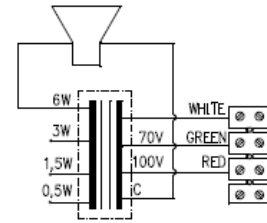

70/100 volt combined transformer	
<b>Primary connections</b>	
White : Green	70 V
White : Red	100 V
<b>Secondary nominal tapings</b>	
C : 6,0 W	6,0 W
C : 3,0 W	3,0 W
C : 1,5 W	1,5 W
C : 0,5 W	0,5 W

# Specifications

## GENERAL

Material / Color	ABS / RAL 9010
Dimensions (LxDxH)	270mm x 67mm x 149mm
Mounting	Direct. Four screws.
Termination	Internal screw terminals
Weight	0.77 kg
Rated / Max power	6 W / 10 W
SPL 1W / 1 m	86 dB
SPL rated power	94 dB
Effective frequency range	140 - 20000 Hz
Dispersion (-6dB) 1kHz / 4kHz	250° / 195° (horizontal)
Environmental Condition	Protected
IP Rating	IP 20