zenitel

DATASHEET

3006100028

CP-66T

Loudspeaker Wall-Mount Double Faces 6W



- Double faced loudspeaker w/ transformer for accommodation area
- Ideal for PA intercom and background music
- To be used together with 70/100V line amplifier
- 6W rated power

Onboard communication

Description

The CP-66T is a general purpose loudspeaker to be used on 70/100 V lines. The loudspeaker is bi-directional and disperses audio in both directions. This feature makes this speaker very well-suited for corridors and other applications where audio has to be evenly distributed.


Technical Dimensions


www.zenitel.com info@zenitel.com

Last revision date: 2024-05-21 08:58

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

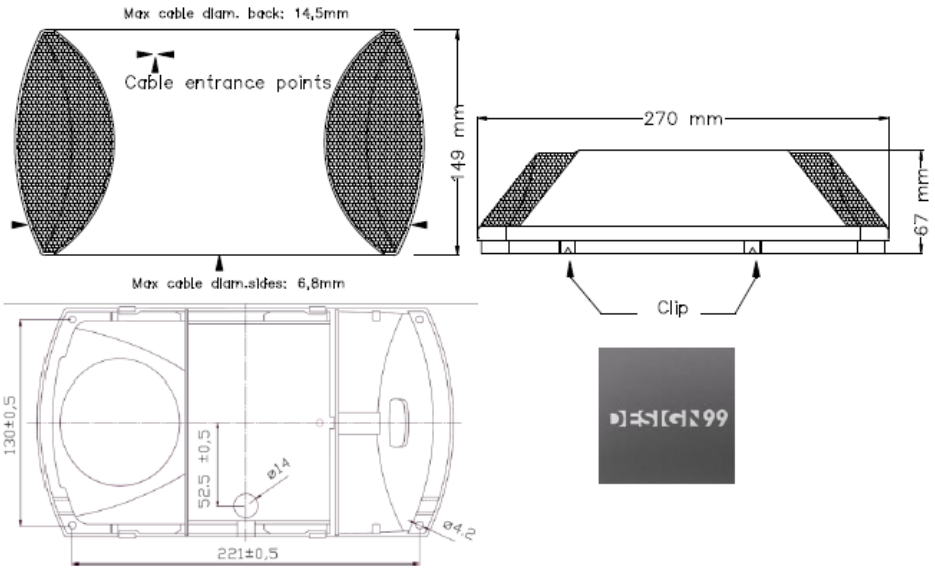



70/100 volt combined transformer Primary connections	
White : Green	70 V
White : Red	100 V
Secondary nominal tappings	
C : 6,0 W	6,0 W
C : 3,0 W	3,0 W
C : 1,5 W	1,5 W
C : 0,5 W	0,5 W

Remove the lid by pressing the two clips on each side of the loudspeaker.

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

GENERAL

Material / Color	ABS / RAL 9010
Dimensions (LxDxH)	270mm x 67mm x 149mm
Mounting	Direct. Four screws.
Termination	Internal screw terminals
Weight	0.77 kg
Rated / Max power	6 W / 10 W
SPL 1W / 1 m	86 dB
SPL rated power	94 dB
Effective frequency range	140 - 20000 Hz
Dispersion (-6dB) 1kHz / 4kHz	250° / 195° (horizontal)
Environmental Condition	Protected
IP Rating	IP 20

www.zenitel.com info@zenitel.com Last revision date: 2024-05-21 08:58

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.