zenitel

DATASHEET

4000086829

BIVEP-6T

Projector speaker 6 watt

- Bi-directional



Onboard communication

Description

- Double faced projector w/ transformer for accommodations area
- Ideal for P.A. announcements and background music applications
- To be used together with 70/100V line amplifier


The BIVEP-6T is a general purpose projector to be used on 70/100 V lines. The projector is bidirectional and disperses audio in both directions. This feature makes this speaker very well suited for corridors and other applications where audio has to be evenly distributed.


www.zenitel.com info@zenitel.com Last revision date: 2023-12-01 07:49

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.


ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Technical Dimensions

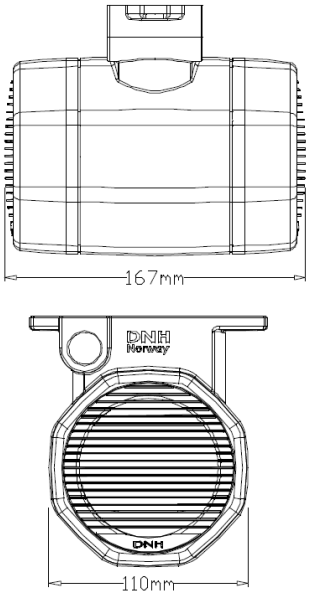

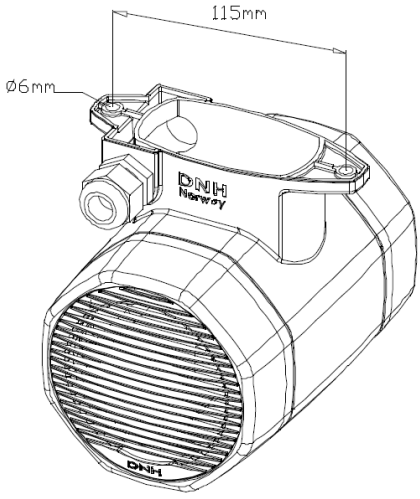

1xM20 blinding plug
1xM20 gland

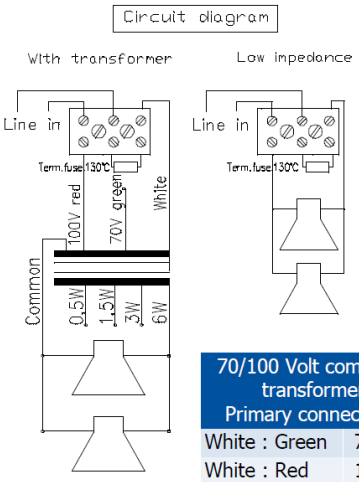

70/100 Volt combined transformer Primary connections	
White : Green	70 V
White : Red	100 V
Secondary nominal tappings	
C : 6	6,0 W
C : 3	3,0 W
C : 1,5	1,5 W
C : 0,5	0,5 W

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

GENERAL

Material / Color	ABS / RAL 7035
Dimensions (LxDxH)	167mm x 120mm x 120mm
Mounting	Foot bracket
Termination	Ceramic screw terminals
Weight	0.94 kg
Rated / Max power	6 W / 10 W
SPL 1W / 1 m	87 dB
SPL rated power	94 dB
Effective frequency range	150 - 20000 Hz
Dispersion (-6dB) 1kHz / 4kHz	360° / 2x70° (bidirectional)
IP-rating	44
Environmental Condition	Protected

www.zenitel.com info@zenitel.com Last revision date: 2023-12-01 07:49

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.