zenitel

DATASHEET

1020600992

IRR-3

Relay Box



IP66

Description


- Multi-purpose relay unit rated for 24VDC or 220V AC visible and/or audible signal units
- 24VDC operation voltage
- Local mute function for SPA Public Address System
- Wall mounting
- Suitable for installation in noisy areas

www.zenitel.com info@zenitel.com Last revision date: 2026-09-18 10:31

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Technical Dimensions

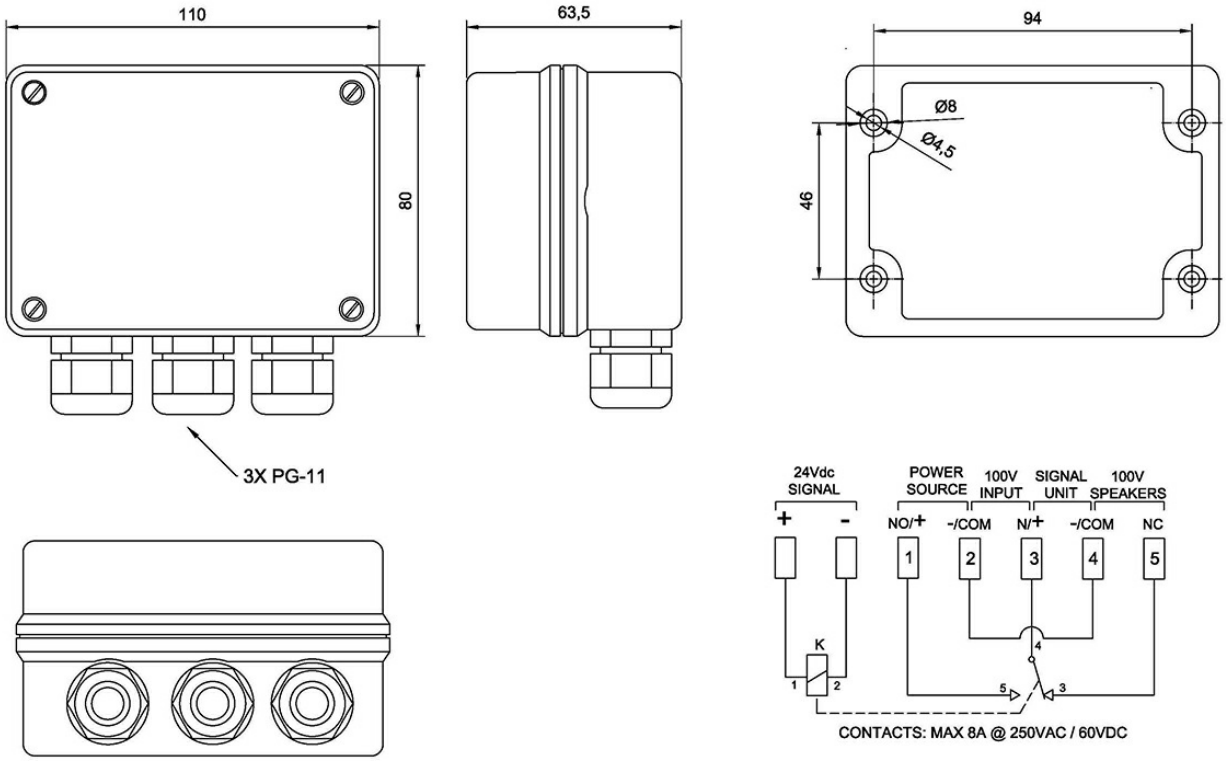

www.zenitel.com info@zenitel.com Last revision date: 2026-09-18 10:31

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

GENERAL	
Connections	Screw terminals
Switching current (max)	8A
Material	Flame retardant blend plastic housing
IP class	IP-66
Dimensions (mm)	80W x 110H x 63D
Cable inlet	3x PG-11
Weight	0.35 kg

https://wiki.zenitel.com/wiki/IRR-3_Relay_unit

www.zenitel.com info@zenitel.com Last revision date: 2026-09-18 10:31

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.