

1008431000

CRM-V-2

IP Flush Master Station

- Robust aluminium front plate
- Four dynamic navigation keys and four DAK keys for quick access to system menus and directory entries.
- White light behind all keys for excellent readability in dark environments
- Optional noise cancelling goose-neck microphone
- Optional handset unit
- Optional IP DAK-48 Unit
- ONVIF Compatible
- Integrated data switch with advanced networking and security functions
- Superb audio quality – high bandwidth codec, active noise cancellation, acoustic echo cancellation and high output power amplifier
- Clean relay output contact for control of external equipment

SIP Control Room Solutions | IC-EDGE IC-Edge | ICX ICX-AlphaCom | Automatic Gain Control | Active Noise Cancelling | Open Duplex

Description

The CRM-V-2 IP Flush Master with Display is an IP control room intercom intended for use in control and guard rooms. The station features a large high contrast display with adjustable backlight and up to 8 lines with 20 characters. The station has four direct access keys. Each key has a red and a green LED to show status.

The IP station supports open standards and is compatible with ICX-AlphaCom, IC-EDGE and iPBXs using SIP technology. When working in ICX-AlphaCom mode, the IP station supports special services only available using the CCoIP protocol, as employed by the AlphaCom server. Examples of services are emergency broadcast with volume override, CCTV integration, call priority, and AlphaNet multisite networking and event scripting.

Like all Zenitel stations, the CRM-V-2 features superb audio quality. This is enabled through a set of advanced technologies such as active noise filtering, acoustic echo cancellation, wide band audio codec, and high power audio outputs. The IP station has an integrated managed data switch providing advanced networking and security features. The integrated switch provides support for:

- Protection from unwanted access
- Quality of Service (QoS) by managing data traffic
- Cost efficient installation by providing shared network connections

To provide maximum availability the station comes with advanced supervision functions. The station line test will detect if there is any faults in the network or station electronics. In addition the station supports tone test, testing the complete transmission path including microphone and speaker. The status of the stations is reported to AlphaWeb as well as to 3rd party management systems using SNMP, Syslog or OPC.


In IC-EDGE mode, the CRM-V-2 can be configured as the Edge Controller.

See also: additional documentation on wiki.zenitel.com

Technical Dimensions

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

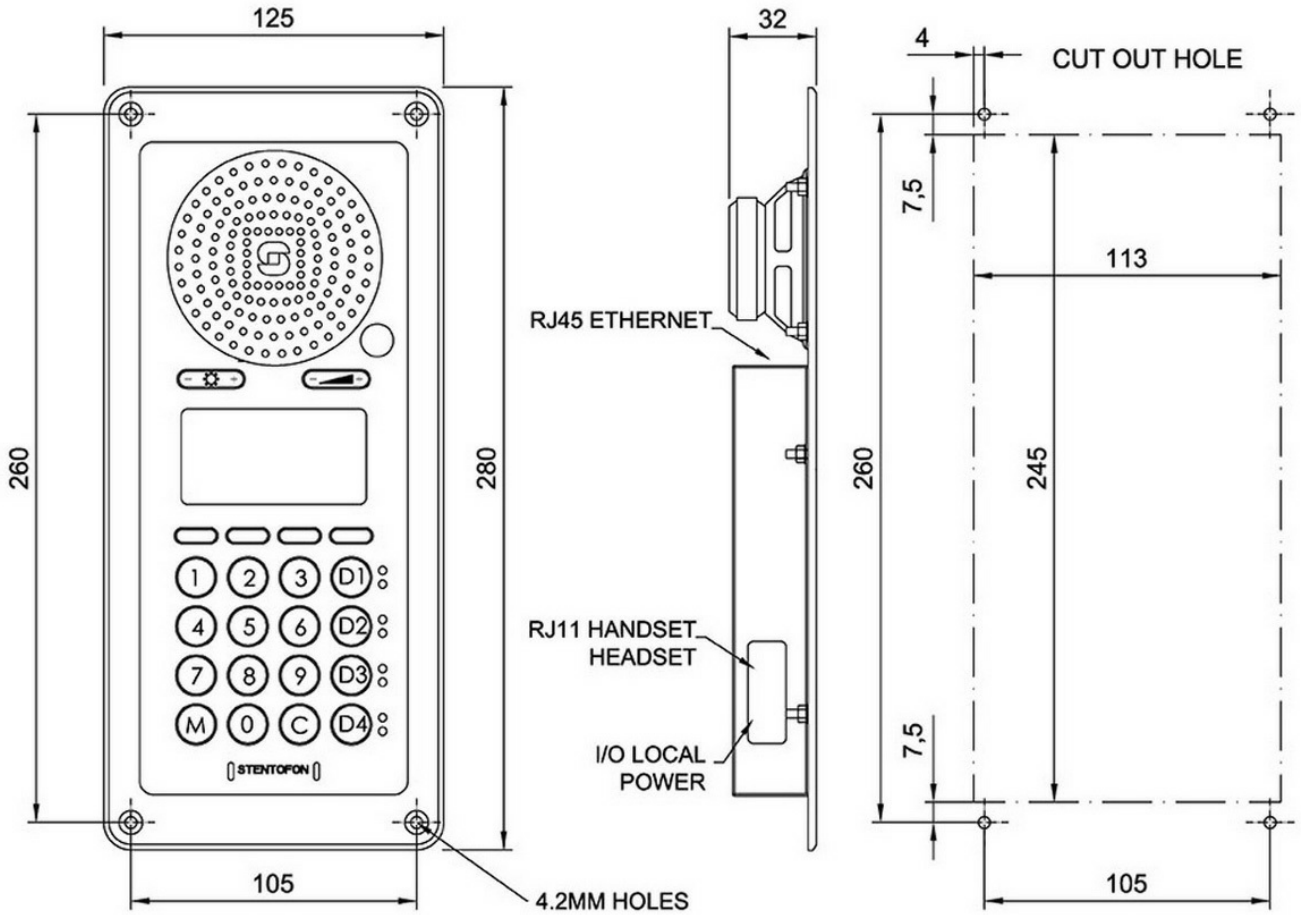

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

www.zenitel.com info@zenitel.com Last revision date: 2026-06-24 13:52

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

GENERAL

Dimensions (WxHxD)	125 x 280 x 33 mm
Weight	0.63 kg
Temperature Range	-15ºC to + 50ºC
Relative humidity	< 95% not condensing
User interface	Backlit graphical display, 35 mm x 68 mm, 4 function keys, 4 programmable direct access keys (DAK), Green/Red status, LED per DAK, Full keypad, Call indication LED
Power	Power over Ethernet, IEEE 802.3 a-f, Class 0, Local power 19 – 27 VDC, Idle 4W, max. 8W
Connectors	RJ45 (Ethernet) - RJ11 (Handset & Headset), Pluggable screw terminals (I/O local power)
Remote control Max. switching capacity , Max. voltage relay, Max current relay	3 digital inputs, 1 relay output and one logical output, 30W DC, 60V DC, 1A DC
SIP	RFC 3261, SIP Info (DTMF), RFC 2833 (DTMF)
IP protocols	IP v4 - TCP - UDP - HTTPS – TFTP - RTP - RTCP -DHCP - SNMP - DiffServ - TOS – ONVIF - CCoIP® - SIP - RSTP
LAN protocols	Power over Ethernet (IEEE 802.3 a-f), VLAN (IEEE 802.1pq), Network Access Control (IEEE 802.1x)
Audio technology	Telephony 3.4kHz (G.711) , Wideband/HD Voice (G.722), Active noise filtering, Acoustic echo cancellation, Open duplex, Volume override
Audio output	1.5 Watt integrated loudspeaker. Maximum sound pressure level up to 85 dBA @ 1 m (1 kHz tone signal).
Management and operation	HTTPS (Web configuration), DHCP and static IP, Remote automatic software upgrade, Centralized monitoring, Status LED
Advanced features	Dual port managed data switch supporting VLAN and network access control
Compliance	CE and FCC Part 15
IP Rating	IP-32
Warranty	2 Years standard warranty, extendible up to total of 5 years (additional fee)

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Accessories



CRM-V-GN

Gooseneck Microphone for IP Flush Master CRM-V

Item Number: 1008097500



On-Wall Back Box

Item Number: 1008098600



Flush Mount Back Box

Item Number: 1008098700



Single Desk Stand

Item Number: 2810020006



Dual Desk Stand

Item Number: 2810020005



Triple Desk Stand

Item Number: 2810020004



CRM-VH

Headset Solution

Item Number: 2213100000

Used With



CRM-V-DAK48

48-Key DAK Expansion Module for CRM-V-2

Item Number: 1008010100



CRM-V-HS

Handset for IP Flush Master CRM-V

Item Number: 1008097100

www.zenitel.com info@zenitel.com Last revision date: 2026-06-24 13:52

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.