
zenitel

DATASHEET

2310601051

Impulse Amplifier 230VAC

116279-01

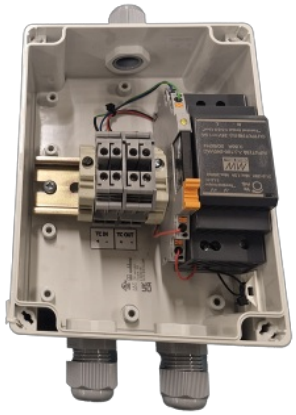

The impulse amplifier is intended for amplification of 24V Time Code marine

Description

- To amplify polarized impulses from a master clock or wired time code, TC


Technical Dimensions


www.zenitel.com info@zenitel.com

Last revision date: 2026-03-11 10:32

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

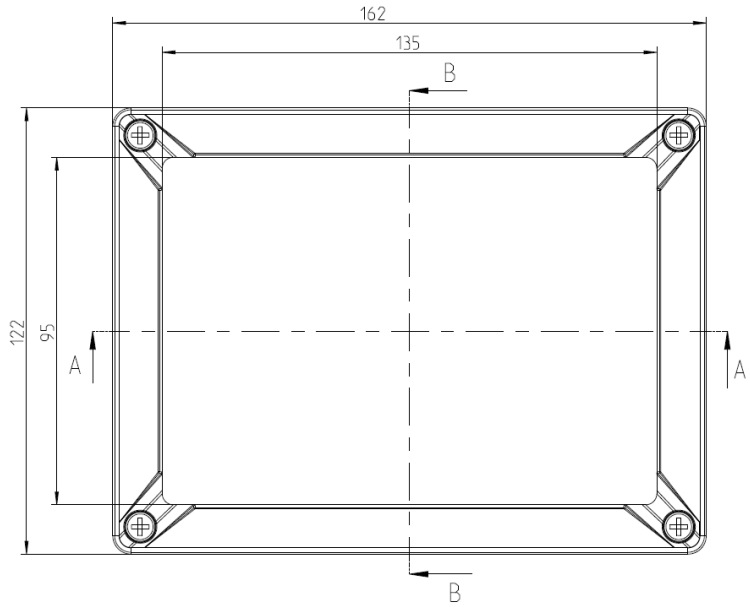

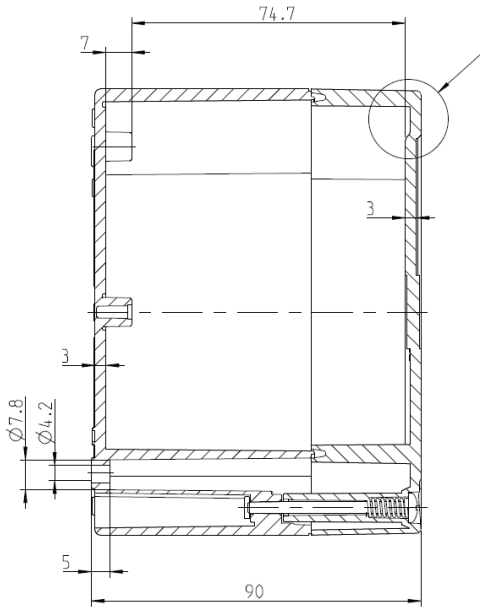

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

GENERAL	
Connection	230 V AC -10% +5% 50-60Hz
Weight	0.7 kg
Crystal frequency	4,19304 MHz
µ-Controller	PIC 16C54
Max. load impulse outputs	TC: 1 A
Ambient temperature	0°C up to +40°C
Relative humidity	Max. 85%
IP rating	IP 66
Color	Grey (Polycarbonate)
Dimensions	W=122mm, H=162mm, D=90mm

Used With



Marine Master Clock 70000

123378-01 Marine Master Clock 70000

Item Number: 3005050028



Marine Master Clock with Network Time Server, 70000L

123378-11 Marine Master Clock 70000L With Network Time Server

Item Number: 3005050029

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.