zenitel

DATASHEET



2340200017

B300LDA-24R-LED

Multi-function Beacon, LED, 24vDC, IP65, Red

- Bayonet fixing lens.
- Anti-tamper locking screw.
- Stainless steel fixings.
- Total of 9 user selectable operation modes:
  - 4 rotating configurations.
  - 4 flashing configurations.
  - Steady mode for status applications.

Description


The B300 series is comprised of a Xenon strobe beacon, permanent filamentbulb or halogen beacon, blinking filament bulb or halogen beacon, rotating beacon and a multi-function LED array beacon.

Technical Dimensions

www.zenitel.com info@zenitel.com Last revision date: 2024-10-29 09:48

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

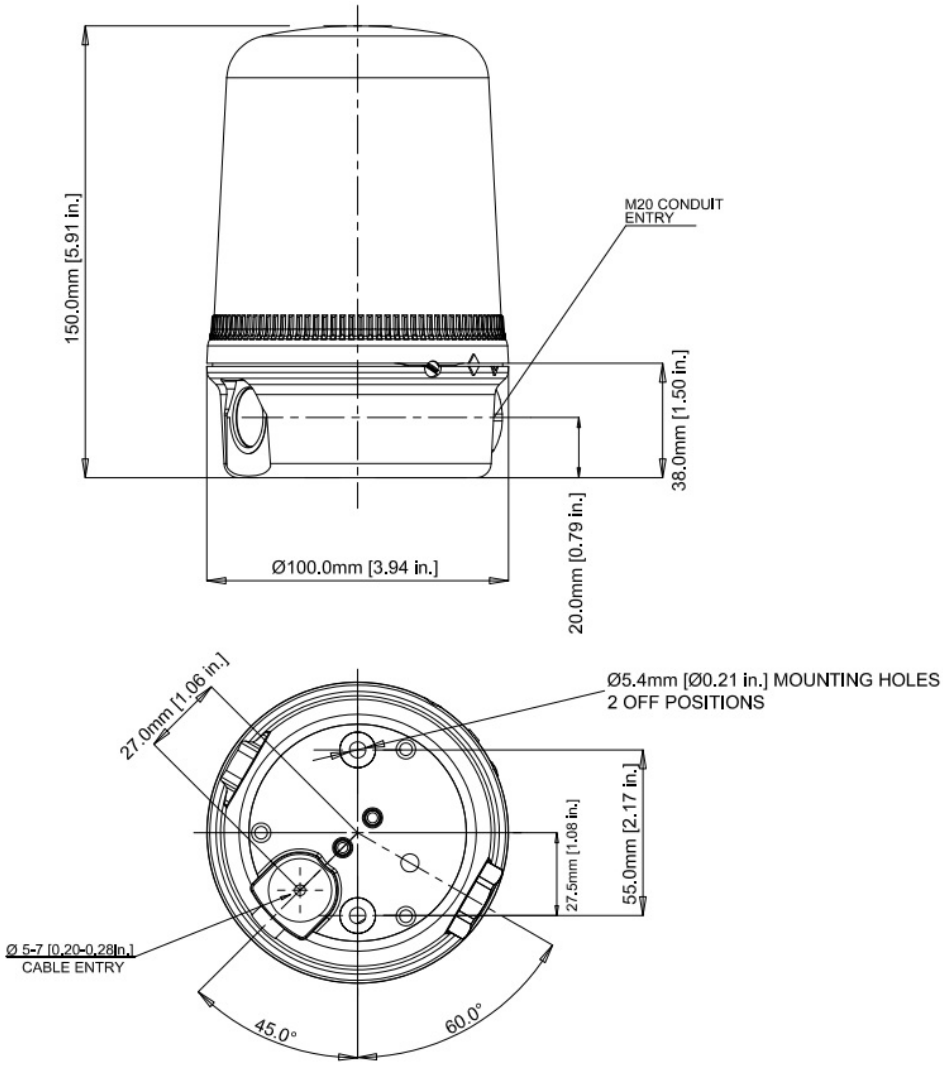

www.zenitel.com info@zenitel.com Last revision date: 2024-10-29 09:48

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

GENERAL	
IP Rating	IP65
Light source	Array of 16 High output LEDs
Peak/Effective Intensity cd	19 cd* – measured ref. to I.E.S.
Lens type	Prismatic (standard) or plain
Mounting	Surface mount
Entries	1 × 5-7mm push through grommet, 1 x M20 cable entry
Dimensions	ø100 x 150mm
Weight	370g
Current mA	130mA @ 24V dc
Environmental Condition	Protected

ORDER NUMBER	DESCRIPTION
2340200017	B300LDA-24R-LED, LED Beacon 24vDC Mutlifunc. IP65, RED
2340200015	B300LDA-24B-LED, LED Beacon 24vDC Mutlifunc. IP65, BLUE

www.zenitel.com info@zenitel.com Last revision date: 2024-10-29 09:48

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.