

2310131029

WASEX2T4AT EX

WASEX WASHER PUMP WITH EX-PROOF SOLENOID VALVE



- ✓ Delivery head: 20m (66ft) or 30m (98ft)
- ✓ Water tank capacity: 10l (2.6gal)
- ✓ Suitable for MAXIMUS series or with third-party products
- ✓ Power supply in 24Vac/dc, 5W max

Description


The WASEX washer pump is an important element for effective video surveillance in hazardous areas because it guarantees sharp images in all environmental conditions and reduces the need for maintenance.

The WASEX system is designed for the MAXIMUS series, but is also compatible with third-party products. The kit includes a stainless steel 10-litre tank with certified explosion-proof solenoid valve, controlled by the telemetry of the MAXIMUS products or by a manual electrical contact.

The WASEX product is Lloyd's Register Type Approval System Test Specification Number 1 certified and therefore can be used in marine and offshore applications for environmental categories ENV1, ENV2, ENV3 and ENV5.

Technical Dimensions

The indicated measurements are expressed in millimetres.

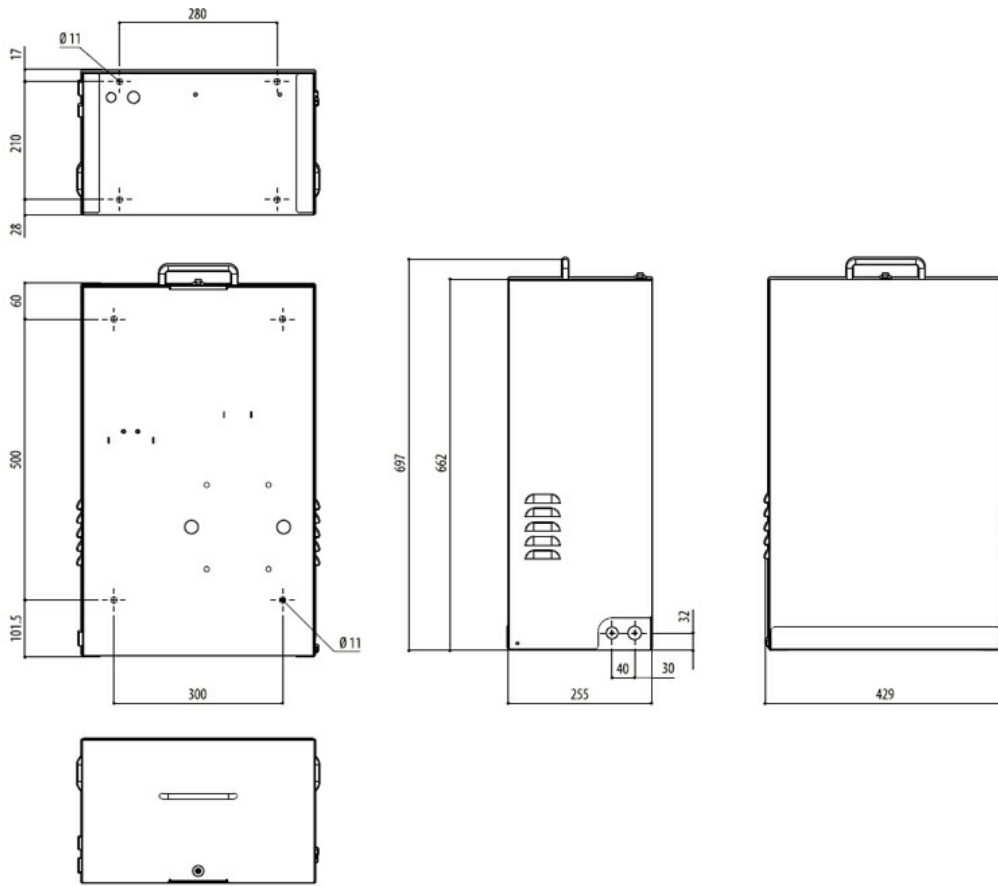

WASEX

Specifications

CABLE GLANDS AND ACCESSORIES 1/2" NPT						
Type	Certification	Operating temperature	Cable	Model Number	Diameter of the external cable	Under armor cable diameter
Barrier cable gland	IECEX/ATEX/EAC Ex	-60°C / +80°C (-76°F / +176°F)	Unarmoured cable	OCTEXB1/2C	3.0 - 8.0mm (0.12-0.31in)	–
		-60°C (-76°F) / +135°C (275°F)	Unarmoured cable	OCTEXB1/2P	12.5 - 14.0mm (0.5-0.55in)	–
			Armoured cable	OCTEXBA1/2P	15.5 - 21.1mm (0.61-0.83in)	–
Cable gland with gasket	IECEX/ATEX/EAC Ex	-60°C / +100°C (-76°F / +212°F)	Unarmoured cable	OCTEX1/2C	3.2 - 8.0mm (0.12-0.31in)	–
			Unarmoured cable	OCTEXS1/2C	6.5 - 11.9mm (0.26 - 0.47in)	–
			Armoured cable	OCTEXA1/2C	12.5 - 20.5mm (0.49 - 0.8in)	10 - 14.3mm (0.4 - 0.56in)
Plug EX 1/2" NPT	IECEX/ATEX/EAC Ex	-100°C (-148°F) / +400°C (752°F)	–	OEXPLUG1/2P	–	–

TECHNICAL DATA

GENERAL

Enclosure made of stainless steel AISI 316L
Water delivery pipe supplied

MECHANICAL

Pressure: 4bar max
Delivery head: 20m (66ft)
Pipe material: Antistatic plastic
Water tank capacity: 10l (2.6gal)
1 hole 1/2" NPT for cable entry
Dimensions (WxHxL): 429x697x255mm (16.9x27.4x10in)
Unit weight: 18kg (40lb)

ELECTRICAL

WASEX2T4AT, WASEX2T4GOR, WASEX2T4IN
Power supply: 24Vac or 24Vdc, 50/60Hz
Consumption: 5W
WASEX2T4KC
Power supply: 24Vdc
Consumption: 10.6W

ENVIRONMENT

WASEX2T4AT, WASEX2T4GOR, WASEX2T4IN
For indoors and outdoors installation
Operating temperature of solenoid valve: From -40°C (-40°F) up to +60°C (140°F)
Operating temperature of device: depending on the solidification temperature of the liquid
WASEX2T4KC
For indoors and outdoors installation
Operating temperature of solenoid valve: from -40°C (-40°F) up to +55°C (131°F)
Operating temperature of device: depending on the solidification temperature of the liquid

CERTIFICATIONS - EXPLOSION-PROOF APPLICATIONS

WASEX2T4AT
EAC EX:
• 1 Ex d IIC T4 Gb X, IP66 -40°C/+60°C
• Ex tb IIIC T130°C Db X, IP66 -40°C/+60°C
Solenoid valve:
ATEX (EN 60079-0: 2012+A11: 2013, EN 60079-1: 2014, EN 60079-31: 2014)
Ⓔ 2 II GD Ex d IIC T6 or T5 or T4 Gb
Ex tb IIIC T80°C or 95°C or T130°C Db IP66
Tamb -40°C to +35°C or +50°C or +60°C

WASEX2T4GOR

EAC EX:
• 1 Ex d IIC T4 Gb X, IP66 -40°C/+60°C
• Ex tb IIIC T130°C Db X, IP66 -40°C/+60°C

Solenoid valve:

EAC EX:
1 Ex d IIC T4 Gb X
Ex tb IIIC T130°C Db X, IP66 -40°C/+60°C

WASEX2T4IN

EAC EX:
• 1 Ex d IIC T4 Gb X, IP66 -40°C/+60°C
• Ex tb IIIC T130°C Db X, IP66 -40°C/+60°C

Solenoid valve:

INMETRO
Ex d IIC T4 Gb IP66
Ex tb IIIC T135°C Db IP66
Tamb -40/+60°C

WASEX2T4KC

Solenoid valve:
ATEX (EN60079-0, EN60079-1, EN60079-31)
Ⓔ 2 II GD Ex db mb IIC T4 Gb
Ex mb tb IIIC T135°C Db
Ta=-40°C to +55°C

IECEx (IEC 60079-0, IEC 60079-1, IEC 60079-31)

Ex db mb IIC T4 Gb
Ex mb tb IIIC T135°C Db
Ta=-40°C to +55°C

KCs (Employment and labor department 2016-54)

Ex d mb IIC T4
Ex mb tD A21 IP67 T135°C
Ta=-40°C to +55°C

CERTIFICATIONS - MARINE APPLICATIONS

Lloyd's Register Marine Type Approval certification:
• Test Specification Number 1 (ENV1, ENV2, ENV3, ENV5)
Electromagnetic compatibility: EN60945
Salty fog resistance: EN60068-2-52
Tested at 70°C (158°F) for 16 hours in compliance with EN60068-2-2

Used With



MVX2P0WF001A

High-Spec Ex-Proof Day/Night Camera in a Compact Design

Item Number: 2310131011



MVX-HD2-F0WAZ01A

Explosion-Proof IP Camera, 1080p, 30x zoom, Wiper

Item Number: 2310131010



MVX-HD210-WAZ00B Explosion-proof camera

Maximus MVX Delux Explosion-proof FULL HD CCTV camera

Item Number: 2310131022



MPXHD21A000C Series2 EX PTZ Camera

MPX Series 2 Delux IP PTZ Ex camera, super low-light, full HD

Item Number: 2310131030