

1490002010

## ITSV-2

Powerful Desktop Video Phone with 5" capacitive touch screen and support for 720p HD video.



This product has been replaced by [1490004010](#)

- ✓ Video desktop intercom station supporting ICX-AlphaCom, SIP and IC-EDGE solutions
- ✓ 4-core 1.3GHz ARM Cortex A53 processor with 2GB RAM and 8GB eMMC Flash
- ✓ Runs on Android 7.0 operating system
- ✓ 5.0" (1280x720) capacitive 5-point touch screen HD TFT LCD
- ✓ Built-in Bluetooth for syncing with mobile devices and connecting Bluetooth headsets
- ✓ Integrated dualband WiFi (2.4GHz & 5GHz)
- ✓ Built-in PoE/PoE+ to power the device and give it a network connection
- ✓ Built-in 1 mega-pixel CMOS tiltable camera for video calling with privacy wheel
- ✓ 6-way audio conferencing & 3-way 720p 30fps HD video conferencing capability
- ✓ Dual-mic HD speakerphone with noise reduction, advanced echo cancellation & excellent doubletalk performance
- ✓ Dual-switched auto-sensing 10/100/1000Mbps network ports
- ✓ Supports up to 16 SIP accounts

---


## Description

The ITSV-2 is a powerful desktop video phone featuring Android 7.0, a 5" capacitive touch screen, tiltable camera, HDMI output, dual microphones and support for 720p HD video. The ITSV-2 delivers advanced SIP telephony features and out-of-the-box integration with our IC-EDGE and ICX-AlphaCom IP intercom platforms.

Package contents: ITSV-2 unit, handset with cord, base stand, universal power supply, network cable, screen cleaning cloth, quick installation guide.

- ✓ [Go to Zenitel Wiki for more information](#)

## Technical Dimensions

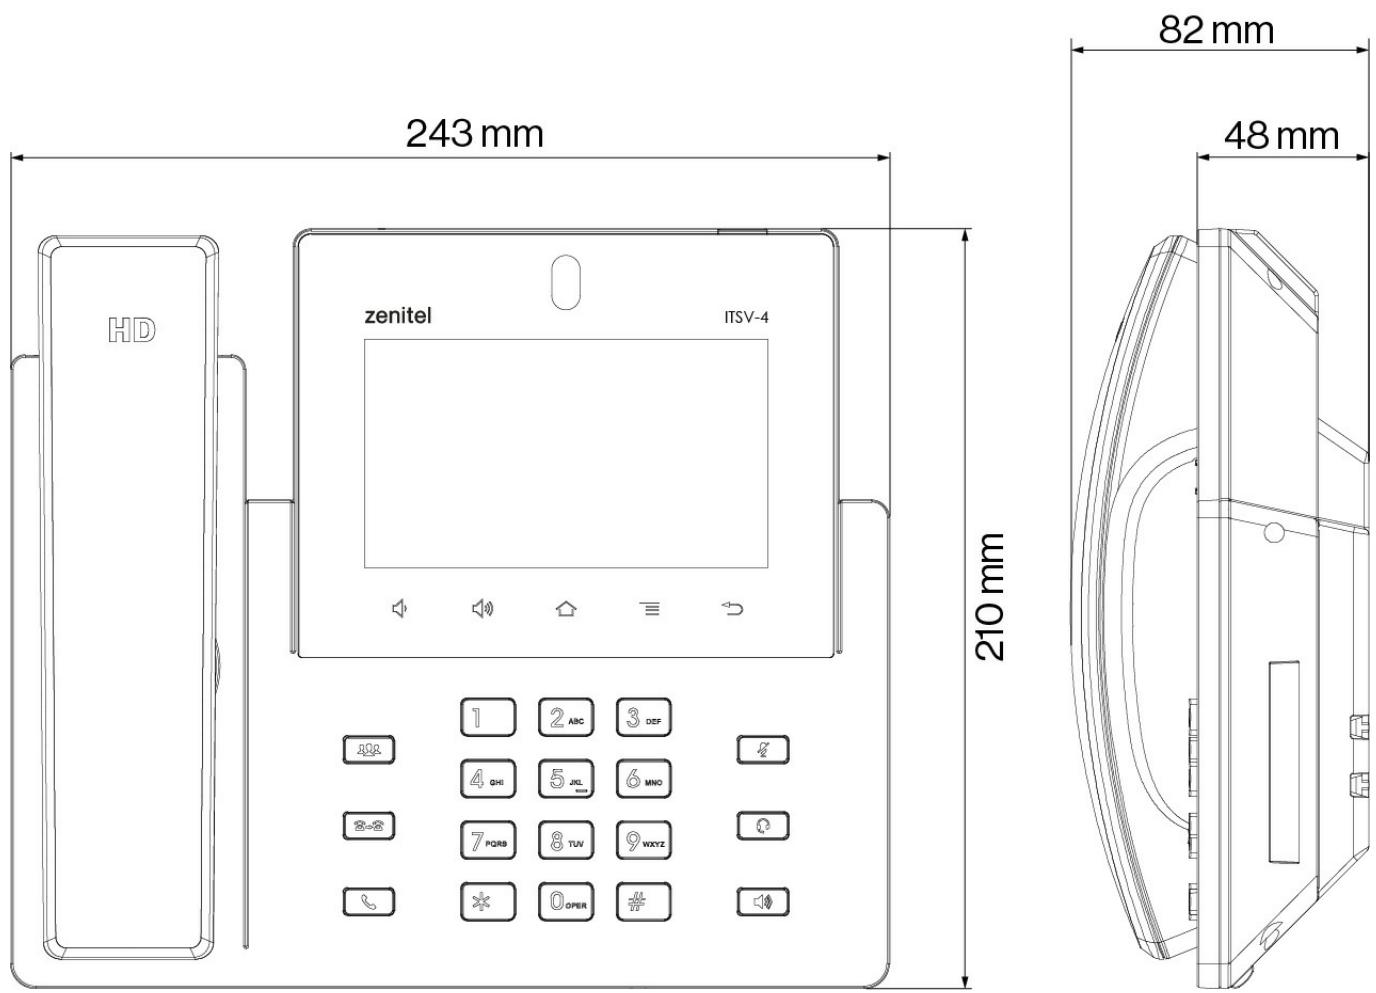

# Specifications

## SPECIFICATIONS

|                             |  |
|-----------------------------|--|
| Graphic Display             | 5.0 inch 1280×720 capacitive touch screen (5 points) HD TFT LCD  |
| Camera                      | Built-in 1 mega-pixel CMOS tiltable camera with privacy wheel, 720p 30fps  |
| Auxiliary Ports             | RJ9 headset jack (allowing EHS with Plantronics headsets), extension module port, USB port, HDMI-out (1.4 up to 720p30fps)   |
| Feature keys                | 11 functions keys for CONFERENCE, TRANSFER, SEND/REDIAL, MUTE, EARPHONE, SPEAKERPHONE, VOLUME +/-, 3 dedicated Android keys for HOME, MENU, and BACK                                       |
| Video Codec                 | H.263, H.264 BP/MP/HP  |
| Video resolution            | Up to 720p   |
| Video frame rate            | Up to 30 fps   |
| Operating temperature range | 0°C to +40°C   |
| Storage temperature range   | -10°C to +60°C   |
| Relative humidity           | 10% - 90% non-condensing   |
| Power options               | Power over Ethernet (PoE & PoE+) or power adapter.   |
| Power over Ethernet         | 802.3af Class 3, 802.3at Class 4   |
| Power adapter               | Input: 100-240VAC 50-60Hz; Output 12VDC 1.5A   |
| Network Interface           | 2 x RJ45 (Ethernet) 10/100/1000 Mbps with integrated PoE   |
| Bluetooth                   | Integrated, Bluetooth 4.2 + EDR  |
| Wi-Fi                       | Integrated, dual-band 2.4 & 5GHz with 802.11 a/b/g/n   |
| Security                    | User and administrator level passwords, MD5 and MD5-sess based authentication, 256bit AES encrypted configuration file, TLS, SRTP, HTTPS, 802.1x media access control                      |
| Protocols/Standards         | SIP RFC3261, TCP/IP/UDP, RTP/RTCP, HTTP/HTTPS, ARP, ICMP, DNS (A record, SRV, NAPTR), DHCP, PPPoE, SSH, TFTP, NTP, STUN, SIMPLE, LLDP-MED, LDAP, TR-069, 802.1x, TLS, SRTP, IPv6, OpenVPN® |
| Audio technology            | Wide-band Opus, wide-band G.722, G.711µ/a, G. 729A/B, G.726-32, iLBC, in-band and out-ofband DTMF (In audio, RFC2833, SIP INFO), VAD, CNG, AEC, PLC, AJB, AGC, ANS                         |
|                             | English, German, Italian, French, Spanish, Portuguese, Russian   |

|                    |   |
|--------------------|---|
| Language support   | Spanish, Portuguese, Russian, Croatian, Chinese, Korean and Japanese  |
| Compliance         | FCC: Part 15 Class B; Part 15 Subpart C(15.247); Part 15 Subpart E(15.407); Part 68 HAC IC: RSS-247; RSS-Gen; RSS-102; IECS-003; CS03 CE: EN 55032; EN 55035; EN 61000-3-2; EN 61000-3-3; EN 62368-1; EN 301 489-1; EN 301 489-17; EN 300 328; EN 301 893; EN 62311 RCM: AS/NZS CISPR 32; AS/NZS 4268; AS/NZS 62368.1; AS/CA S004 |
| Dimensions (HxWxD) | 68.7 x 243 x 210 mm   |
| Weight             | 1 kg  |

## Accessories



[Wall-Mount Bracket for ITS-V-2](#)

## Used With



[TCIV-2+](#)

IP and SIP Video Intercom



[TCIV-3+](#)

IP and SIP Video Intercom



[TCIV-5+](#)

IP and SIP Video Intercom



[TCIV-6+](#)

IP and SIP Video Intercom



[TKIV+ Video Intercom kit](#)

Turbine Video - VoIP Intercom Module