3005010199

SPA-W1-V2

Weatherproof PA Panel
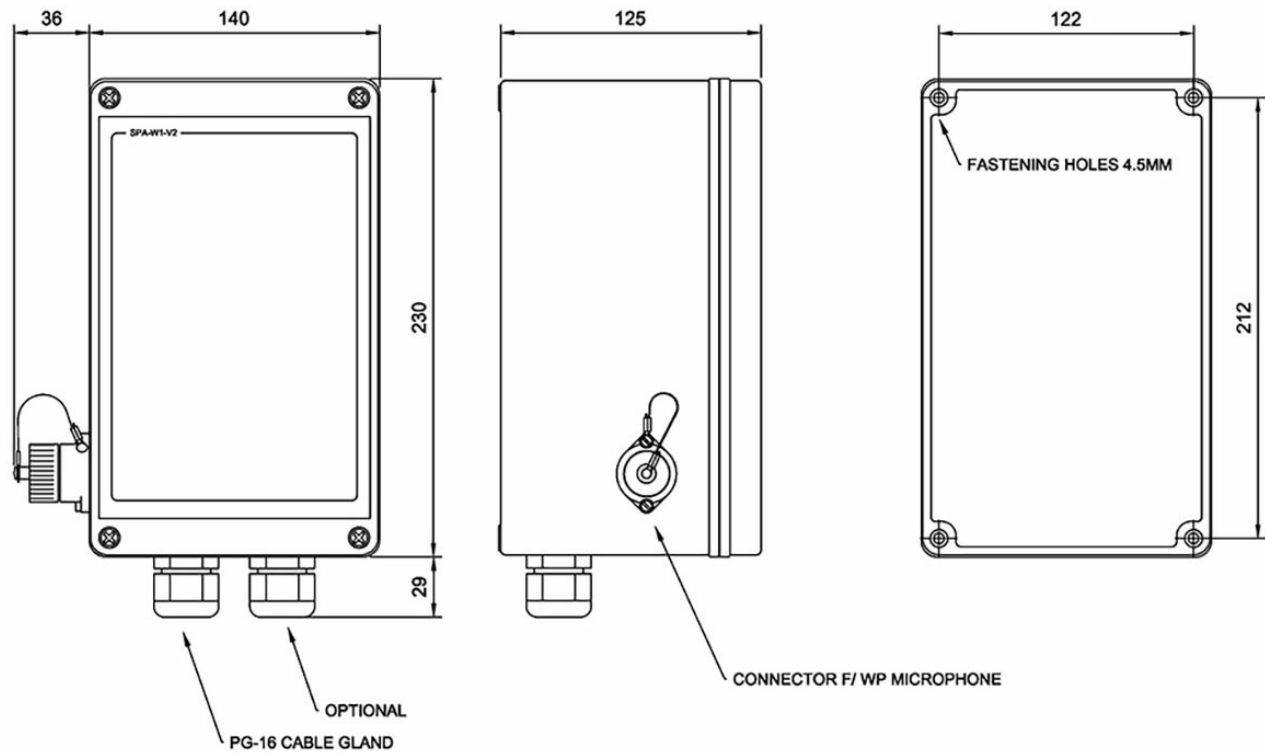
IP66

Description

✓ Weatherproof PA panel for single system

✓ Built-in pre-amplifier with preset signal level and tone controls

✓ Requires microphone with PTT

✓ Plug for WP handheld microphone P-66 or P-66/10

✓ Wall mounting outdoor / Indoor

✓ Local mute contact for external loudspeaker (from hardware version 4.0)

This waterproof panel gives All Call Message in a SPA-V2 public address and general alarm single system.
Local mute function is used to break audio to loudspeakers where proximity to pa panel cause feedback.

Available from hardware version 4.0 This function must be in combination with relay box.

Technical Dimensions

FASTENING HOLES 4.5MM

CONNECTOR F/ WP MICROPHONE

OPTIONAL
PG-16 CABLE GLAND

Specifications

GENERAL

Size (WxHxD)	140 x 230 x 125
Weight	0. 5 kg
Material	ABS plastic
Mounting	Wall
Output signal	0.775Vrms / 0dB
Sensivity microphone	200 ohm / 0,5mV
Connections	Plugable screw terminals for 2.5 mm 2 cable
Cable glands	2 x PG-16
Cable size	6 x 2 x 0.75mm2
Protection	IP-66
Operating temperature	-25°C TO +55°C
Environmental Condition	Exposed

Accessories

P-66

Handheld Microphone
Waterproof

P-66/10

Handheld Microphone with
10-Meter Cable Waterproof