zenitel

DATASHEET



2340000013

CW-4T/VOF/F

Wall Loudspeaker 6W with Volume Control and Override. Failsafe

Description

- Wall loudspeaker with transformer for accommodation area
- Volume Control, Override and Fuse
- Ideal for PA, intercom and background music
- With 100V line transformer
- Failsafe operation. Bypasses volume control when no 24VDC is present

Screw the bracket on the wall, and fasten the cabinet to the bracket with one screw.
For optimum performance, always use the correct voltage/power and operate within the frequency limits as stated.


Technical Dimensions

www.zenitel.com info@zenitel.com Last revision date: 2023-12-01 07:35


Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.


REAR VIEW

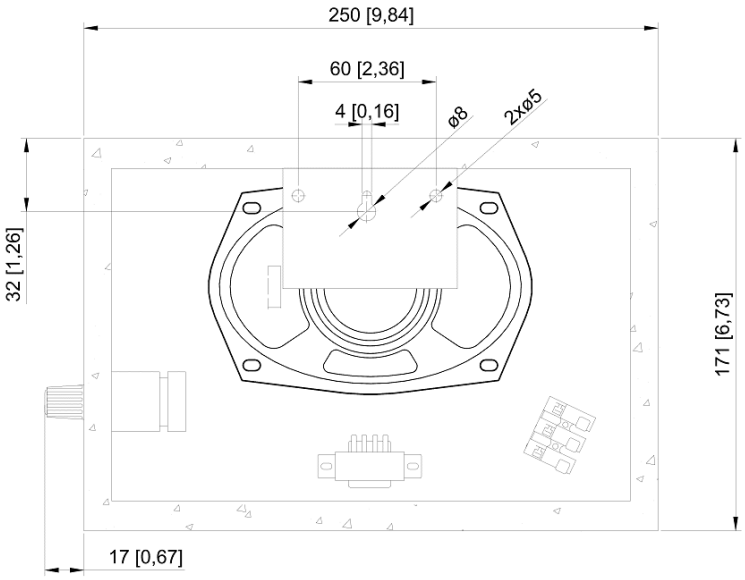

RIGHT VIEW

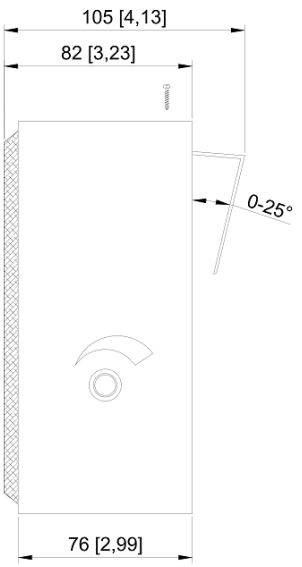

CIRCUIT DIAGRAM

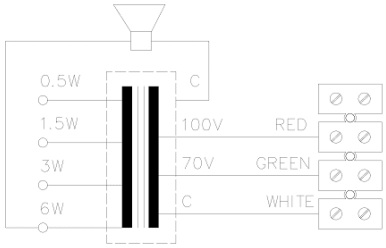

Secondary nominal tappings

C: 6	6,0W
C: 3	3,0W
C: 1,5	1,5W
C: 0,5	0,5W

www.zenitel.com info@zenitel.com Last revision date: 2023-12-01 07:35

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

GENERAL

Dimensions (mm)	250W x 170H x 88D
Weight	1.2 kg
Mounting	Screws, keyhole
Material/ Color	Particle board / White or walnut
Temperature range	Max. / min. amb. temp 90°C / -40°C
Max. / min. ambient temperature	90°C / -40°C
Connections	Spring clamp
Rated / max. power	6W / 8 W
SPL 1W/1m	90dB
SPL rated power	97dB
Effective freq. range	140 - 20000Hz
Dispersion	(-6dB)1kHz / 4kHz 140° / 80°
Relay (PA override)	24VDC. 16.5mA
Environmental Condition	Protected

CONNECTIONS

100V line	Terminals: A, B
24VDC relay	Terminals: +, -

www.zenitel.com info@zenitel.com Last revision date: 2023-12-01 07:35

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.