4000015154

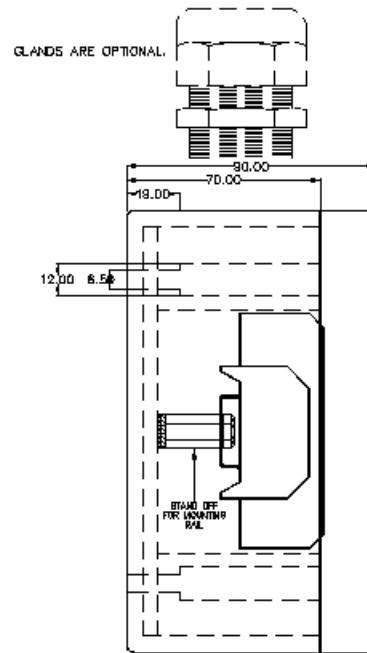# P-4052

Junction Box for VSP - Up to 4 telephones

Onboard communication

Technical Dimensions

www.zenitel.com   info@zenitel.com

GLANDS ARE OPTIONAL

GLANDS ARE OPTIONAL.

90.00
70.00
19.00
12.00 6.5

STAND OFF
FOR MOUNTING
RAIL

160.00 110.00

BOLT FOR
CONNECTION
OF SCREEN

BOLT FOR
CONNECTION
OF SCREEN

140.00
160.00

GLANDS ARE OPTIONAL

www.zenitel.com   info@zenitel.com
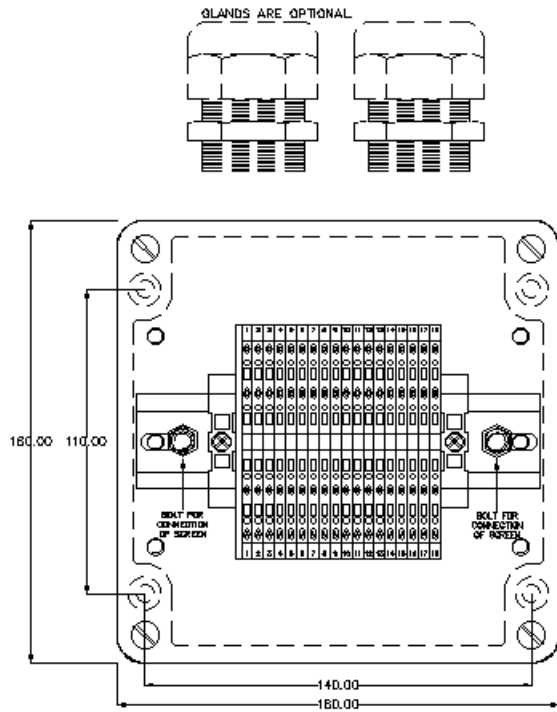
Specifications

MECHANICAL

Dimensions (WxHxD)	160x160x90mm
Weight	1.5 kg
Color	RAL 7000
Material	Polyester
Mounting	Wall
Fixing	4 x M6 bolts
Access	Front
Cable Entry	Bottom/Top
Cable Gland	Optional (4x PG21 or M40 - max)

ELECTRICAL

Termination	18 pcs Wago 2002-1401 0.25 - 2.5 mm²
Compass Safe Distance	> 5 m

ENVIRONMENTAL

Temperature	-25°C to +55°C (Storage: -25°C to +70°C)
Humidity	+93% (at +40°C)
Ingress Protection Rating	IP-56

BOLT FOR CONNECTION OF SCREEN

BOLT FOR CONNECTION OF SCREEN
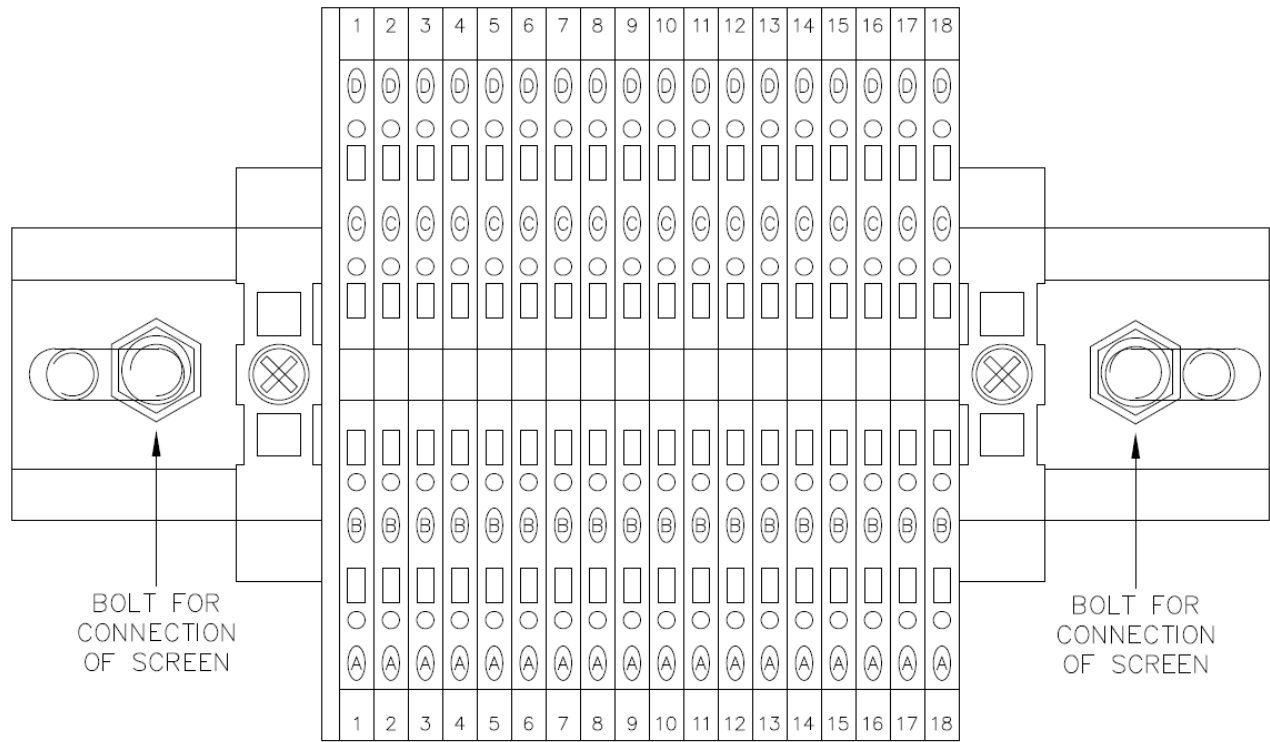
Accessories

M40 Cable Gland for VSP Junction Box, preinstalled

M40 Cable Gland for VSP Junction box

Used With

VSP-211-L

Main Station - Batteryless Telephone System - 12-Way

VSP-213-L

Main Station - Batteryless Telephone System - 12-Way

VSP-223-L

Main Station - Batteryless Telephone System - 12-Way

VSP-122

Main Station

VSP-122P

Portable Station Batteryless Telephone System 12-Way