zenitel

DATASHEET



4000017652

6111

Industrial UpN intercom station

- Weather protected unit
- Loudspeaking / handset operation
- Loudspeaker connection
- Built-in relay for external signal, max 5A
- Manual PTT (push-to-talk) key
- ACT key. (line active)
- 3 pcs direct access programmable keys. (M1-M2-M3)
- 10 pcs accessible programmable keys. (0-9)
- Volume control key (VOL) with override
- Program key. (P)

Description


6111 is a weather protected digital intercom unit with handset, and can also be used with external loudspeaker.

Technical Dimensions

www.zenitel.com info@zenitel.com Last revision date: 2022-08-26 09:28

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

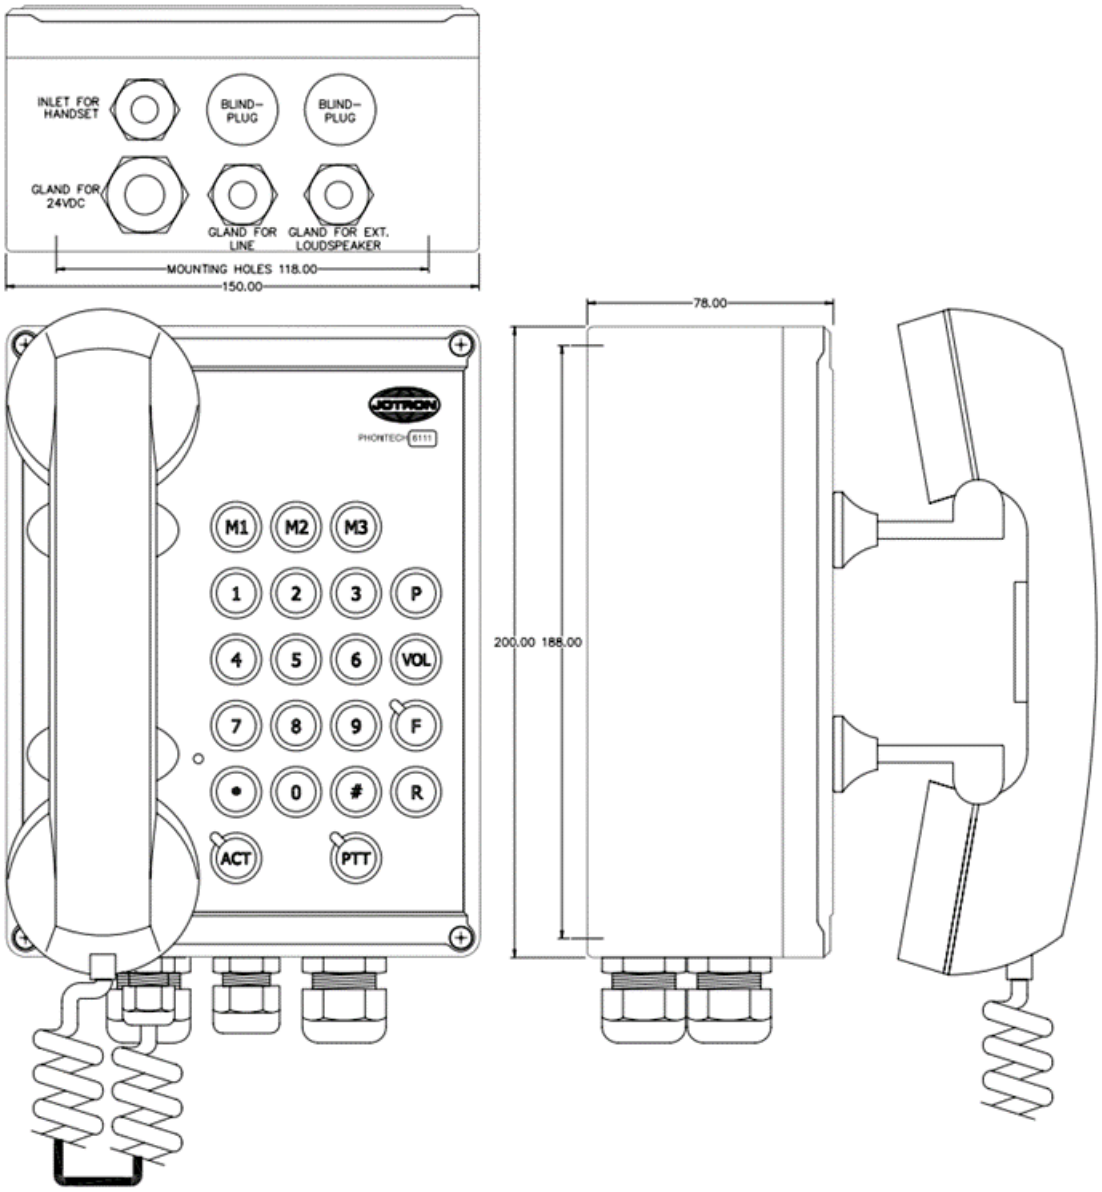

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

ELECTRICAL SPECIFICATIONS:

Power supply	24VDC
Power consumption	15W (with external loudspeaker)
Termination	Screw terminals
Compass safe distance	>5m

ENVIRONMENTAL SPECIFICATIONS:

Temperature	-25°C to +55°C
Humidity	93% relative humidity (at +40°C)
Ingress protection	IP56

MECHANICAL SPECIFICATIONS:

Dimension (WxHxD)	150x200x154mm
Weight	1.2kg
Material	ABS
Colour	RAL 7035
Mounting	To wall
Fixing	4 pcs M4 bolts
Access	Front
Cable entry	Bottom
Gland type	PG-7, 9 & 13,5

COMPLIANCY:

Complies to IEC 60945 Marine equipment

www.zenitel.com info@zenitel.com Last revision date: 2022-08-26 09:28

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.